KILLARK®

FXSD21 - XSD/XSX/FXSD/FXSX Series - FXSD Single Gang Aluminum Manual Motor Starting Switch - 1 Pole Single Phase - Dead-End - Hub Size 3/4 In

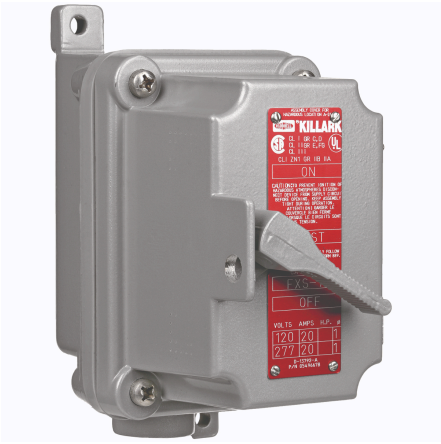

By Killark
Catalog # FXSD21

XSD/XSX/FXSD/FXSX Series - FXSD Single Gang Aluminum Manual Motor Starting Switch - 1 Pole Single Phase - Dead-End - Hub Size 3/4 In

Features

- Motor running protection when overload heaters are used.
- Factory Sealed so no external seals are required.
- Type 3 (raintight) rated.
- Enclosures are cast copper-free aluminum alloy.
- Operating shaft is stainless steel.
- Multiple gang assemblies available in combination with pilot lights, pushbuttons and switches on request.
- Ground flange joint between bolted cover and box provide required flame path.
- Provisions for padlocking switch in either “ON” or ”OFF” position is standard.

Application

Provides manual starting and stopping of small AC or DC motors. Motor running protection when overload heaters are used.

Specifications

Nema Rating	3
UL File Number	E53360 / E12379
Buy America(n) Qualified	Contact Manufacturer
CSA File Number	LR11714
Hazardous Rating(s)	• Class I, Divisions 1 & 2, Groups C, D • Class I, Zones 1 & 2, Groups IIB, IIA • Class II, Divisions 1 & 2, Groups E, F, G • Class III, Divisions 1 & 2

Current

Frequency Rating	60 Hz
Voltage Rating	230 V

Dimensions

Height	6.813 in
Width	5.344 in
Length	3.688 in
Gross Weight with Packaging	4.4
Dimensions	3.688 in x 5.344 in x 6.813 in

General

Product Family	Motor Starters
UPC	783936197319
Type	Aluminum Manual Motor Starting Switch With Overload Protection
Material	Aluminum, Copper Free (less than 4/10 of 1%)
Series	FXSD Series

Operational

Horsepower - Maximum	1

Product Assets

Catalog [English]
Catalog Page [English]

© 2026 Hubbell Incorporated. All rights reserved