



GR Series, 3.75 X 3.75 X 2.68, Class I, II, III, BCDEFG, Cast Aluminum, Type 4, Without Screw Cover Enclosure

By Killark
Catalog # GRBB

GR Series, 3.75 X 3.75 X 2.68, Class I, II, III, BCDEFG, Cast Aluminum, Type 4, Without Screw Cover Enclosure

Features


- Compact rectangular enclosures with threaded screw covers provide easy access to interior.
- High strength, lighter weight, corrosion resistant copper free cast aluminum construction.
- Available with a flat blank or dome covers.
- Cover o-ring, Nitrile (BUNA-N) material, supplied standard supplied standard for a Type 4X rating.
- Cast mounting lugs are standard on all boxes.
- Internal ground screw supplied on all boxes.
- Electrostatically applied gray powder epoxy/polyester finish on exterior of box and cover.
- Mounting pans are available.
- Conduit and device openings factory or field installed.

Application

Hazardous locations due to the presence of flammable gases or vapors, combustile dusts or easily ignitable fibers or flyings, and areas which are subject to corrosion, weather, and dampness. Installations at petroleum refineries, chemical and petrochemical

Specifications

ATEX File Number	PTB 02 ATEX 1071U / PTB 02 ATEX 1072
CSA File Number	LR11716
IECEX File Number	IEC E x 05.0029U / IEC E x 05.0028
Nema Rating	3, 4, 4X
UL File Number	E10514 / E83696

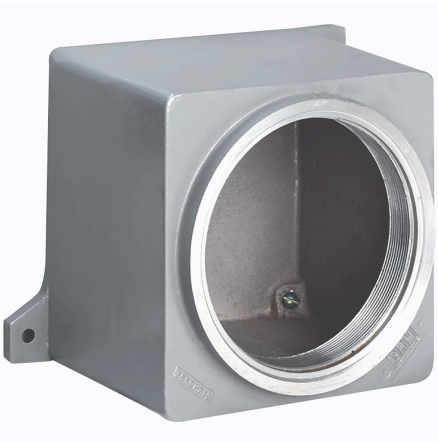

Buy America(n) Qualified
Hazardous Rating(s)

- Contact Manufacturer
- Class I, Divisions 1 & 2, Groups B, C, D
 - Class I, Zones 1 & 2, Groups IIB+H2, IIA
 - Class II, Divisions 1 & 2, Groups E, F, G
 - Class III, Divisions 1 & 2

Dimensions

Length	6.63 in
Height	4.38 in
Width	6 in
Gross Weight with Packaging	5.5
Dimensions	6.63 in x 6 in x 4.38 in

General

Color	Gray
Product Family	Enclosures
Series	GR Enclosures Series
UPC	783936228006
Type	Enclosure Only
Material	Copper-free aluminum
Cover Type	Threaded

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[English\]](#)
- [Installation Manual \[English\]](#)