



# KRJC Series - 20 Amp Receptacle With Enclosure - 2P 3W Circuit- 115/230VAC At 60Hz - Hub Size 3/4 Inch

By Killark  
Catalog # [KRJC-220](#)

KRJC Series - Aluminum 20 Amp Receptacle With Enclosure - 2W 3P Circuit- 115/230VAC At 60Hz - Hub Size 3/4 Inch

## Features

- Suitable where a connection is required for portable or movable equipment such as tools, motors, hand lights, etc.
- Wire leads for termination
- Factory sealed receptacles
- Copper free aluminum housing
- Straight or angle type back boxes
- Delayed action contacts ensure safe interconnect
- Extra long grounding pin makes contact first and breaks contact last

## Application


KR Series receptacles are suitable: in hazardous locations due to the presence of flammable vapors or gases;where a heavy duty plug and receptacle is necessary;where a connection is required for portable or movable equipment such as tools, motors, hand

## Specifications

|                          |                                                                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Nema Rating              | 7 (C, D)                                                                                                                                       |
| Buy America(n) Qualified | Contact Manufacturer                                                                                                                           |
| Hazardous Rating(s)      | <ul style="list-style-type: none"><li>• Class I, Divisions 1 &amp; 2, Groups C, D</li><li>• Class I, Zones 1 &amp; 2, Groups IIB,IIA</li></ul> |
| EU RoHS Indicator        | Contact Manufacturer                                                                                                                           |

## Conductor

|                 |   |
|-----------------|---|
| Number Of Poles | 2 |
| Number Of Wires | 3 |

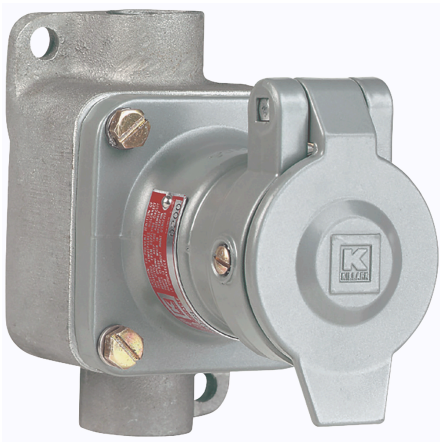

## Configuration

|             |           |
|-------------|-----------|
| Hub Pattern | Feed-Thru |
|-------------|-----------|

## Current

|                 |      |
|-----------------|------|
| Amperage Rating | 20 A |
|-----------------|------|

## Dimensions

|                             |                          |
|-----------------------------|--------------------------|
| Height                      | 5.63 in                  |
| Width                       | 4 in                     |
| Hub Size                    | 3/4"                     |
| Length                      | 5.56 in                  |
| Gross Weight with Packaging | 2.7                      |
| Dimensions                  | 5.56 in x 4 in x 5.63 in |

## General

|                 |                                              |
|-----------------|----------------------------------------------|
| Color           | Gray                                         |
| UPC             | 783936390949                                 |
| Type            | Pin & Sleeve                                 |
| Receptacle Type | Delayed Action                               |
| Material        | Aluminum, Copper Free (less than 4/10 of 1%) |
| Series          | KR Series                                    |

## Logistics

|                |                |
|----------------|----------------|
| Factory Sealed | Factory Sealed |
|----------------|----------------|

## Product Assets

[Catalog \[English\]](#)