KILLARK®

KR Series - 60 Amp Receptacle With Enclosure - Includes 3Close-Up Plugs - 3P 4W Circuit - 115/230VAC At 60Hz - Hub Size 1 Inch

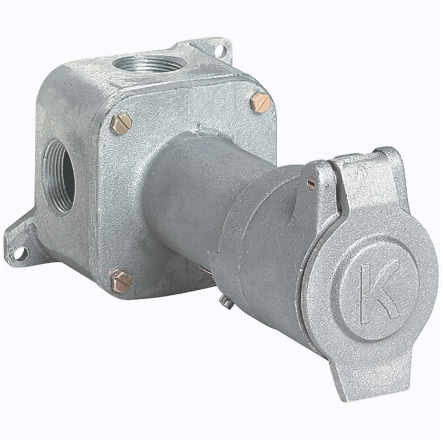

By Killark
Catalog # KRJX-3604

KR Series - Aluminum 60 Amp Receptacle With Enclosure - Includes 3Close-Up Plugs - 3W 4P Circuit - 115/230VAC At 60Hz - Hub Size 1 Inch

Features

- Suitable where a connection is required for portable or movable equipment such as tools, motors, hand lights, etc.
- Wire leads for termination
- Factory sealed
- Copper free aluminum housing
- Straight or angle type back boxes
- Delayed action contacts ensure safe interconnect
- Extra long grounding pin makes contact first and breaks contact last

Application

KR Series receptacles are suitable: in hazardous locations due to the presence of flammable vapors or gases;where a heavy duty plug and receptacle is necessary;where a connection is required for portable or movable equipment such as tools, motors, hand

Specifications

Nema Rating	7 (C, D)
Buy America(n) Qualified	Contact Manufacturer
Hazardous Rating(s)	• Class I, Divisions 1 & 2, Groups C, D • Class I, Zones 1 & 2, Groups IIB,IIA
EU RoHS Indicator	Contact Manufacturer

Conductor

Number Of Poles	3
Number Of Wires	4

Configuration

Hub Pattern	Feed-Thru

Current

Amperage Rating	60 A

Dimensions

Height	5.63 in
Width	7 in
Hub Size	1″
Length	15.75 in
Gross Weight with Packaging	6.6
Dimensions	15.75 in x 7 in x 5.63 in

General

Color	Gray
UPC	783936391588
Type	Pin & Sleeve
Receptacle Type	Delayed Action
Material	Aluminum, Copper Free (less than 4/10 of 1%)
Series	KR Series

Logistics

Factory Sealed	Factory Sealed

Product Assets

Catalog [English]

© 2026 Hubbell Incorporated. All rights reserved