

OPTOTRONIC Driver with DEXAL Technology

78034 / OTi50/120-277/1A4 DX L



The OSRAM OPTOTRONIC LED Programmable Driver with DEXAL Technology, is a non-proprietary, intra-luminaire interface that enables bi-directional communications between the driver and the fixture integrated component. It provides exact luminaire-specific data, including diagnostics, to light management systems. Fixture manufacturers can design smart fixtures and streamline the configuration process by leveraging DEXAL as a standard bi-directional communications interface.



Product family features

- Two-way communication and power between driver and fixture integrated components
- Helps streamline luminaire configuration and manufacturing process (one driver can support multiple LMS)
- Enables exact luminaire-specific data including: - Power consumption - Temperature profile - Operating hours - Diagnostics
- OEM Programmable with 1mA resolution to perfectly match LED load and maximize performance
- Integrated OEM programmable features include:- Constant lumen maintenance- End-of-life indication- LED thermal protection- Dim-to-off- Soft start
- Programming doesn't require powering up or connecting the power supply to AC line voltage
- Specification grade dimming down to 1%
- Slim form factors
- Input voltage: - Universal 120-277 V_{AC} 50/60Hz
- UL Class 2 output for safe operation

Areas of application

- Indirect/direct
- Linear
- Recessed troffer

Technical data

General product information


Product Name	OTI501202771A4DXL 20/CS 1/SKU
Ordering Abbreviation	OTi50/120-277/1A4 DX L
Brand Name	OSRAM
General Description	50W Constant Current programmable LED driver with DALI control dimmable to 1%
Programmable Features	Output Current/Dimming: Linear & Log./DEXAL/LED thermal protection/Constant lumen output/End-of-life indicator
Programming Tool	51645 & 51647/51648
Type	Constant Current, Class2
Product Number	78034

Electrical data


Nominal Total Max Wattage	50.00 W
Nominal Voltage	120.00-277.00 V




—

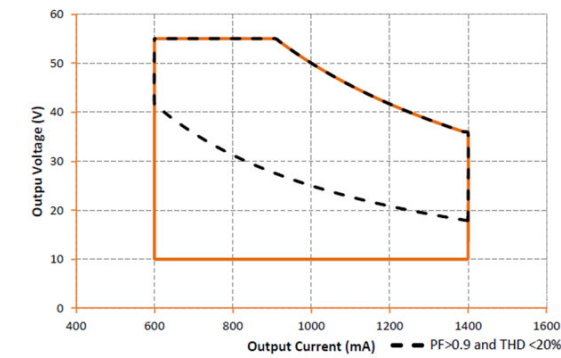


Operating Window

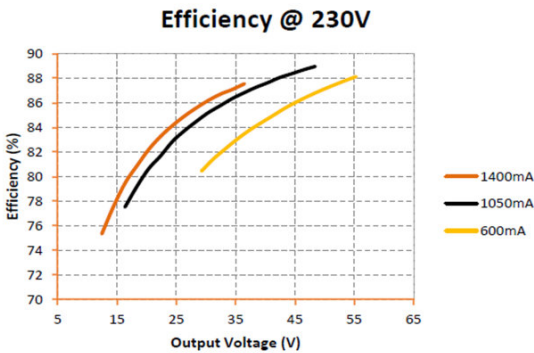


Typical Efficiency v Load 230 V 50 Hz

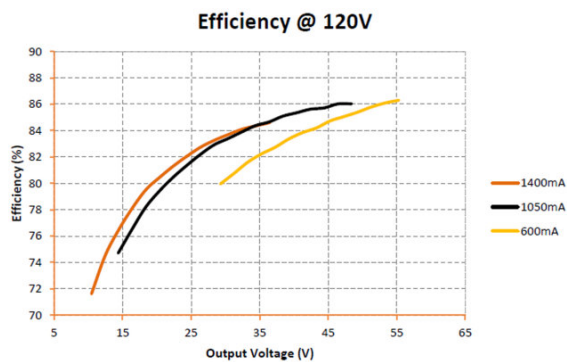


Typical Efficiency v Load 120 V 60 Hz

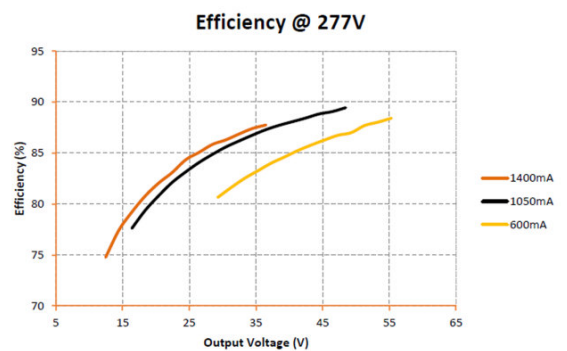


Typical Efficiency v Load 277 V 60 Hz

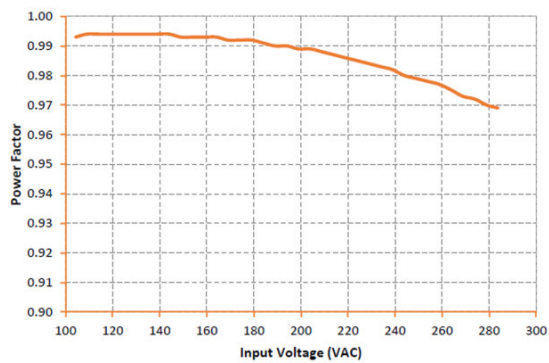


Typical Power Factor v Load

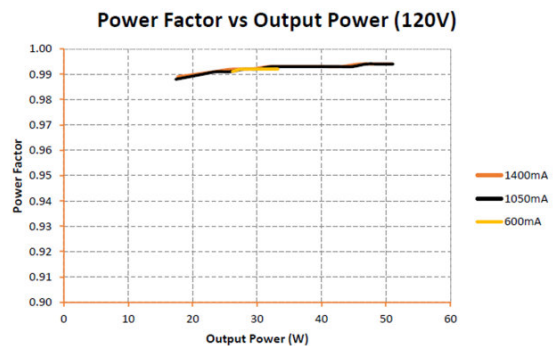


Typical Power Factor v Load

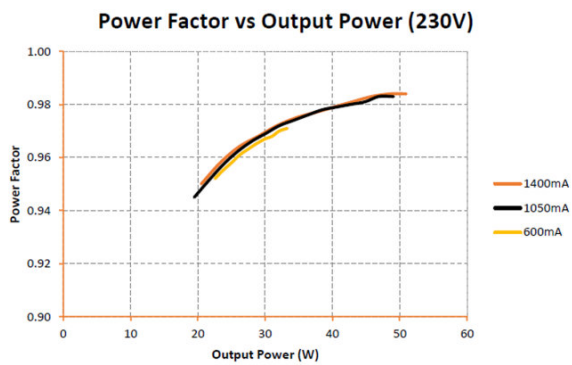


Typical Power Factor v Load

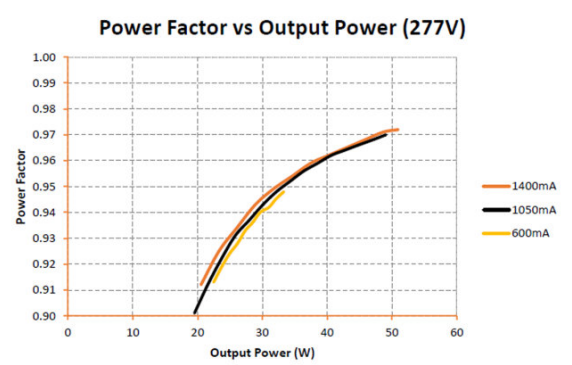



Typical Power Factor v Load

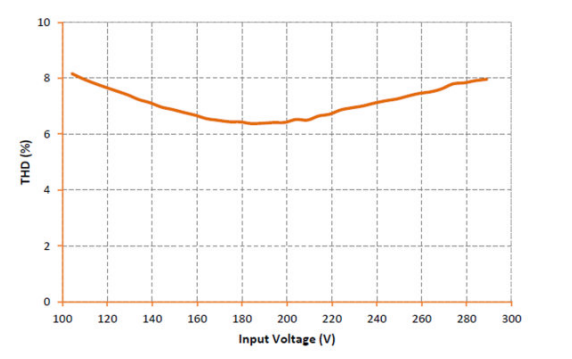

Typical THD v Load


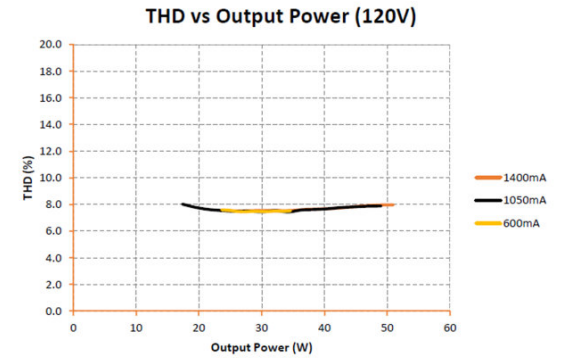


Typical THD v Load

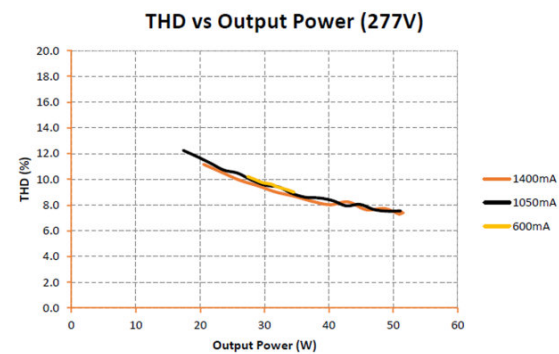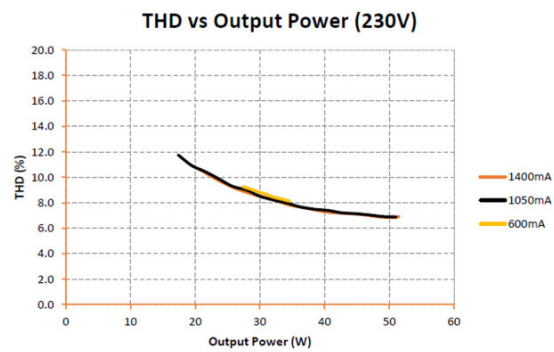



Typical THD v Load

Typical THD v Load

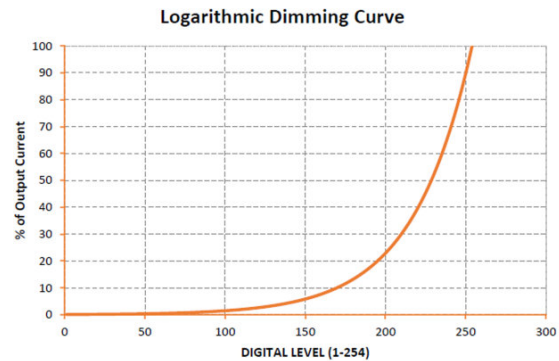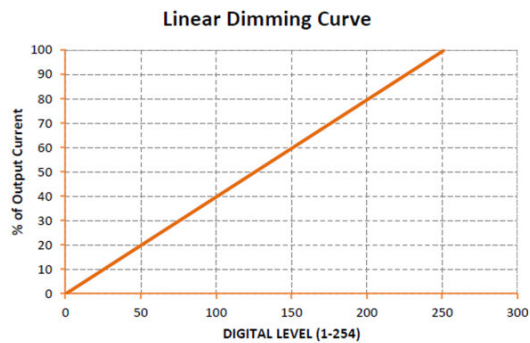

0-10 V Control Input

0-10 V Control Input

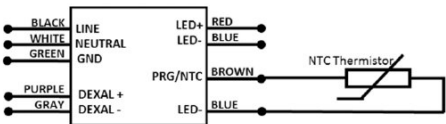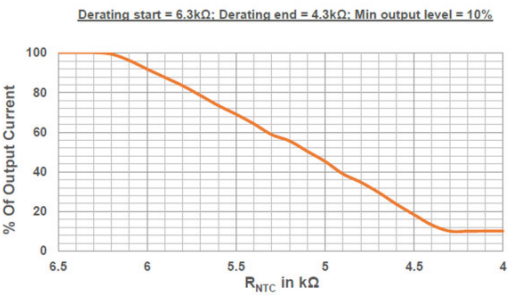

LED Thermal Protection perc. of Out Curr

LED Thermal Protection - Wiring Diagram

Electrical specifications - Dimming

Dimming Control	DEXAL (Digital Dimming)
Dimming Range	1-100%
Dimming Type	Analog
Standby Power	0.40W(120V) 0.55W(277V)

Electrical specifications - Input

Efficiency @ Full load 120V	≥86%
Efficiency @ Full load 277V	≥86%
Frequency Range (Hz)	50 – 60 Hz (+/- 10%)
Input Current (A) 120V	0.51
Input Current (A) 277V	0.22
Input Voltage (VAC)	120V-277V (+/- 10%)
Inrush Current (Apk, T@50% of Apk) 120V	15.5, 180μs
Inrush Current (Apk, T@50% of Apk) 277V	40.3, 195μs
Power Factor @ Full load 120V	>0.9
Power Factor @ Full load 277V	>0.9
THD @ Full load 120V	<20%
THD @ Full load 277V	<20%

Electrical specifications - LED thermal protection (NTC)

Product datasheet

NTC Value Active Range	≤25kΩ
Temperature Derating start	User defined

Electrical specifications - Output

LED Power-Up Time	<1sec
Line Regulation	<5%
Load Regulation	<5%
Max. Output Power (W)	50W
Output Current (mA)	600-1400mA (1mA step)
Output Ripple Current	<20% @ 1400mA
Output Short-Circuit Protection	Yes, non-latching
Output Voltage (VDC)	10-56VDC
Over Load Protection	Yes, non-latching
Over Temperature Protection	Foldback at 95°C
Over Voltage Protection	Yes, non-latching
Voltage Rating (DEXAL)	12V typ.
Peak Current (DEXAL)	125mA max

Environmental specifications

Ambient Operating Temperature	-30°C to 50°C
Case Temperature (Tc)	75°C (50kHrs)
EMI Compliance	FCC Part 15 Class A
Max. Relative Humidity (%)	85% non-condensing
Max. Storage Temp.	70°C
Sound Rating	Class A
Transient Protection	NEMA SSL 1 - 2010 / Non-Roadway 2.5KV
UL Environmental Rating	Dry & Damp
UL File number	E320395

ISOLATION	Input / Mains	DALI	LED Output	Case
Input / Mains	-	Basic	SELV	Basic
DALI	Basic	-	Supplementary	Supplementary
LED Output	SELV	Supplementary	-	Basic
Case	Basic	Supplementary	Basic	-

Packaging Information

Product datasheet

Item number	EAN/UPC	Packaging	Quantity	Outside dimensions l x w x h	Gross weight
78034	4052899345836	Unpacked (SKU)	1		
78034	4052899328938	Shipping box (Case)	20	14.8 in x 6.9 in x 5.6 in	13.9 lb

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Mandatory

Product name	Accessory name	Item number	EAN/UPC
OTi50/120-277/1A4 DX L	OT PROGRAMMER	51645	▶ 4052899209640

Data privacy

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.mynosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here. However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Disclaimer

For information on specific product warranties, visit www.osram.us/warranty. Specifications are subject to change without notice. OSRAM, OPTOTRONIC, PrevaLED and DEXAL are registered trademarks of OSRAM GmbH. SensiLUM is a trademark of OSRAM SYLVANIA Inc. All other trademarks are those of their respective owners.