
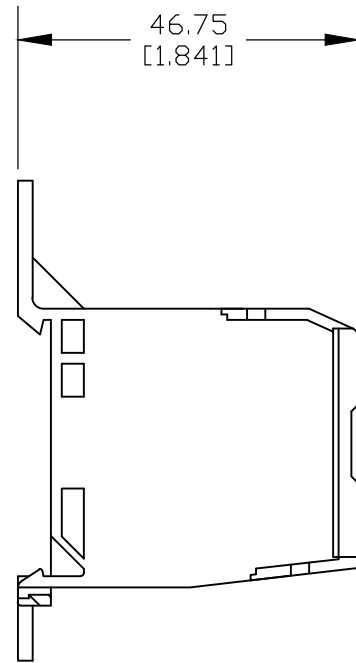
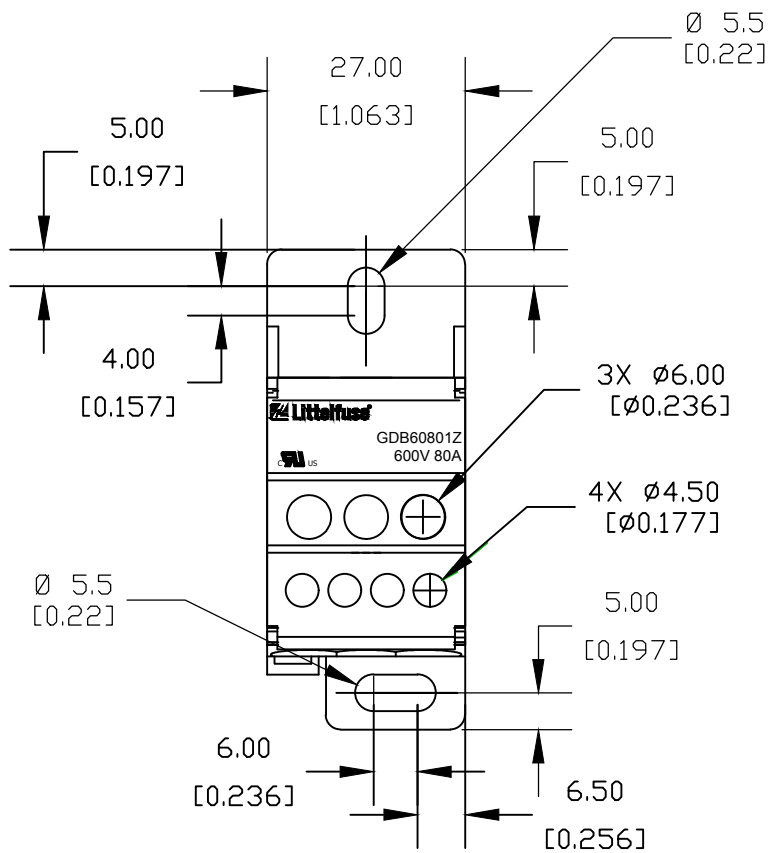
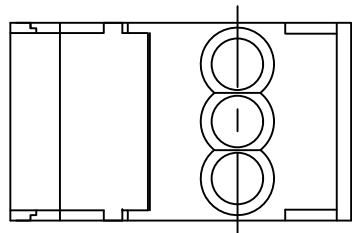
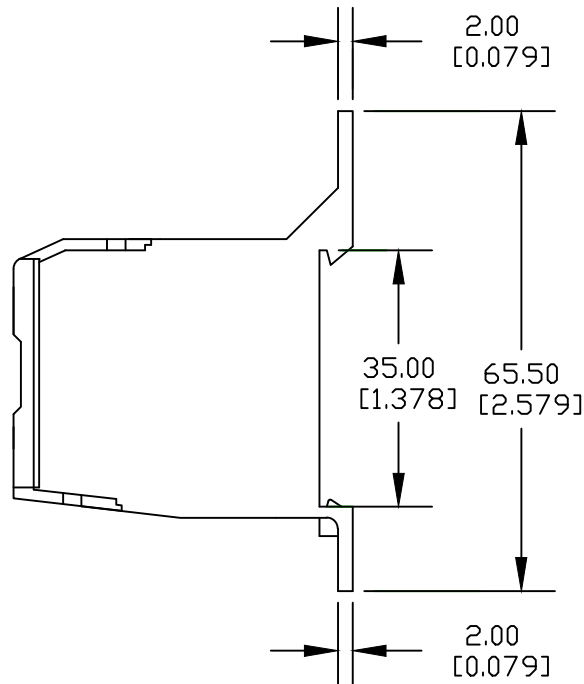


PART NO.
GDB60801Z

LTR	DATE	REVISION	CHK	APD
A	4/17/18	519180GCP - RELEASE MRY		

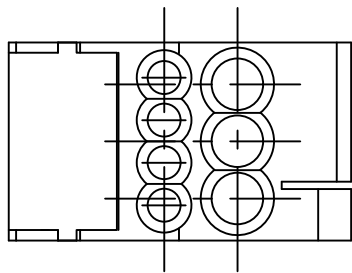

NOTES:

1. AGENCY INFORMATION:
UL FILE NO. E309688
2. MATERIALS:
INSULATOR-THERMOPLASTIC
CONNECTOR-BRASS
3. TERMINATION:
LINE: 8-14 AWG
LOAD: (2) 8-4 AWG
(4) 10-14 AWG
4. RATINGS:
600V
MAXIMUM AMP PER POLE-80A
5. TORQUE:
LINE: 13.5 IN-LB
LOAD: 8-4 AWG 13.5 IN-LB
10-14 AWG 7.2 IN-LB

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.						
●	DENOTES CRITICAL CHARACTERISTICS.					
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE					
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.					
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.			C		
COPIES TO		MATL SPEC				
1	9	18	FINISH			
2	10	19				
3	12	20				
4	13	21	DRW M YORK	DATE	04/09/18	SCALE
5	14	23	CHK	DATE	SUPER DR	
6	15	33	APPD	DATE	RAW STK WT	
7	16	43			LBS/M	
8	17	53				
TITLE						
80A IEC DISTRIBUTION BLOCK OUTLINE						
 Littelfuse® CHICAGO, ILLINOIS 60631			REVISION A	DRWG. NO. 0L-GDB6080	FINAL	

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED