
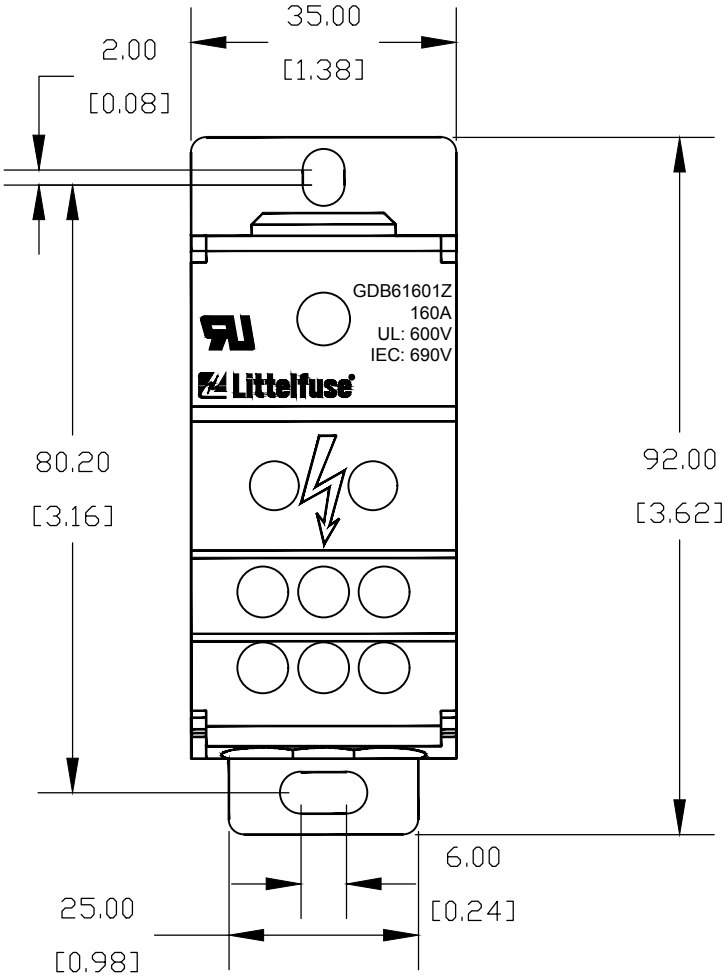
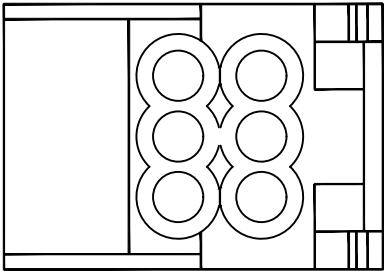
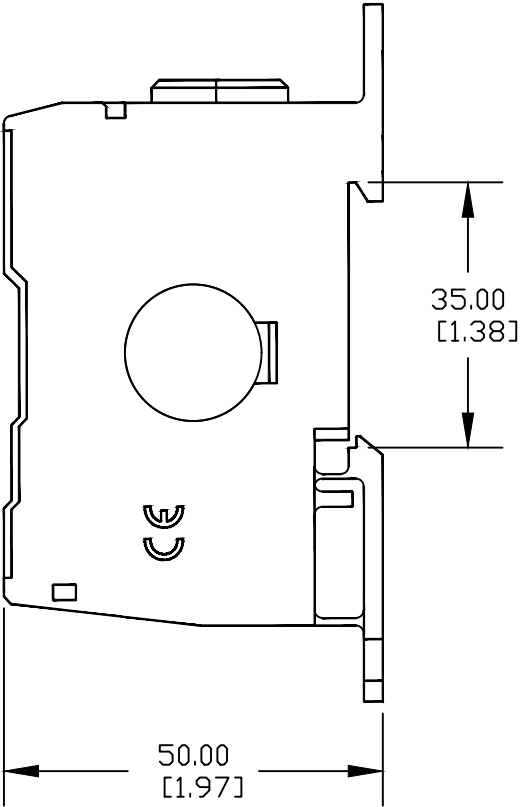


PART NO.
GDB61601Z

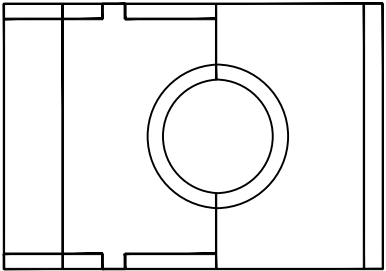

- NOTES:
1. AGENCY INFORMATION:
UL FILE NO. E309688
 2. MATERIALS:
INSULATOR-THERMOPLASTIC
CONNECTOR-BRASS
 3. TERMINATION:
LINE: 8AWG-2/0
LOAD: 4-14 AWG
 4. RATINGS:
600V
MAXIMUM AMP PER POLE-160A
 5. TORQUE:
LINE: 35.5 IN-LB
LOAD: 17.5 IN-LB

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

● DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.

CP DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL									
LTR		COPIES TO		MTRL SPEC		FINISH		NONE	
A		1 9 18		DRW		DATE		SCALE	
		2 10 19		M YDRK		4/9/18			
		3 12 20		CHK		DATE		SUPER DRW	
		4 13 21				DATE		RAW STK WT	
		5 14 23		APPD		DATE		LBS/M	
		6 15 33							
		7 16 43							
		8 17 53							

TITLE									
GDB6160 SERIES DISTRIBUTION BLOCK OUTLINE									
CHK		APD		REVISION		DRAWG NO.		DL-GDB6160	
				A					

