

THROUGH ROOF PVC ASSEMBLY, PARALLEL CONDUCTOR TO IN-LINE
CONDUCTOR, COPPER IN-LINE CONDUCTOR, BI-METALLIC PARALLEL
CONDUCTOR, 20" ROD

CATALOG NUMBER

LPC66518BI



CERTIFICATIONS



FEATURES

Allows for lightning protection conductors to be concealed in ceiling or walls

Use in-line connection for conductor and secure to structure using base plate

PRODUCT ATTRIBUTES

Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

Material: Aluminum; Copper; Polyvinylchloride; Stainless Steel 18-8 (EN 1.4305)

Connection Material, In-Line Conductor: Copper

Connection Material, Parallel Conductor: Bi-Metallic

Rod Length: 20"

Rod Size: 1/2"


Outer Diameter: 1.9"

Unit Weight: 2.75 lb

ADDITIONAL PRODUCT DETAILS

Always consult the roof manufacturer or owner for proper flashing materials.

DIAGRAMS

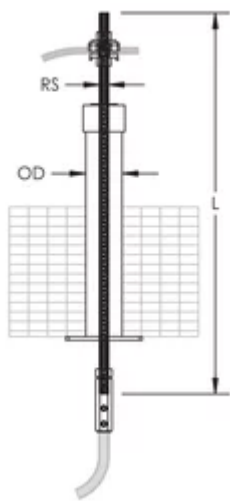

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

⚠ WARNING: ⚠ WARNING: This product can expose you to chemicals including vinyl chloride, which is known to the State of California to cause cancer. - For more information go to-www.P65Warnings.ca.gov.

North America +1.800.753.9221 Option 1 – Customer Care Option 2 – Technical Support	Europe Netherlands: +31 800-0200135 France: +33 800 901 793	Europe Germany: 800 1890272 Other Countries: +31 13 5835404	APAC Shanghai: + 86 21 2412 1618/19 Sydney: +61 2 9751 8500
---	--	--	--