




CLEVIS HANGERS

**Fig. 450V
PLASTIC PIPE
CLEVIS HANGER**



FUNCTION: Designed for the suspension of flexible plastic pipe lines. Used in conjunction with Fig. 450T.

MATERIAL: Low carbon steel

FINISH: Plain or electro-galvanized

ORDERING: Specify size number and figure number.


Available in stainless steel.
To order, specify 304 or 316 and add
suffix SS to figure number.
Price on request.

"D" Adjustment
(Top of cross bolt to bottom of hanger rod nut.)

Size No.	Pipe Size		Rod Size A	B		C		Adjustment D		E		Cross Bolt	Max. Rec. Load		Wt. Each	
													lbs.	kN	lbs.	kg
1	1/2	(15)	3/8	4 3/4	(120.65)	5 1/2	(139.70)	1 5/8	(41.28)	4 5/16	(109.54)	1/4	150	(.67)	.38	(.17)
1	3/4	(20)	3/8	4 9/16	(115.89)	5 1/2	(139.70)	1 5/8	(41.28)	4 1/8	(104.78)	1/4	150	(.67)	.38	(.17)
1	1	(25)	3/8	6 3/8	(161.93)	5 1/2	(139.70)	1 5/8	(41.28)	3 15/16	(100.01)	1/4	150	(.67)	.38	(.17)
1	1 1/4	(32)	3/8	4 1/8	(104.78)	5 1/2	(139.70)	1 5/8	(41.28)	3 11/16	(93.66)	1/4	150	(.67)	.38	(.17)
1	1 1/2	(40)	3/8	4	(101.60)	5 1/2	(139.70)	1 5/8	(41.28)	3 9/16	(90.49)	1/4	150	(.67)	.38	(.17)
1	2	(50)	3/8	3 11/16	(93.66)	5 1/2	(139.70)	1 5/8	(41.28)	3 1/4	(82.55)	1/4	150	(.67)	.38	(.17)
2	2 1/2	(65)	5/8	6 5/8	(168.28)	8 3/4	(222.25)	1 3/4	(44.45)	5 13/16	(147.64)	3/8	150	(.67)	1.15	(.52)
2	3	(80)	5/8	6 3/16	(157.16)	8 3/4	(222.25)	1 3/4	(44.45)	5 3/8	(136.53)	3/8	150	(.67)	1.15	(.52)
2	3 1/2	(90)	5/8	5 13/16	(147.64)	8 3/4	(222.25)	1 3/4	(44.45)	5	(127.00)	3/8	150	(.67)	1.15	(.52)
2	4	(100)	5/8	5 7/16	(138.11)	8 3/4	(222.25)	1 3/4	(44.45)	4 5/8	(117.48)	3/8	150	(.67)	1.15	(.52)

Note: Use of an upper locknut ensures proper performance.

**Fig. 450T
PLASTIC PIPE
SUPPORT TROUGH**

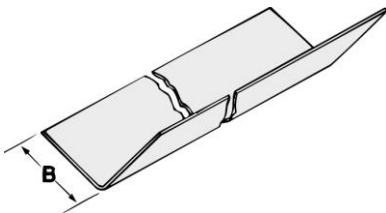

FUNCTION: Designed for use with Fig. 450V as a support for plastic or other flexible pipe systems. Hangers should be placed as close to the trough joints as possible.

MATERIAL: Low carbon steel

FINISH: Pre-galvanized

ORDERING: Specify size number and figure number.

Size No.	For Pipe Sizes		B		Steel Gauge	Trough Length		Max. Rec. Load		Weight Per Foot	
						ft.	M	lbs.	kN	lbs.	kg
1	1/2 - 2	(15 - 50)	1 1/2	(38.1)	18 ga.	10	(3.05)	150	(.67)	.540	(.245)
2	2 1/2 - 4	(65 - 100)	3	(76.2)	18 ga.	10	(3.05)	150	(.67)	1.08	(.488)

Available in stainless steel.
To order, specify 304 or 316 and add
suffix SS to figure number.
Price on request.

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.