




WALL BRACKETS

Fig. 855
MEDIUM DUTY
WALL BRACKET

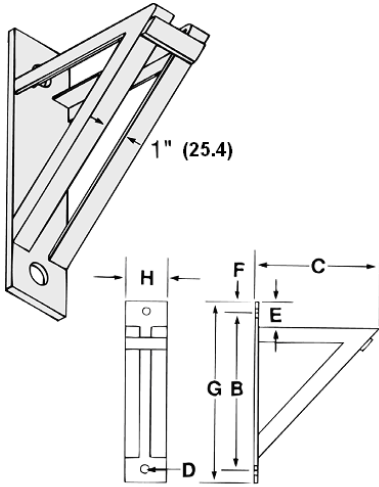

FUNCTION: Designed for the support or suspension of loads up to 1500 lbs (6.67kN). from walls or structures. The 1" (25.4) space between the angles allows the rod to be placed anywhere along the length of the brackets.

APPROVALS: Complies with Federal Specifications A-A-1192A (Type 32) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 32).

MATERIAL: Low carbon steel

FINISH: Plain or electro-galvanized

ORDERING: Specify type number and figure number.

Available in stainless steel.
To order, specify 304 or 316 and add suffix SS to figure number.
Price on request.

Type No.	B	C	Hole Size D	E	F
0	15 ¹ / ₂ (393.7)	12 (304.8)	1 ³ / ₁₆ (20.64)	2 ¹ / ₂ (63.5)	1 ¹ / ₄ (31.75)
1	21 ¹ / ₂ (546.1)	18 (457.2)	1 ³ / ₁₆ (20.64)	2 ¹ / ₂ (63.5)	1 ¹ / ₄ (31.75)
2	27 ¹ / ₂ (698.5)	24 (609.6)	1 ³ / ₁₆ (20.64)	2 ¹ / ₂ (63.5)	1 ¹ / ₄ (31.75)

Type No.	G		H		Angle Iron Size	Max. Rec. Load		Wt. Each	
						lbs.	kN	lbs.	kg
0	18	(457.2)	4	(101.6)	1 ¹ / ₂ x 1 ¹ / ₂ x ³ / ₁₆ (38.1 x 38.1 x 4.76)	1500	(6.67)	17.4	(7.89)
1	24	(609.6)	4 ¹ / ₂	(114.3)	1 ³ / ₄ x 1 ³ / ₄ x ³ / ₁₆ (44.45 x 44.45 x 4.76)	1500	(6.67)	27.3	(12.38)
2	30	(762.0)	5	(127.0)	2 x 2 x ¹ / ₄ (50.8 x 50.8 x 6.35)	1500	(6.67)	47.6	(21.59)

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.