




THREADED ACCESSORIES

Fig. 40
COACH SCREW ROD

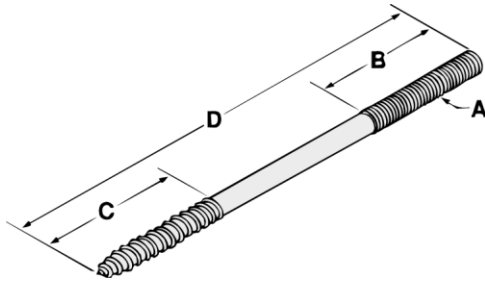

FUNCTION: Designed for use as a vertical hanger attachment to wood structures.

MATERIAL: Low carbon steel

FINISH: Plain or electro-galvanized

ORDERING: Specify rod size, length, finish and figure number.

Rod Size A	Minimum Length				Max. Rec. Load		Wt. Each									
							Length D									
	Machine B		Coach C				lbs.	kN	4 (101.6)		6 (152.4)		8 (203.2)		10 (254.0)	
					lbs.	kg			lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg
3/8	2	(50.80)	2	(50.80)	390	(1.73)	.12	(0.05)	.19	(0.09)	.25	(0.11)	.31	(0.14)	.37	(0.17)
1/2	2	(50.80)	2 1/2	(63.50)	640	(2.85)	.22	(0.10)	.34	(0.15)	.44	(0.20)	.56	(0.25)	.67	(0.30)

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.