

PIPE STRAPS



FUNCTION: Designed to hold pipe, conduit, or tube flush with mounting surface for light duty applications.

MATERIAL: Low carbon steel

FINISH: Electro-galvanized or copper plated

ORDERING: Specify pipe, conduit, or tube size and figure number.


Fig. 825 & 826 TWO HOLE STRAP

Fig. 825 STRAP FOR IRON PIPE & CONDUIT

Fig. 826 STRAP FOR COPPER TUBE

Fig. 825									
Pipe Size		B		C		D		Wt. Each	
								lbs.	kg
1/4	(6)	1 5/8	(41.28)	1 1/8	(28.58)	5/8	(15.88)	.01	(.01)
3/8	(10)	2 3/8	(60.33)	1 5/8	(41.28)	1 1/16	(17.46)	.03	(.01)
1/2	(15)	2 5/8	(66.68)	1 7/8	(47.63)	7/8	(22.23)	.04	(.02)
3/4	(20)	2 3/4	(69.85)	2 1/8	(53.98)	1 1/8	(28.58)	.05	(.02)
1	(25)	3 3/8	(85.73)	2 5/8	(66.68)	1 7/16	(36.51)	.06	(.03)
1 1/4	(32)	4 1/4	(107.95)	3 3/16	(80.96)	1 13/16	(46.04)	.08	(.04)
1 1/2	(40)	4 1/2	(114.30)	3 1/2	(88.90)	1 15/16	(49.21)	.10	(.05)
2	(50)	5 3/8	(136.53)	4 1/8	(104.78)	2 9/16	(65.09)	.13	(.06)
2 1/2	(65)	6	(152.40)	4 1/2	(114.30)	3 1/16	(77.79)	.20	(.09)
3	(80)	7 1/4	(184.15)	5 3/4	(146.05)	3 3/4	(95.25)	.50	(.23)
4	(100)	8 3/8	(212.73)	5 3/4	(146.05)	4 11/16	(119.06)	.51	(.23)

Fig. 826									
Tube Size		B		C		D		Wt. Each	
								lbs.	kg
1/4	(6)	1 5/8	(41.28)	1 1/8	(28.58)	3/8	(9.53)	.01	(.01)
3/8	(10)	1 13/16	(46.04)	1 5/16	(33.34)	1/2	(12.70)	.01	(.01)
1/2	(15)	1 15/16	(49.21)	1 7/16	(36.51)	5/8	(15.88)	.01	(.01)
3/4	(20)	2 1/4	(57.15)	1 3/4	(44.45)	7/8	(22.23)	.01	(.01)
1	(25)	2 3/4	(69.85)	2 1/4	(57.15)	1 1/8	(28.58)	.01	(.01)
1 1/4	(32)	2 5/8	(66.68)	2 1/8	(53.98)	1 3/8	(34.93)	.04	(.02)
1 1/2	(40)	2 7/8	(73.03)	2 3/8	(60.33)	1 5/8	(41.28)	.05	(.02)
2	(50)	3 3/8	(85.73)	2 7/8	(73.03)	2 1/8	(53.98)	.05	(.02)

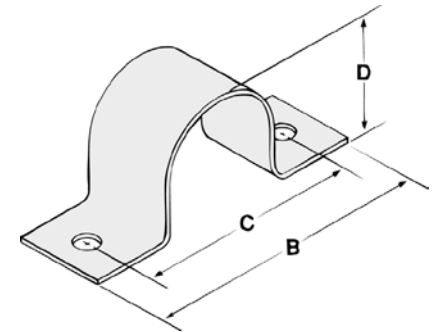

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.