



MasterConnect T8

14.5T8/48-835/MF20/MC IA 10/1

MasterConnect, LEDtube, T8, 1200 mm, 14.5 W, 3500 K, 2000 lm, 70000 hour(s)

MasterConnect, LEDtube, T8, 1200 mm, 14.5 W, 3500 K, 2000 lm, 70000 hour(s), 137.00 lm/W, G13 Rotatable end-cap, Plastic

Product data

General Information	
Cap-Base	G13 Rotatable end-cap
Nominal lifetime	70,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LEDtube
Light Technical	
Color Code	835 [CCT of 3500K]
Beam Angle (Nom)	160 degree(s)
Luminous Flux	2,000 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	137.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	14.5 W

Lamp Current (Max)	125 mA
Lamp Current (Min)	59 mA
Wattage Equivalent	32 W
Starting Time (Nom)	1 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
UL Type	UL Type B
Temperature	
T-Case Maximum (Nom)	45 °C
Controls and Dimming	
Dimmable	Wireless Dim
Connectivity	Interact Ready
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	1,200 mm
Bulb Shape	T8

MasterConnect T8

Net Weight (Piece)	0.220 kg
--------------------	----------

Approval and Application


Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance
EU RoHS compliant	Yes
Ambient temperature range	-20 °C to 45 °C

Application Conditions

can it be used in closed luminaires	Yes
Wireless Technology	Not applicable


Product Data	
Order product name	14.5T8/48-835/MF20/MC IA 10/1
Full product name	14.5T8/48-835/MF20/MC IA 10/1
Order code	562736
Material Nr. (12NC)	929002456604
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677562731
Numerator - Packs per outer box	10
EAN/UPC - Case	50046677562736

Dimensional drawing

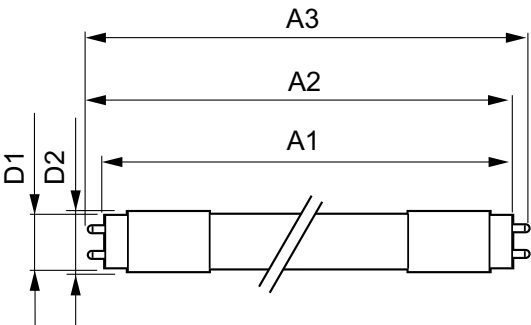


Product	D1	D2	A1	A2	A3
14.5T8/48-835/MF20/MC IA 10/1	25.7 mm	28 mm	1,198 mm	1,205 mm	1,212 mm

Photometric data

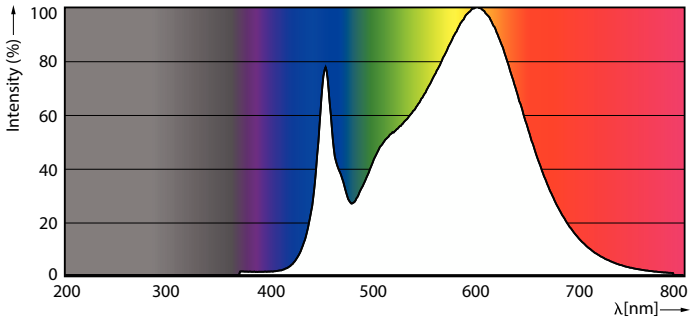


Spectral Power Distribution Colour - 14.5T8/48-835/MF20/MC IA 10/1

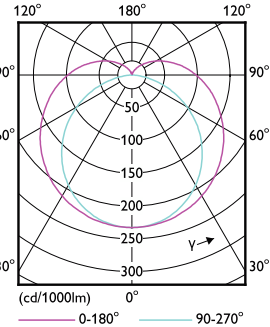

Light Distribution Diagram - 14.5T8/48-835/MF20/MC IA 10/1


Photometric data




General uniform lighting - 14.5T8/48-835/MF20/MC IA 10/1

General uniform lighting - 14.5T8/48-835/MF20/MC IA 10/1


Lifetime

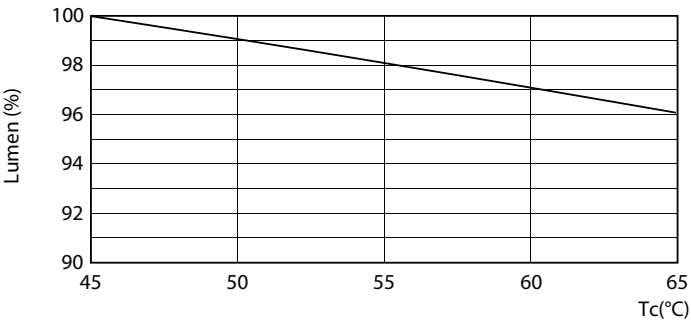


Lumen Maintenance Diagram - 14.5T8/48-835/MF20/MC IA 10/1

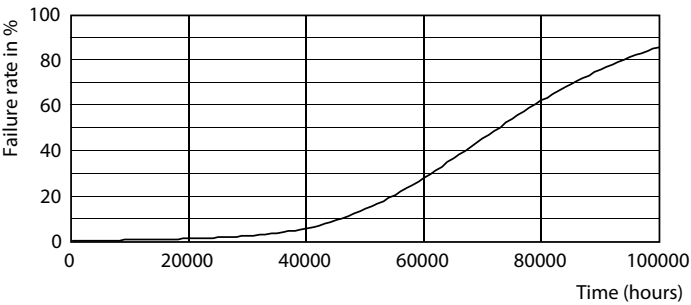

Life Expectancy Diagram

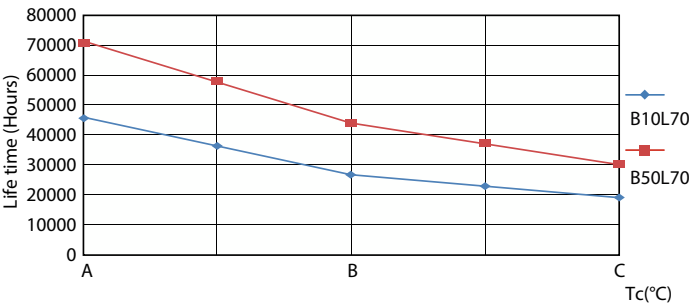


LEDtube_70K_LifetimeVsTc-LED

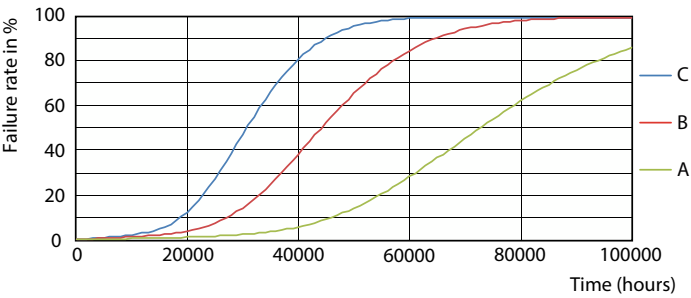

LEDtube_70K_FailureRate-LED

MasterConnect T8

Lifetime

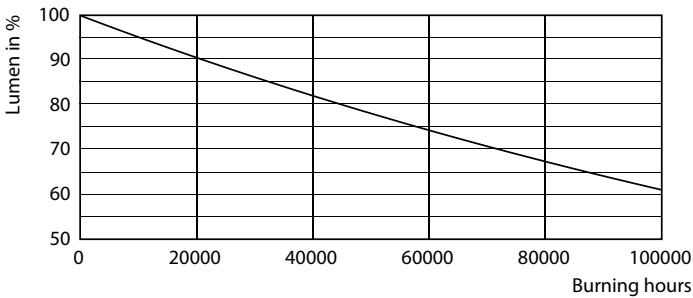

Lumen Maintenance Diagram - 14.5T8/48-835/MF20/MC IA 10/1

