



Party Spot

13.5PAR38/PER/YELLOW/G/E26/ND/ULW 3/1PF

Philips 13.5-watt PAR 38s provide bright colorful light perfect for special occasions, parties and holidays. These PAR 38 lamps are available in up to four different colors and offer a festive touch to your home lighting. Brighten up your home and celebrate with color using these energy saving LED bulbs.

Product data

General Information	
Lighting Technology	LED
Switching Cycle	10,000
Rated Lifetime (Hours)	10,950 hour(s)
Nominal lifetime	10,950 hour(s)
Cap-Base	E26 [Single Contact Medium Screw]
Light Technical	
Color Code	Yellow
Color Designation	Yellow
Color Consistency	<6
Color rendering index (CRI)	-
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	60 Hz
Input Frequency	60 Hz
Power Consumption	13.5 W
Lamp Current (Nom)	165 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5


Voltage (Nom)	120 V
Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	65 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Bulb Shape	PAR38 [PAR 4.75 inch/121mm]
Approval and Application	
Suitable For Accent Lighting	Yes
EU RoHS compliant	Yes
Product Data	
Order product name	13.5PAR38/PER/YELLOW/G/E26/ND/ULW 3/1PF
Order code	929001306633
Numerator - Quantity Per Pack	1

Party Spot

Numerator - Packs per outer box	3
Material number (12NC)	929001306633
Full product name	13.5PAR38/PER/YELLOW/G/E26/ND/ULW 3/1PF



EAN/UPC - Case	50046677568271
----------------	----------------

Dimensional drawing



Product	D	C
13.5PAR38/PER/YELLOW/G/E26/ND/ULW 3/1PF	122 mm	132 mm



Photometric data



Light Distribution Diagram - 13.5PAR38/PER/YELLOW/G/E26/ND/ULW 3/1PF

Accent Lighting Spots - 13.5PAR38/PER/YELLOW/G/E26/ND/ULW 3/1PF

Lifetime

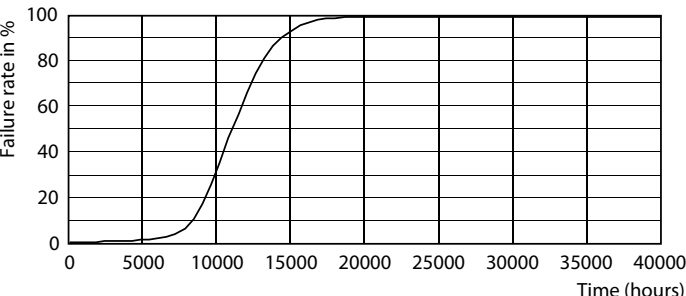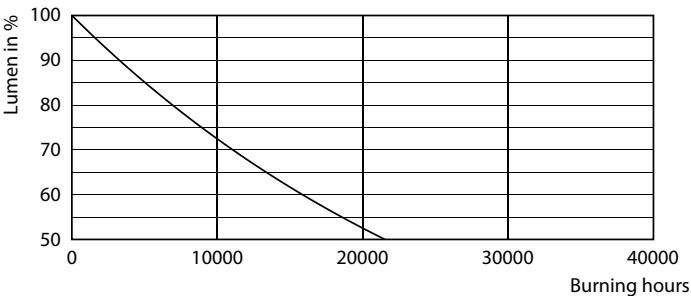

Lumen Maintenance Diagram - 13.5PAR38/PER/YELLOW/G/E26/ND/ULW 3/1PF

Life Expectancy Diagram - 13.5PAR38/PER/YELLOW/G/E26/ND/ULW 3/1PF

