



T8

10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.


Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Buy American Compliant Products	Yes
EU RoHS compliant	Yes
Light Technical	
Color Code	835 [CCT of 3500K]
Beam Angle (Nom)	240 degree(s)
Luminous Flux	1,550 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	147.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	20K to 120K Hz
Input Frequency	20K to 120K Hz
Power Consumption	10.5 W
Lamp Current (Max)	350 mA
Lamp Current (Min)	90 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277, 347 V
UL Type	TLED_Type A; UL listed HF
Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	50 °C
Controls and Dimming	
Dimmable	Only with specific dimmers

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,200 mm
Bulb Shape	T8
Approval and Application	
Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance


Dimensional drawing

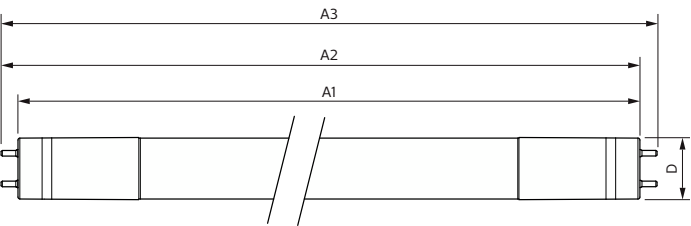


Product Data	
Order product name	10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1
Full product name	10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1
Order code	929003144504
Material Nr. (12NC)	929003144504
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677576776
Numerator - Packs per outer box	25
EAN/UPC - Case	50046677576771

Product	D1	D2	A1	A2	A3
10.5T8/COR/48-835/ IF15/G/DIM/BAA 25/1	25.7 mm	25.7 mm	1,198.2 mm	1,205.3 mm	1,212.4 mm

Photometric data

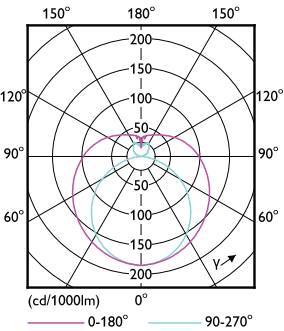


Light Distribution Diagram - 10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1

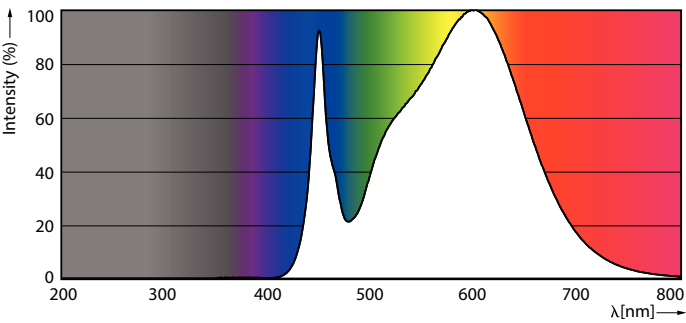


Spectral Power Distribution Colour - 10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1

Photometric data




General uniform lighting - 10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1


Lifetime

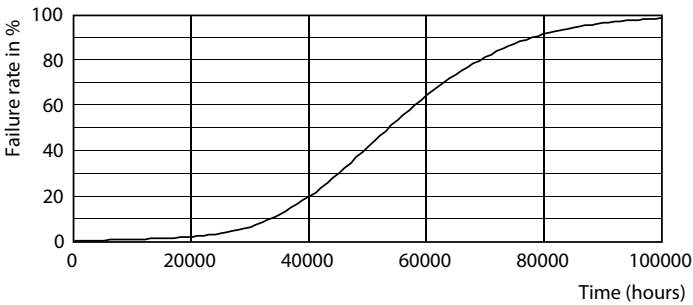


Life Expectancy Diagram - 10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1

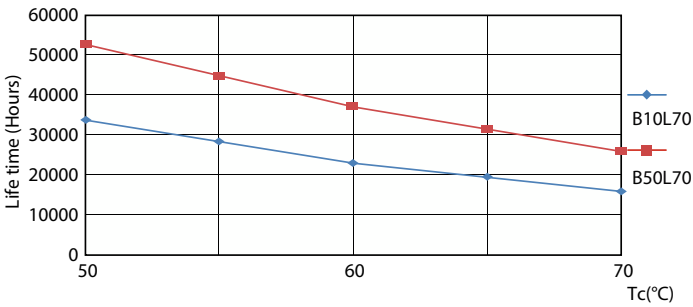

Life Expectancy Diagram - 10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1

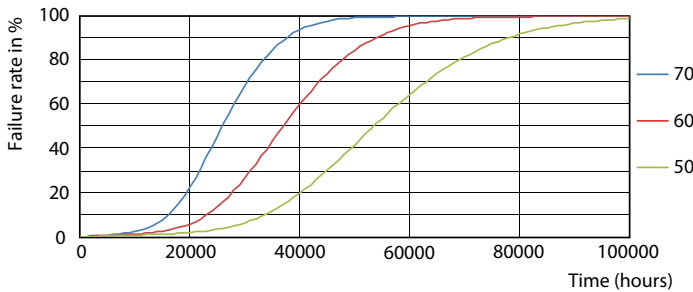


Life Expectancy Diagram - 10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1

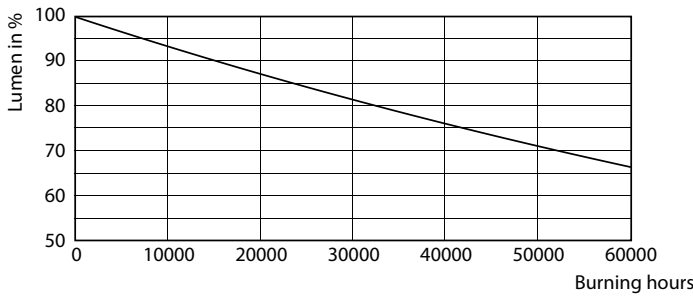

Lumen Maintenance Diagram - 10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1

Lifetime

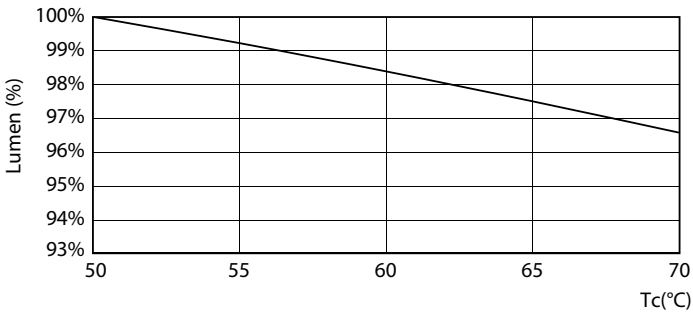

Lumen Maintenance Diagram - 10.5T8/COR/48-835/IF15/G/DIM/BAA 25/1

