



LED BR30

8.8BR30/CNG/830/FR/P/E26/DIM/120V 6/1CT

Contractor grade, LED, BR30, 65 W, E26 | Single Contact
Medium Screw, 3000 K, 650 lm, 15000 hour(s), Plastic

Philips BR30 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	110 degree(s)
Luminous Flux	650 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	73 lm/W
Color Consistency	6DSCM
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	60 Hz

Input Frequency	60 Hz
Power Consumption	8.8 W
Lamp Current (Nom)	90 mA
Wattage Equivalent	65 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	120 V
UL Type	Yes
Temperature	
T-Case Maximum (Nom)	158 °F
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic

LED BR30

Bulb Shape	BR30
UL Wet/ damp/ dry location	Damp location
Net Weight (Piece)	0.148 lb

Approval and Application

EU RoHS compliant	Yes
T20 compliant	No
Ambient temperature range	-4 °F to 113 °F

Application Conditions


can it be used in closed luminaires	Yes
-------------------------------------	-----

Product Data

Order product name	8.8BR30/CNG/830/FR/P/E26/DIM/120V 6/1CT
--------------------	--



Full product name	8.8BR30/CNG/830/FR/P/E26/DIM/120V 6/1CT
Order code	583591
Material Nr. (12NC)	929003619904
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677583590
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677583595

Dimensional drawing



Product	D	C
8.8BR30/CNG/830/FR/P/E26/DIM/120V 6/1CT	3-3/4 inch	5-1/8 inch

Photometric data

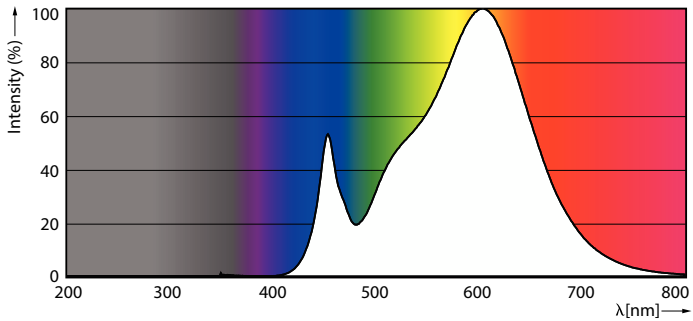


General uniform lighting - 8.8BR30/CNG/830/FR/P/E26/DIM/120V 6/1CT

Spectral Power Distribution Colour - 8.8BR30/CNG/830/FR/P/E26/DIM/120V 6/1CT


LED BR30

Photometric data




Light Distribution Diagram - 8.8BR30/CNG/830/FR/P/E26/DIM/120V 6/1CT

Lifetime

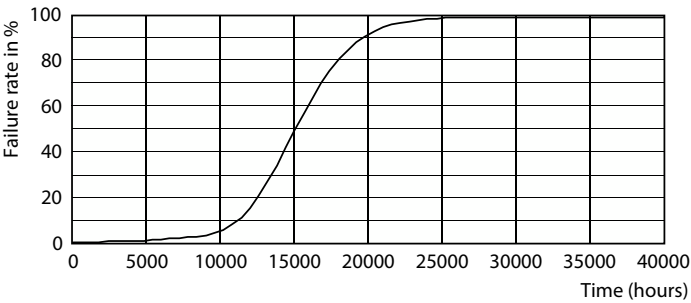

Life Expectancy Diagram

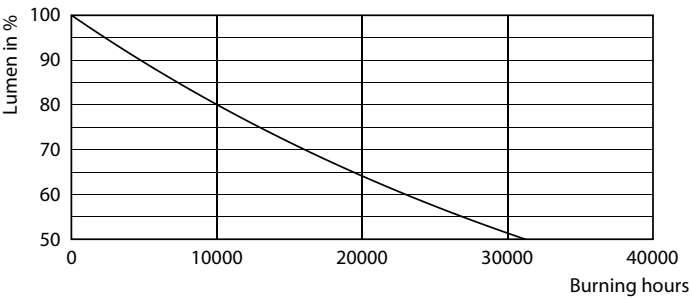

Lumen Maintenance Diagram - 8.8BR30/CNG/830/FR/P/E26/DIM/120V 6/1CT

