



MasterClass MainsFit (UL Type-B) T8

11.5T8/MAS/48-850/MF21/G/DIM UE 25/1

MasterClass, LED, T8, 11.5 W, 5000 K, 2100 lm, 50000 hour(s)

The MasterClass MainsFit (UL Type B) T8 lamps are designed to be the perfect retrofit solution to move from traditional fluorescent lamps to energy saving LEDs. This ballast bypass lamp has everything needed built into the lamp with proven energy savings, long life (70k hours), surge suppression and industry leading safety features. All lamps in the MasterClass MainsFit family are double-ended to help simplify the installation. In addition, all lamps meet the Philips standards for light quality so that end users will be in a comfortable environment regardless of the MasterClass MainsFit lamp type.

Product data

General Information	
Cap-Base	G13
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED

Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	220 degree(s)
Luminous Flux	2,100 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	182 lm/W
Color Consistency	<5

Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Sustainability Data	
Product non-virgin material ratio	0 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	11.5 W
Lamp Current (Max)	130 mA
Lamp Current (Min)	48 mA
Wattage Equivalent	32 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s

MasterClass MainsFit (UL Type-B) T8

Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
UL Type	UL Type B

Temperature

T-Case Maximum (Nom)	50 °C
----------------------	-------

Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,200 mm
Bulb Shape	T8
Net Weight (Piece)	0.200 kg

Approval and Application

Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance

EU RoHS compliant	Yes
Ambient temperature range	-20 to +45 °C
Post-consumer recycled plastic material ratio	0 %


Application Conditions

can it be used in closed luminaires	Yes
-------------------------------------	-----

Product Data


Order product name	11.5T8/MAS/48-850/MF21/G/DIM UE 25/1
Full product name	11.5T8/MAS/48-850/MF21/G/DIM UE 25/1
Order code	929004283004
Material Nr. (12NC)	929004283004
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677607470
Numerator - Packs per outer box	25
EAN/UPC - Case	50046677607475

Dimensional drawing

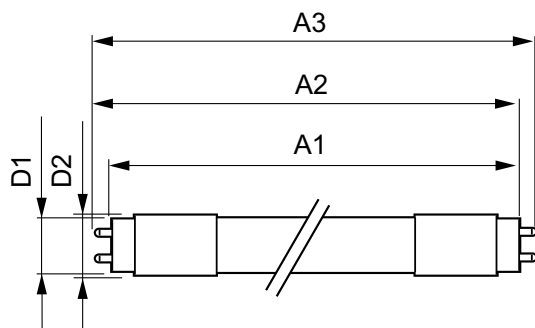


Product	D1	D2	A1	A2	A3
11.5T8/MAS/48-850/ MF21/G/DIM UE 25/1	25.7 mm	27.9 mm	1,199.4 mm	1,206.5 mm	1,213.6 mm

Photometric data




General uniform lighting - 11.5T8/MAS/48-850/MF21/G/DIM UE 25/1

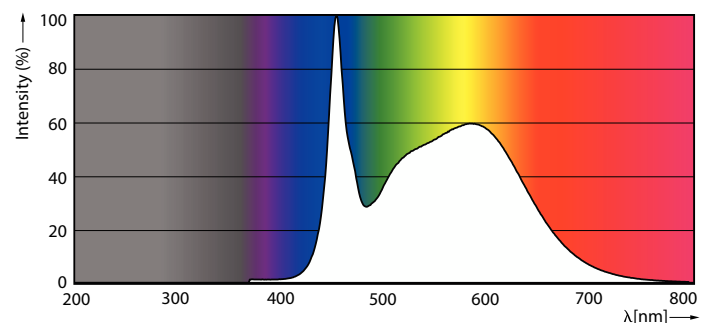

Spectral Power Distribution Colour - 11.5T8/MAS/48-850/MF21/G/DIM UE
25/1


MasterClass MainsFit (UL Type-B) T8

Photometric data




Light Distribution Diagram - 11.5T8/MAS/48-850/MF21/G/DIM UE 25/1


Lifetime

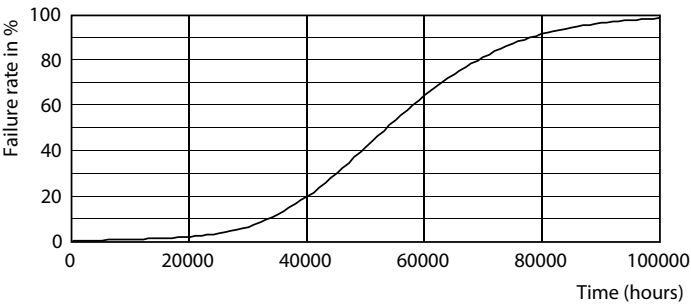


Life Expectancy Diagram

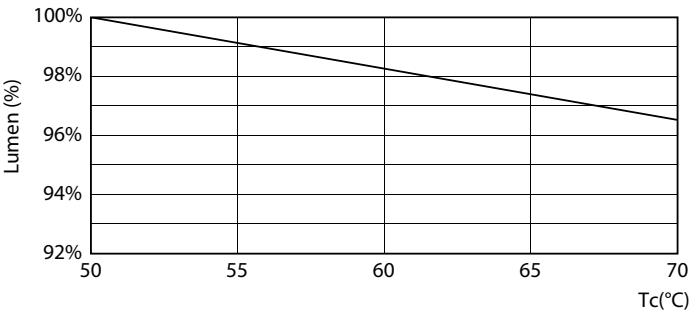

Lumen Maintenance Diagram - 11.5T8/MAS/48-850/MF21/G/DIM UE 25/1

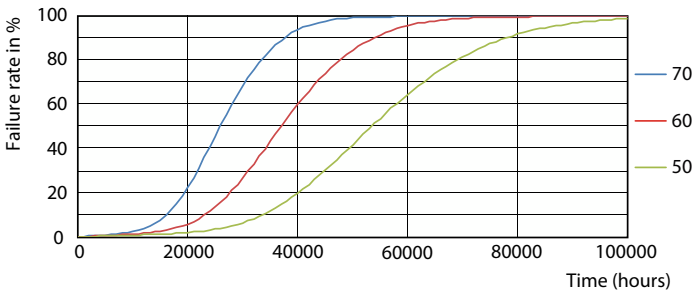


FailureRate

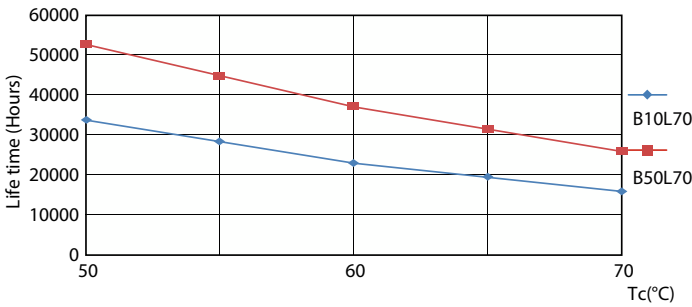

LifetimeVsTc

MasterClass MainsFit (UL Type-B) T8

Lifetime

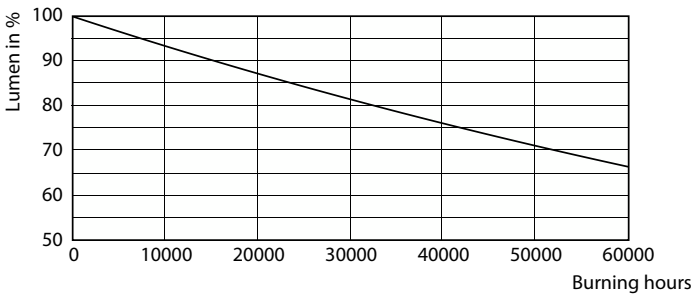

Lumen Maintenance Diagram - 11.5T8/MAS/48-850/MF21/G/DIM UE 25/1

