HUBBELL
Premise Wiring

Copper Solutions, Patch Cords, Ascent, Cat6A, Slim, 20′ Length, Pink

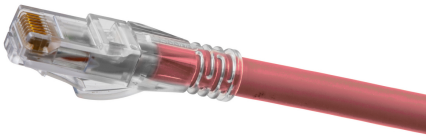

By Hubbell Premise Wiring
Catalog # HC6APK20

Copper Solutions, Patch Cords, Ascent, Cat6A, Slim, 20′ Length, Pink

Features

- Third Party Verified Category 6A Component
- Plug Optimized For High Density Switch Ports
- 10-Gigabit Application Assurance
- Qualified to 150% of 802.3bt PoE Current Level

Specifications

Industry Standard(s)	• ANSI/TIA/EIA-568-C.2 Category 6A Component • ISO 11801/60603-7-41 Category 6A Component
EU RoHS Indicator	Yes

Conductor

Conductor Type	Copper
Conductor Stranding	Stranded
Number Of Conductors	8-Conductor
Wire Size	#24 AWG

Current

Voltage Rating	300V AC kV

Dimensions

Length	20 ft
Outside Diameter	0.218

General

Specifications	• Conductor - 26AWG UTP • Contact Plating - 50 micro-inch Gold with 100 micro-inch under plating • Jacket - Dual Layer Flame-Retardant PVC - CM Rated • Plug Body - Polycarbonate UL 94V-0 • Plug Boot - Polycarbonate UL 94V-0
Color	Pink
UPC	662620230627
Type	Standard
Plug Type	RJ45
Material - Jacket	Flame Redardant PVC
Material - Insulation	Flame Redardant PVC

Logistics

Carton Quantity	15

Operational

Temperature Rating	Per TIA

Product Assets

Catalog [English]
Catalog Page [English]
Catalog Page [English]

© 2026 Hubbell Incorporated. All rights reserved