HUBBELL
Premise Wiring

Patch Cord, NextSpeed, Cat6, Slim, Orange, 3′ Length

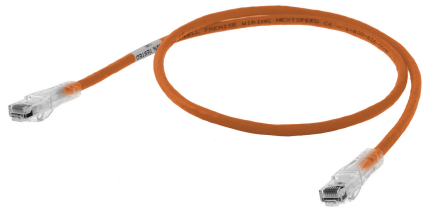

By Hubbell Premise Wiring
Catalog # HC6OR03

Patch Cord, NextSpeed, Cat6, Slim, Orange, 3′ Length

Features

- Third Party Verified Category 6 Component
- Plug Optimized For High Density Switch Ports
- TSB-155 10 Gig Support
- Qualified to 150% of 802.3bt PoE Current Level

Specifications

EU RoHS Indicator	Yes
Industry Standard(s)	• ANSI/TIA/EIA-568-C.2 Category 6 Component • ISO 11801/60603-7-41 Category 6 Component

Conductor

Number Of Conductors	8-Conductor
Wire Size	#24 AWG
Conductor Type	Copper
Conductor Stranding	Stranded

Current

Voltage Rating	300V AC kV

Dimensions

Length	3 ft
Outside Diameter	0.218

General

Color	Orange
Plug Type	RJ45
Specifications	• Conductor - 24AWG UTP • Contact Plating - 50 micro-inch Gold with 100 micro-inch under plating • Jacket - Flame-Retardant PVC-CM Rated • OD - 0.224 in. • Plug Body - Plycarbonate UL 94V-0 • Plug Boot - Polycarbonate UL 94V-0
UPC	662620232645
Type	Standard
Material - Jacket	Flame Redardant PVC
Material - Insulation	Flame Redardant PVC

Logistics

Pallet Quantity	3510
Carton Quantity	65

Operational

Temperature Rating	Per TIA

Product Assets

Catalog [English]
Catalog Page [English]
Catalog Page [English]

© 2026 Hubbell Incorporated. All rights reserved