

HUBBELL

Premise Wiring

HFCD1 Series Indoor Tight Buffer Distribution, 12 strand, Plenum, OM4, MM, Aqua Jacket

By Hubbell Premise Wiring
Catalog # [HFCD1012P4](#)

HFCD1 Series Indoor Tight Buffer Distribution, 12 strand, Plenum, OM4, MM , Aqua Jacket

Features

- Multimode Bend-Insensitive Optical Fiber
- E-Z Strip Buffer For Contractor-Friendly Termination
- Compact Cable Diameter Reduces Pathway Congestion
- Premium Fiber For Enhanced Optical Performance

Application

Data Transmission

Specifications

Industry Standard(s)	• ANSI/ICEA S-83-596 • NFPA-262/UL910/CSA FT-6 • Telcordia GR-409 • TIA-568.3-D
----------------------	---

Conductor


Number Of Fibers	12
Fiber Size	OM4
Fiber Type	OM4, MM

Current

Wavelength	850/1300 Nanometers
------------	---------------------

General

Color	Aqua
-------	------

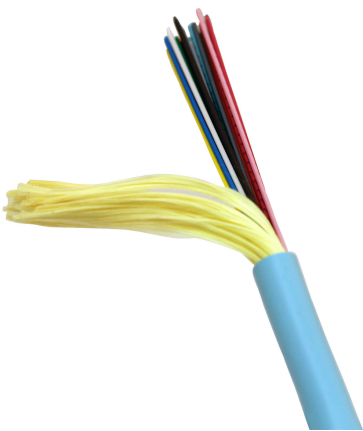

Sub Brand
Cable Rating
Specifications

Fiber Optics
Plenum

- Armor - None
- Cable Diameter in (mm) - 0.25 (6.3)
- Cable Weight (lb/kft) - 35
- Construction - Single Unit, Aramid Strength Member
- Fiber Coating - 900 Micron PVC Tight Buffer

662620332000
Cable
PVC

Logistics

Carton Quantity	1
-----------------	---

Operational

Bandwidth	4000 bps
Temperature Rating	0 Degrees C to 70 Degrees C
Attenuation	3.5/1.5 Db per Kilometer

Product Assets

[Catalog \[English\]](#)
[Catalog Page \[English\]](#)
[Catalog Page \[English\]](#)