


HUBBELL

Premise Wiring

HFCD1 Series Indoor Tight Buffer Distribution, 24 strand, Riser, OS2, SM, Yellow Jacket

By Hubbell Premise Wiring
Catalog # [HFCD1024RS](#)

HFCD1 Series Indoor Tight Buffer Distribution, 24 strand, Riser, OS2, SM , Yellow Jacket

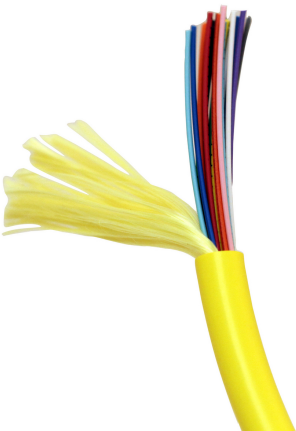

Features

- Singlemode Bend-Insensitive Optical Fiber
- E-Z Strip Buffer For Contractor-Friendly Termination
- Compact Cable Diameter Reduces Pathway Congestion
- Premium Fiber For Enhanced Optical Performance

Application

Data Transmission

Specifications

Industry Standard(s)	• ANSI/ICEA S-83-596 • NFPA-262/UL910/CSA FT-4 • Telcordia GR-409 • TIA-568.3-D
----------------------	---

Conductor

Number Of Fibers	24
Fiber Size	OS2
Fiber Type	OS2, SM

Current

Wavelength	1310/1550 Nanometers
------------	----------------------

General

Specifications

- Armor - None
- Cable Diameter in (mm) - 0.32 (8.1)
- Cable Weight (lb/kft) - 43
- Construction - Single Unit, Aramid Strength Member
- Fiber Coating - 900 Micron PVC Tight Buffer

Color	Yellow
UPC	662620333670
Type	Cable
Sub Brand	Fiber Optics
Material - Jacket	PVC
Cable Rating	Riser

Operational

Attenuation	0.5/0.4 Db per Kilometer
Temperature Rating	-20 Degrees C to 70 Degrees C

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)