



ITEM NO.		DESCRIPTION	QTY.	CATALOG NUMBER		DESCRIPTION
1		GROUND WIRE CONNECTOR	1	HGBKSA10		GROUND WIRE CONNECTOR

CABLE SIZES ACCOMMODATED					RECOMMENDED TIGHTENING TORQUE IN LBS
ALUM. TO ALUM., ALUM TO COPPER, COPPER TO COPPER CONDUCTORS			MAX RUN TO MAX TAP	MIN RUN TO MIN TAP	MAX RUN TO MIN TAP
1/0 STR (.373)	1/0 STR (.373)	#2STR COMPACT(.268)	#8 SDL (.129)	1/0 STR (.373)	#8 SDL (.129)
					385 [43.5 N M]

METRIC CABLE SIZES ACCOMMODATED					
ALUM. TO ALUM., ALUM. TO COPPER, COPPER TO COPPER CONDUCTORS					
MAX RUN TO MAX TAP		MIN RUN TO MIN TAP		MAX RUN TO MIN TAP	
35mm ² STR [7.8]	35mm ² STR [7.8]	35mm ² STR [7.6]	10mm ² STR [4.1]	4mm ² STR [2.6]	10mm ² SDL [3.6]

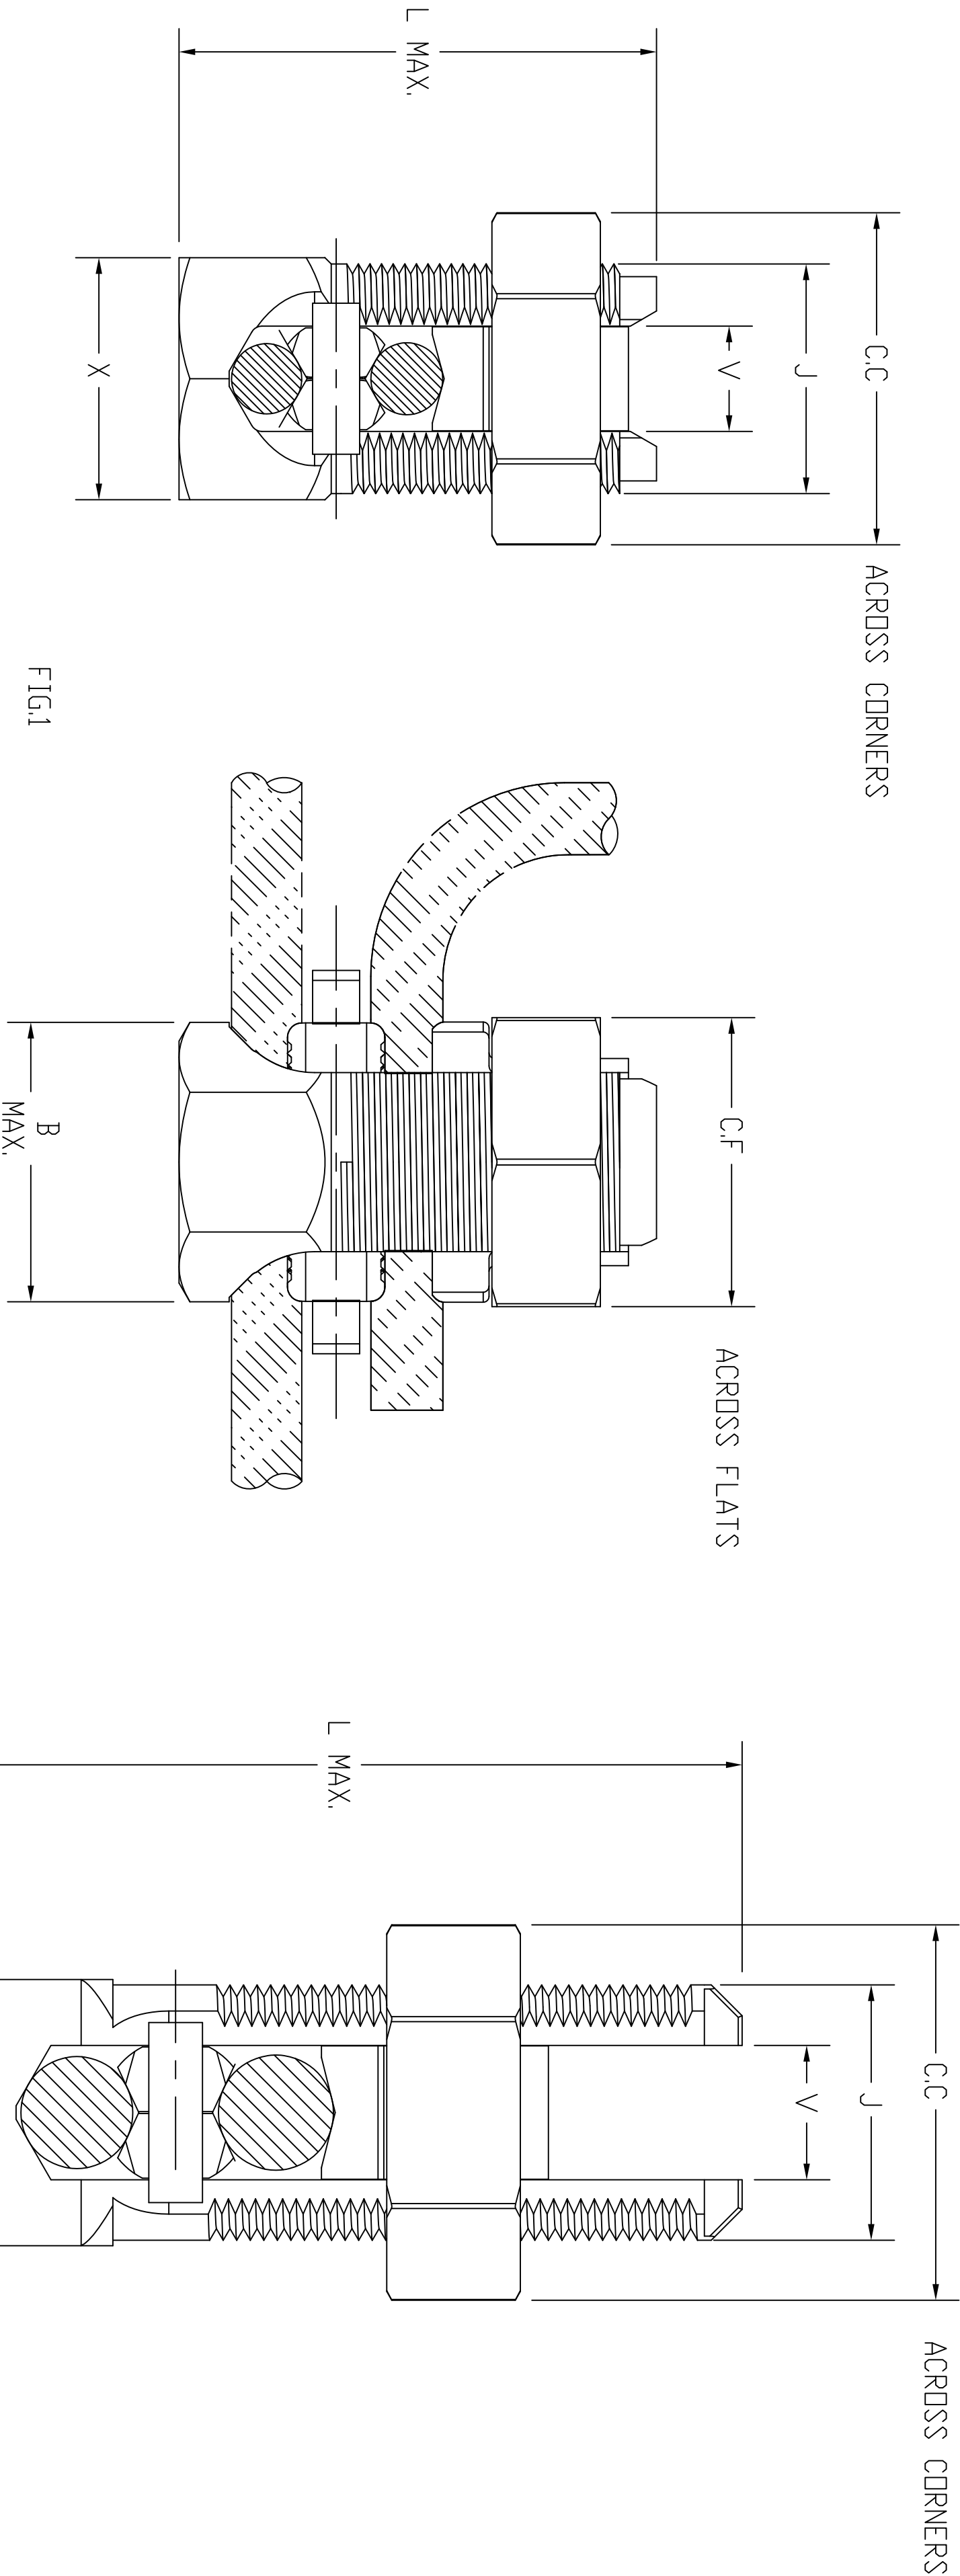

VIEW OF TYPICAL SPACER
USED WITH TYPICAL
PRESSURE BAR AND ASSEMBLY

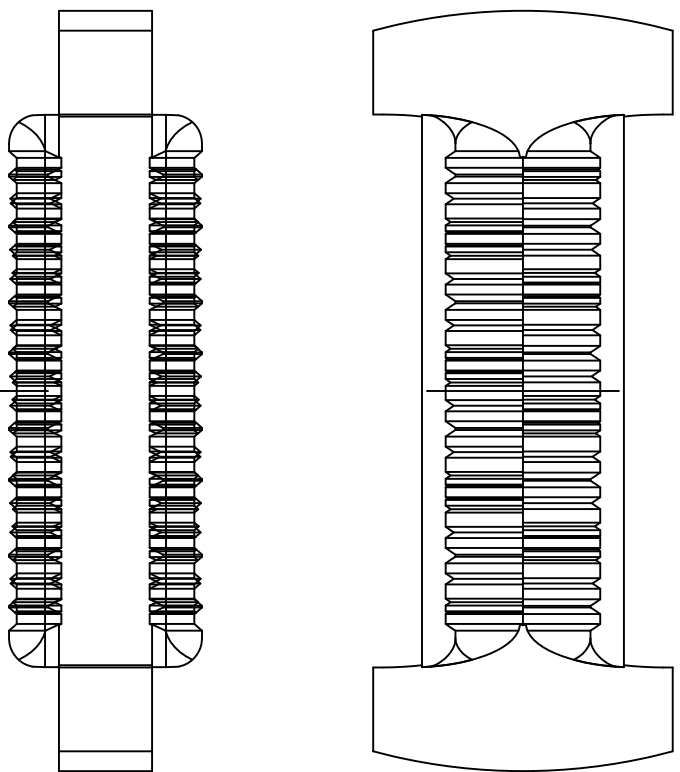

- NOTES:
1. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 2. UL 486B LISTED.
 3. CSA C222 ND 65 LISTED.

REV.	ECN	DATE	DESCRIPTION	CHG BY	APPD BY
1	17862	3/5/12	INITIAL RELEASE	CG	

Created on AUTOCAD		DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM).		PROJECT REFERENCE: 2011-041		HUBBELL HUBBELL INCORPORATED (Delaware) 14 Lord's Hill Road, Stonington, Connecticut 06378	
TOLERANCES X = ±.03 (B) XX = ±.02 (A) XXX = .01 (C) ANGLE TOU ±1°		MATERIAL: ALUMINUM ALLOY, TIN PLATED		DRAWN BY: C. GRIBBLE 3/5/12		TITLE: GROUND WIRE CONNECTOR 1/0 TO 8 AWG	
IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE INFORMATION CONTAINED HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION		CHECKED BY:		APPROVED BY:		SIZE DRAWING NO. D HWS14027C	
SCALE: 1/1		SHEET 1 OF 1		REV. 1			