


M-11000	2
---------	---

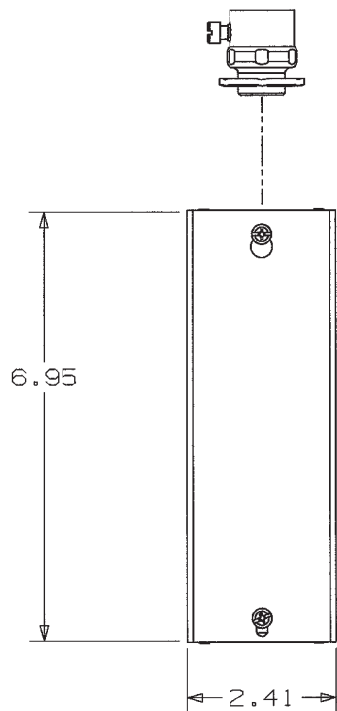


1" KNOCKOUT

3/4" KNOCKOUT, 3 SIDES

- 1/2" KNOCKOUT, 3 SIDES

- GROUND SCREW

3/4" KNOCKOUT



(1) 3/4" AND (1) 1" CONDUIT
SUPPLIED LOOSE INSIDE JUNCTION BOX

NOTES :

- NOTES:
1. BOX VOLUME: 27 IN³/442 CM³
 2. PART IS UL/CUL LISTED

CODE 74545

LIST OF PARTS

[illegible]

2	UPDATED KNOCKOUT DETAILS PER DCN 14930	SM	3/26/08
1	RELEASED PER DCN 14521		3/26/08
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE	JUNCTION BOX ASSY SYSTEM ONE
-------	---------------------------------

TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS $\pm 1/64$ DECIMALS $\pm .005$ ANGLES $\pm 2^\circ$	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
	DF. BY MSS	APP. BY <i>SM</i>
	TF. BY	SCALE 1:1
	CHK'D BY	DATE 3/26/08

DIMENSION SHEET FOR CAT. NO.

SIFRPTJB

REPAIRABLE ☐

NON-REPAIRABLE ☒


0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99
---	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

M-11000

2	3
---	---

M-12337

1

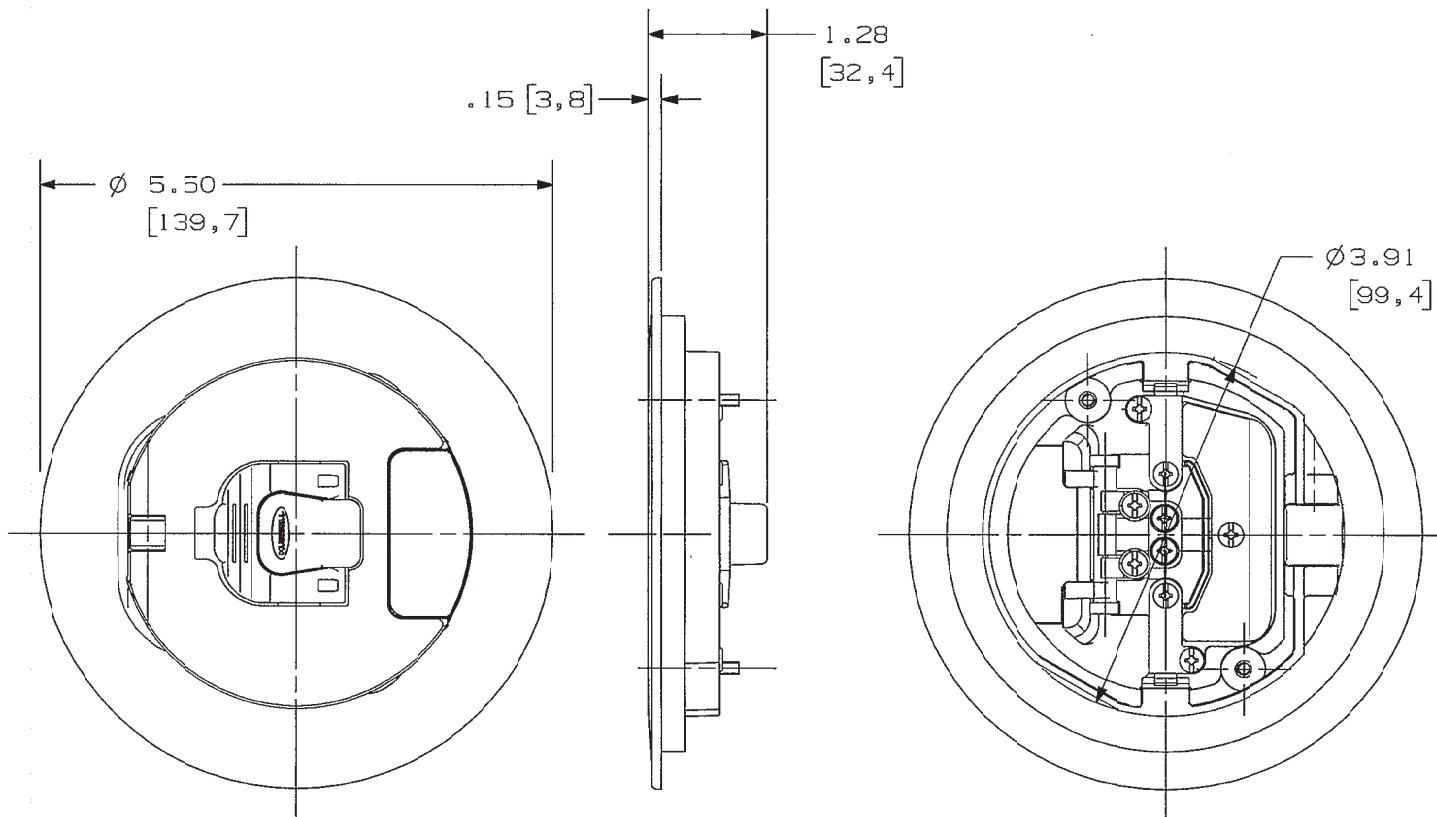

CATALOG NUMBER	FINISH
S1R4CVRBLK	BLACK POWDER COAT
S1R4CVRGRY	GRAY POWDER COAT
S1R4CVRBRS	BRASS PLATED
S1R4CVRNKL	NICKEL PLATED
S1R4CVRBRZ	BRONZE PLATED
S1R4CVRALU	BRUSHED ALUMINUM

NOTES:

- 1) ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
- 2) SUPPLIED WITH (2) MOUNTING SCREWS.
- 3) COVER OPENS 180 DEGREES.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FLANGE RING	ALUMINUM	SEE TABLE
MAIN DOOR	ALUMINUM	SEE TABLE
ACCESS DOOR	ALUMINUM	SEE TABLE
HANDLE	ALUMINUM	SEE TABLE
HANDLE BEARING BLOCK	ALUMINUM	SEE TABLE
LINK	ALUMINUM	SEE TABLE
SLIDERS	ALUMINUM	SEE TABLE
DOOR GASKETS	FOAM GASKET	BLACK
MOUNTING SCREWS	STEEL	ZINC PLATE
PAN HD. SCREWS	STEEL	ZINC PLATE
FIRE BARRIER	FIRE BAR. MATL.	NATURAL
SPRINGS	STEEL	ZINC PLATE
DOWEL PINS	STEEL	ZINC PLATE
SLIDER RETAINERS	STEEL	ZINC PLATE
RATCHET PLATE	STEEL	ZINC PLATE
RETAINER PLATE	STEEL	ZINC PLATE
FIRE BARRIER COVER	STEEL	ZINC PLATE

1	RELEASED PER DCN19806	2	5/1/13
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE COVER, FIRE RATED
POKE THROUGH,
4 INCH DIAMETER

TOLERANCES UNLESS
OTHERWISE SPECIFIED

.XX = ± .01
.XXX = ± .005
ANGLES = ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY SRE	APP. BY <i>[Signature]</i>
TR. BY	SCALE NONE
CHK. BY <i>[Signature]</i>	DATE 9/11/12

DIMENSION SHEET FOR CAT. NO.

SEE TABLE


REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-12337

1

M-12338 2

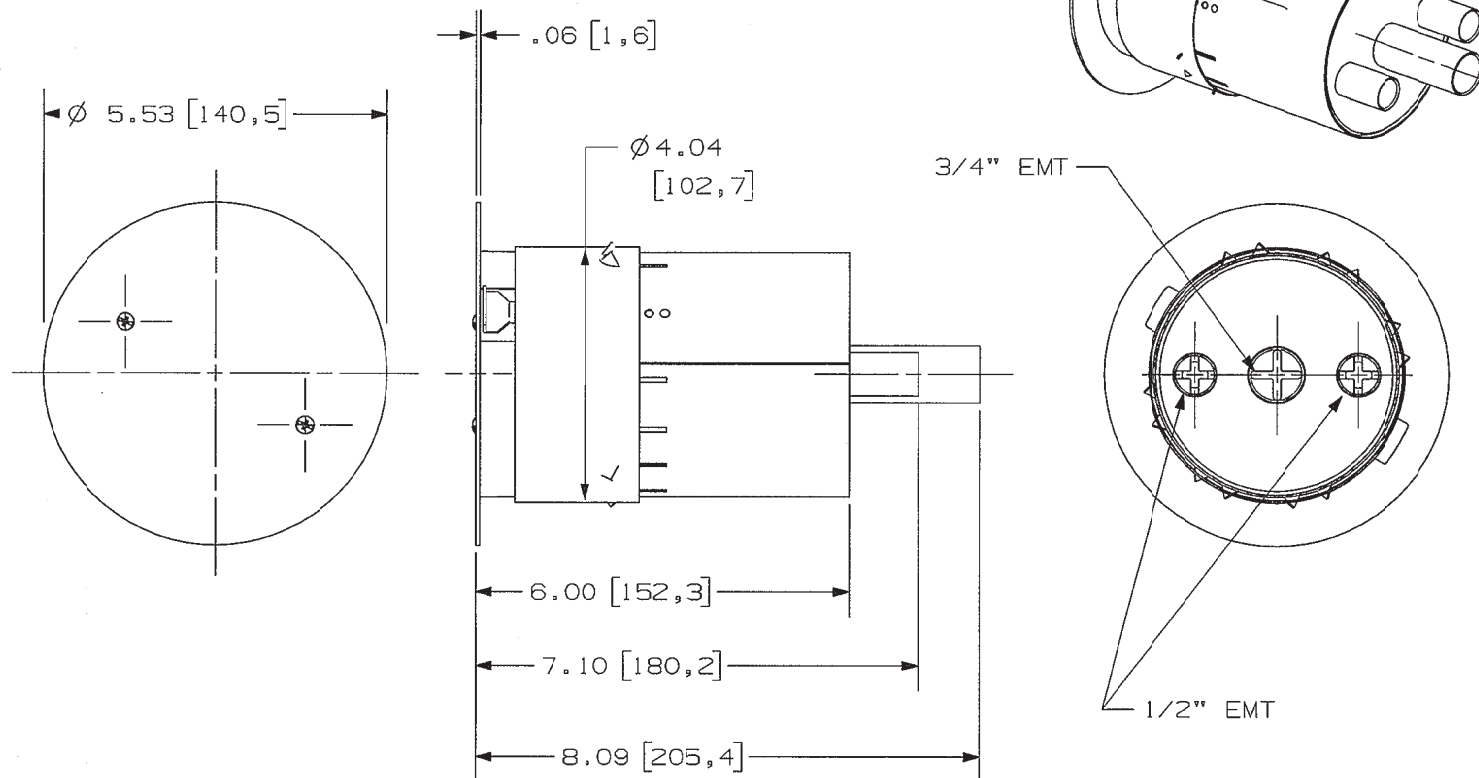

NOTES:

- 1) ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
- 2) JUNCTION BOX SIFRPTJB (NOT SHOWN) IS INCLUDED WITH FLOOR FITTING CATALOG NUMBER SIR4PTFIT. SEE DWG. M-11000 FOR DIMENSIONS OF JUNCTION BOX. JUNCTION BOX SHIPPED LOOSELY WITH UNIT.
- 3) FOR USE IN A 4.00" - 4.12" [10,2-10,5 cm] DIAMETER HOLE. MINIMUM THICKNESS OF CONCRETE 2.25" [5,7 cm].

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
CAN WELDMENT	STEEL	ZINC PLATE
INSTALLATION PLATE	STEEL	ZINC PLATE
SUB-PLATE MTG. PLATE	STEEL	ZINC PLATE
STANDOFFS	STNLS. STEEL	NONE
FIRE BARRIER, UPPER	FIRE BAR. MATL.	NATURAL
FIRE BARRIER, LOWER	FIRE BAR. MATL.	NATURAL
SPACER	FIRE BAR. MATL.	BLACK
DIV. DERS	STEEL	ZINC PLATE
WASHERS	FIBER	RED
MOUNTING SCREWS	STEEL	ZINC PLATE
TAPE	PLASTIC	YELL./BLK.
BOTTOM COVER	STEEL	ZINC PLATE

2	DIM .06 [1,6] WAS .16 [4,0] DCN20139 AD	AD	11/14/13
1	RELEASED PER DCN19806		5/1/13
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

SERVICE FITTING,
FIRE RATED FOLE THROUGH,
4 INCH DIAMETER

TOLERANCES UNLESS
OTHERWISE SPECIFIED

.XX = ±.01
.XXX = ±.005
ANGLES = ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY SRE	APP. BY <i>AD</i>
TR. BY	SCALE 1:2
CHK. BY	DATE 9/11/12

DIMENSION SHEET FOR CAT. NO.

SIR4PTFIT

REPAIRABLE ☐NON-REPAIRABLE ☒

B

M-12338

2