

CATALOG NO.

DESCRIPTION

CABLE TYPE

CABLE COLOR

POLISH(A)

CONN. COLOR (A)

BOOT COLOR (A)

POLISH (B)

CONN. COLOR (B)

BOOT COLOR (B)

SFRCSTSTSxxSMFIBER, P-CORD, SM, RISER, ST-ST, SIMP, xx* METER9/125 OS2YELLOWUPCMETALLICBLUEUPCMETALLICBLUE

xx* MEANS AVAILABLE IN THE FOLLOWING LENGTHS:

1 METER

2 METER

3 METER

4 METER

5 METER

10 METER

LENGTH +10%/-0%

END A

END B

DUST CAP SHIPPED INSTALLED

CERAMIC FERRULE PRE-RADIUSED MACHINE POLISHED TWO-PART HEAT CURED EPOXY TERMINATION

ST CONNECTOR, METALLIC NUT AND BODY (A) POLISH: SEE TABULATION

2.0mm STRAIN RELIEF BOOT (A) COLOR: SEE TABULATION

OFNR 2.0mm JACKETED KEVLAR REINFORCED ZIP CABLE WITH 900µm BUFFERED FIBER COLOR/TYPE: SEE TABULATION

2.0mm STRAIN RELIEF BOOT (B) COLOR: SEE TABULATION

ST CONNECTOR METALLIC NUT AND BODY (B) POLISH: SEE TABULATION

NOTES:

1. CONNECTOR OPTICAL, MECHANICAL AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA-568-C.3 SPECIFICATIONS.

2. CONNECTOR HOUSING IS INJECTION MOLDED ENGINEERING PLASTIC RESIN.

3. OPTICAL INSERTION LOSS AND RETURN LOSS TEST DATE INCLUDED IN EACH BAGGED PATCH CORD.

4. CABLE MARKINGS TO IDENTIFY EACH END (A OR B).

5. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

Created on AUTOCAD

DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). TOLERANCES .XX = ±.01 (.25) .XXX = ±.005 (.127) .XXXX = ±.0025 (.0635) ANGLE TOL ±1°

IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION


PROJECT REFERENCE: NPD-00160

MATERIAL:

DRAWN BY: J.RUOT-JACKSON 9/20/16

CHECKED BY:

APPROVED BY:

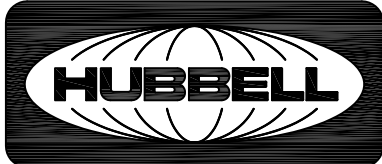

Hubbell Premise Wiring HUBBELL INCORPORATED (Delaware) 23 Clara Dr., Suite 103, Mystic, Connecticut 06355

TITLE: FIBER OPTIC PATCHCORD, OFNR, SINGLEMODE, ST-ST, SIMPLEX

SIZE C

DRAWING NO. HWS14698C

REV. 1

SCALE: 1/1 SHEET 1 OF 1

12149409/20/16INITIAL RELEASEJJRJMMA

REV.ECNDATEDESCRIPTIONCHG BYAPPD BY