

# HUBBELL

## Premise Wiring

### Keystone Snap Fit, Snap-Fit, SC, Simplex, Zircon Sleeves, Orange, White Housing

By Hubbell Premise Wiring  
Catalog # [SFSCSORW](#)

Fiber Optic Connectors, Snap-Fit, SC, Simplex, Zircon Sleeves, Orange, White Housing

#### Features

- Snap Fit
- White Housing
- Standard
- SC Simplex
- Orange Adapter

#### Application

Data Outlet

#### Specifications

|                          |                                                                                                                         |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Environmental Conditions | Indoor                                                                                                                  |
| Industry Standard(s)     | <ul style="list-style-type: none"><li>• Telcordia GR-326-CORE</li><li>• TIA-568-C.3</li><li>• TIA-604 FOCIS-3</li></ul> |


#### Conductor

|            |            |
|------------|------------|
| Fiber Size | 125 Micron |
|------------|------------|

#### Current

|                |            |
|----------------|------------|
| Insertion Loss | 0.75 dB    |
| Return Loss    | 55         |
| Connectivity   | Receptacle |

#### Dimensions

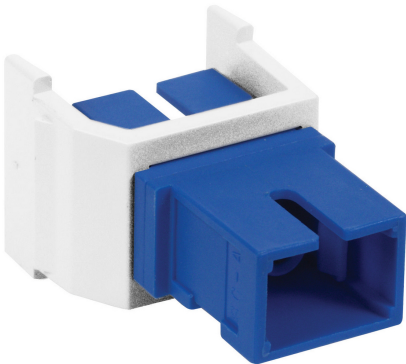

|              |             |
|--------------|-------------|
| Display Size | .58" X .76" |
| Size         | .58" X .76" |

#### General

|                              |                   |
|------------------------------|-------------------|
| Color                        | Orange            |
| Style                        | SC Simplex        |
| Enclosure Type               | Various           |
| Sub Brand                    | OptiChannel       |
| Mounting Type                | Standard          |
| Color - Housing              | White             |
| UPC                          | 662620241784      |
| Material - Mounting Hardware | Snap-In, Keystone |
| Item Type                    | SC Simplex        |
| Material                     | Ceramic           |

#### Logistics

|                 |    |
|-----------------|----|
| Carton Quantity | 25 |
|-----------------|----|

#### Operational

|                    |             |
|--------------------|-------------|
| Repeatability      | 0.1 dB      |
| Temperature Rating | 0C to 70C   |
| Service Life       | 500 matings |

#### Product Assets

[Catalog \[English\]](#)  
[Catalog Page \[English\]](#)