


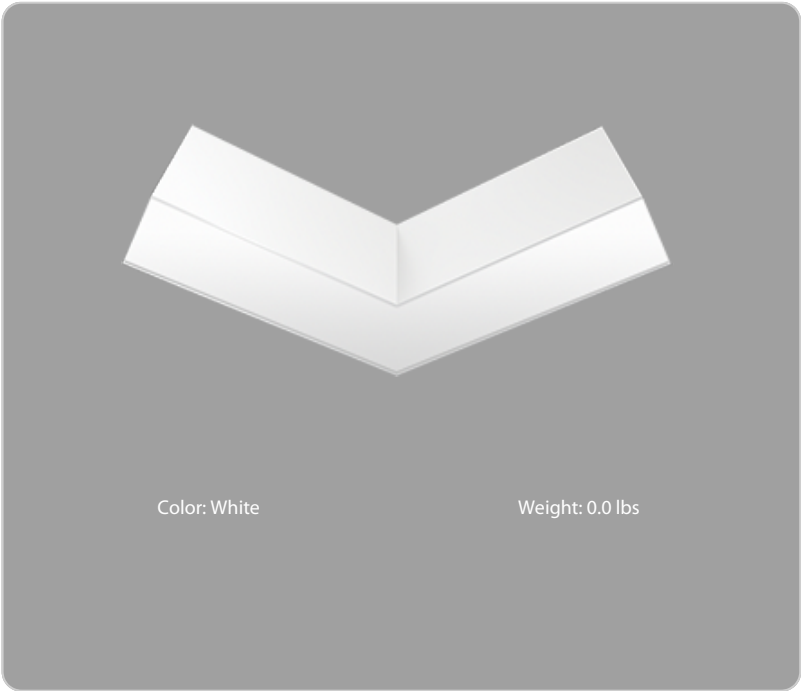

Project: 	Type:
Prepared By: 	Date:

Technical Specifications

Product Overview

Product Type:

Architectural Linear Light, SmartShift Ready

Performance

Description:

Extenders and mounting accessories for the BOA SmartShift Linear Light.

Electrical

Operating Temperature:

-4°F to 104°F (-20 to 40°C)

Emergency Operation:

Not for use as emergency lighting.

Installation

Mounting:

Suspended

Construction

Shape:

V

Finish:

White

Endcap Material:

Polycarbonate and aluminum

Enclosure Material:

Aluminum

Lens Finish:

Frosted

Lens:

Flat

Compliance

Environment:

Suitable for use indoors in dry and damp environments.

IC Rated:

No

Air Tight:

No

Energy Star Approved:

No

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

Certification Model Number:

BOAS-V

California Title 20 Compliant:

No

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:


Mercury and UV free. RoHS-compliant components.

Technical Specifications (continued)**FCC:**

Complies with Part 15 of the FCC Rules

Other**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

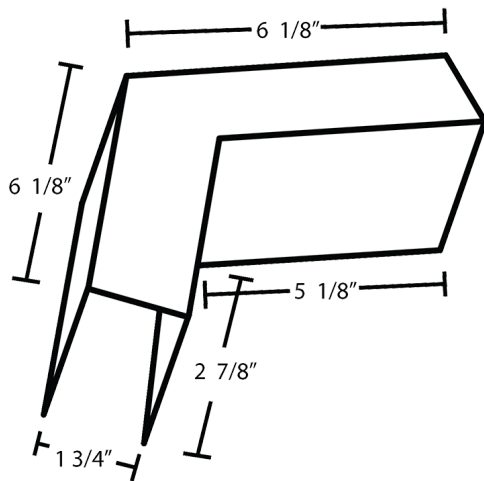Dimensions**Features**

- Available in 2', 3', 4', 8' with up/down light
- Suspended mount with optional flat or louver lens
- Wireless communication via Bluetooth Mesh with Lightcloud Blue
- SmartShift Ready for circadian and aesthetic lighting profiles
- 5-Year, No-Compromise Warranty