

Weight: 13.9 lbs

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

### LED Info

|             |                  |                |                 |
|-------------|------------------|----------------|-----------------|
| Type        | Constant Current | Watts          | 26W             |
| 120V        | 0.25A            | Color Temp     | 4000K (Neutral) |
| 208V        | 0.16A            | Color Accuracy | 85 CRI          |
| 240V        | 0.14A            | L70 Lifespan   | 100,000 Hours   |
| 277V        | 0.12A            | Lumens         | 1,319 lm        |
| Input Watts | 28.5W            | Efficacy       | 46.3 lm/W       |

## Compliance

Suitable for wet locations. Suitable for mounting within 4 ft (1.2m) of the ground.

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

100,000-Hour LED lifespan based on IESIm-80 results  
and TM-21 calculations

Equivalent 120W Incandescent, 75W Metal Halide or 42W CFL

The GN1LED26NST11A comes with the GOOSE1A arm

Precision die-cast aluminum housing, lens frame and mounting plate

### High-temperature Silicone

The minimum starting temperature is -40°F (-40°C)

11" Straight Shade offered

Formulated for high durability and long-lasting color

Mercury and UV free. RoHS-compliant components.

Single multi-chip, 26W high-output, long-life LED

LED color temperature is warranted to Shift no more than 200K in color temperature over a 5-year period

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Heavy-duty mounting arm with "O" ring seal and stainless steel screw

Constant Current, Class 2, 100-277V, 50/60 Hz, 0.48 A, THD≤20%, PF 97.9%.


## 4 kV

The design of the Gooseneck is protected by patents pending in US, Canada, China and Taiwan

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

12 - 14 weeks standard shipping.

Dimensions

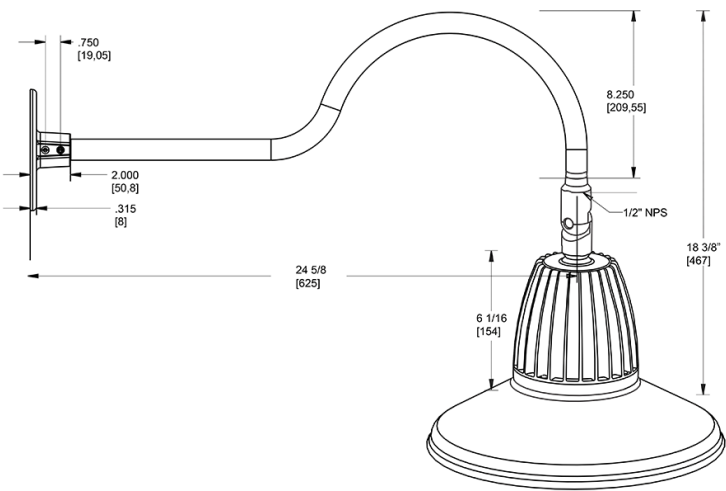

Features

- Adjustable 45° swivel joint
- Superior heat sink
- Die-cast aluminum housing
- 5-Year, No-Compromise Warranty

Ordering Matrix

| Family                                                                                                                                                                                                                                                                                                                                                                                                      | Wattage | Color Temp | Reflector | Shade | ShadeSize | Finish |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|-----------|-------|-----------|--------|
| GN1LED                                                                                                                                                                                                                                                                                                                                                                                                      | 26      | N          |           | ST    | 11        | A      |
| <div><div>26 = 26W<br/>13 = 13W</div><div>Y = 3000K Warm<br/>N = 4000K Neutral</div><div>Blank = Flood<br/>R = Rectangular<br/>S = Spot</div><div>ST = Straight Shade</div><div>11 = 11"<br/>Blank = 15"</div><div>R = Red<br/>I = Ivory<br/>BWN = Brown<br/>BL = Royal Blue<br/>LB = Light Blue<br/>YL = Yellow<br/>G = Hunter Green<br/>S = Silver<br/>A = Bronze<br/>W = White<br/>B = Black</div></div> |         |            |           |       |           |        |