



\_\_\_\_\_

|                |               |
|----------------|---------------|
| Watts          | 26W           |
| Color Temp     | 3000K (Warm)  |
| Color Accuracy | 72 CRI        |
| L70 Lifespan   | 100,000 Hours |
| Lumens         | 3,078 lm      |
| Efficacy       | 116.2 lm/W    |

## Page 1 of 3

## Technical Specifications (continued)

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

## Installation

### Mounting:

Pendant provided by others. Threads are 1/2 inch NPS. Stem insertion depth not to exceed 5/8 inch. Lock screw provided on fixture.

## Other

### Patents:

The design of GPLED26 is protected by patents pending in US, Canada, China, Taiwan and Mexico

### 5-Year, No-Compromise Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Optical

### BUG Rating:

B2 U3 G1

## Dimensions

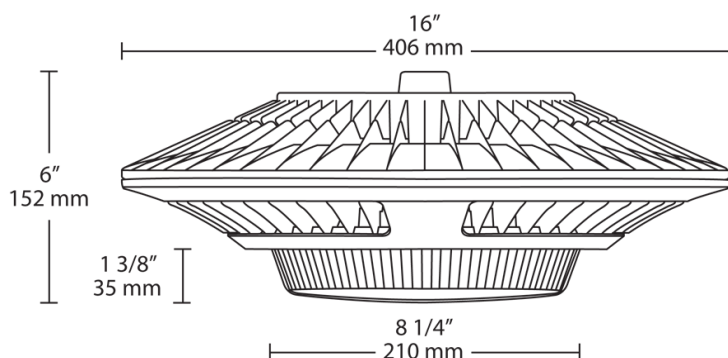

## Features

- Low-profile design Ideal for Parking Garages
- 78W Replaces 250W MH Luminaires
- 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Up to 25% Reduction in Fixture Count
- Lock screw provided for pendant mount

Ordering Matrix

| Family   | Wattage            | Color Temp         | Back Box       | Finish                          | Driver |
|----------|--------------------|--------------------|----------------|---------------------------------|--------|
| GPLED    | 26                 | Y                  |                |                                 | /D10   |
| 52 = 52W | Blank = 5000K Cool | Blank = No Backbox | Blank = Bronze | Blank = No Option               |        |
| 78 = 78W | N = 4000K Neutral  | BB = Back Box      | W = White      | /D10 = 0-10V Dimming            |        |
| 26 = 26W | Y = 3000K Warm     |                    |                | /480 = 480V                     |        |
|          |                    |                    |                | /480/D10 = 480V w/0-10V Dimming |        |
|          |                    |                    |                | /BL = Bi-Level                  |        |