



RAB®




Floodlight solutions for hazardous environments. HAZFFLED—Class I, Div 2 lighting.

Built tough.

Designed to perform in areas with hazardous vapor and gases, the HAZFFLED is certified for Class I, Division 2, Groups A, B, C, D and has a temperature rating of T4A or higher, depending on the model.

Ideal for use in:

- Petroleum refineries
- Fuel servicing areas
- Utility gas plants
- Dry cleaning plants
- Aircraft hangars

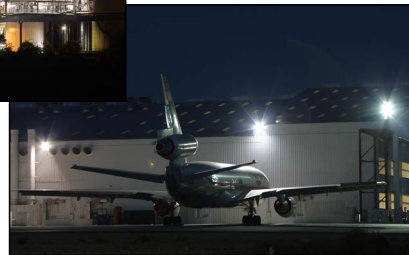



50,000-HOUR LED
LIFESPAN



AVAILABLE FOR
150W MODEL



IP66



5-YEAR,
NO-COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

Various wattages keep your options open.

The HAZFFLED is available in five wattages—everything from 30W to 200W—for use in countless applications on a single site, and its wide, 7H x 6V NEMA spread is versatile enough for multi-purpose use. 5000K color temperature maximizes visibility to promote a safer environment.




30W & 60W

100W & 150W

200W

Accessories.

Wire Guards

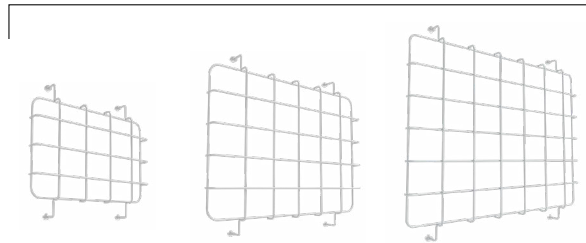


HAZFF-S-WG

HAZFF-M-WG

HAZFF-L-WG


Hoods

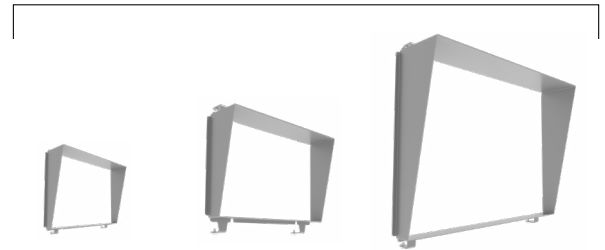

HAZFF-S-H

HAZFF-M-H

HAZFF-L-H



Adjustable Arm
HAZFF-ADJ-ARM*
*For all model sizes.

Ordering Matrix

Product Family	Wattage		Mount		Color Temp		NEMA Type		Finish		Voltage	
HAZFFLED												
	30	30W	Blank	Yoke	Blank	5000K	Blank	7Hx6V	Blank	Gray	Blank	120-277V, 0-10V Dimming
	60	60W	SF	Slipfitter							/480	480V, 0-10V Dimming*
	100	100W										
	150	150W										
	200	200W										

*480V available only for 150W