

UPC: 192552015691
Weight: 0.1 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.07A
208V	N/A
240V	N/A
277V	N/A
Input Watts	6W

LED Info

Watts	6W
Color Temp	2200K-4500K
Color Accuracy	90 CRI
L70 Lifespan	15,000 Hours
Lumens	800 lm
Efficacy	133

Technical Specifications

Performance

Product Type:
Bluetooth-Enabled Filaments

Input Wattage:
6W

Lumens:
800lm

Efficacy:
133lm/W

Lifespan:
15,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

LED Characteristics

Color Accuracy (CRI):
>90 CRI

Beam Angle:
360°

Color Temperature:
2200K-4500K

Electrical

Power Factor:
0.7

Dimming:

Dimmable via Lightcloud Blue mobile app

Flicker:

<30%

Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

Input Voltage:

120V

Operating Frequency:

60Hz

Construction

Material:
Glass

Shape:
ST19

Installation

Base Type:
E26 Medium Base

Compliance

UL Listed:
Suitable for wet locations

Fixture Rating:

Enclosed

Other


3-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	8	11.38	5.79	6
PALLET	768	46.3	35.91	26.4

Dimension

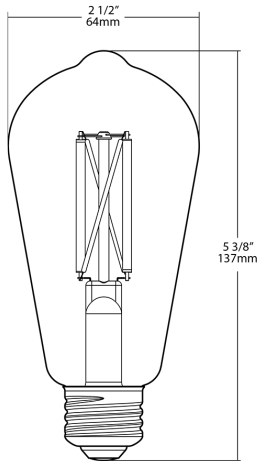

Features

- Direct Connect to the Lightcloud Blue mobile app via Bluetooth, no Gateway or Hub required
- Use mobile device to configure features for On/Off Control, Dim Level, Color Temperature, Schedules, Scenes, SmartShift and more.
- Tunable White 2200-4500K with smooth transition between color temperatures
- Circadian SmartShift Capable to sync with local sunrise/sunset
- Suitable for open or enclosed fixtures in dry, damp, or wet environments.
- Title 20 Compliant, ENERGY STAR® compliant, UL Listed

Ordering Matrix

Family	Bulb	Wattage	Base Type	CRI/Color Temp	Type	Finish	SmartShift
LCB	ST19	6	E26	9TW	F	C	SS
A19 = A19 G25 = G25 ST19 = ST19 B11 = B11							
5 = 5W 6 = 6W							
E26 = E26 Base							
9TW = 90 CRI, Tunable White							
F = Filament							
C = Clear							
SS = SmartShift							