



Weight: 0.7 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Voltage	Watts	N/A
120V	N/A	Color Temp	N/A
208V	N/A	Color Accuracy	N/A
240V	N/A	L70 Lifespan	N/A
277V	N/A	Lumens	N/A
Input Watts	N/A	Efficacy	N/A

Technical Specifications

Performance

Product Type:

LED Tape Light Linear Driver - Damp rated

Description:

Versatile driver with high-performance dimming on ELV, TRIAC, and 0-10V dimming system that allows for dim-to-dark

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Power Factor:

0.95

Dimmable:

Yes, dimmable down to 0.1% on compatible TRIAC/ELV or 0-10V dimming systems. See Dimmer Compatibility List.

Input Voltage:

DC24V

Output Power:

96W Max

Output Voltage:

24VDC

Output Current:

4A

Operating Frequency:

47-63Hz

Operating Temperature:

-4°F to 113°F (-20°C to 45°C)

Storage Temperature:

-4°F (-20°C) to 140°F(60°C)

Construction

Material Construction:

Dedicated line voltage and low-voltage wiring compartments. Multiple 7/8" knock-outs for easy wire configuration.

Compliance

Listings:

UL Listed

Environment:

Suitable for use indoors in dry and damp environments.

IP Rating:

IP20

California Title 24 JA8 Compliant:

Can be used to conform with the requirements of California Title 24 Part 6.

California Energy Commission (CEC) Status:

Lawful for Sales in California

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Other

Compatible Products:

Compatible with the following ARCTAPE products: TICYY, TICY, TICYN, TICN, TICCW, TICLYY, TICLY, TICLYN, TICLN, TICLCW, TICHYY, TICHY, TICHYN, TICHN, TICHCW

Compatible with the following FLEXTAPE products: TOSYY, TOSY, TOSYN, TOSN, TOSCW, TOSLYY, TOSLY, TOSLYN, TOSLN, TOSLCW, TOSHYY, TOSHY, TOSHYN, TOSHN, TOSHCW

Compatible with the following NEOFLEX products: TNFYY, TNFY, TNFYN, TNFN, TNFLCW


Compatible with the following PURELINE products: TOCYY, TOCY, TOCYN, TOCN, TOCCW

Technical Specifications (continued)

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

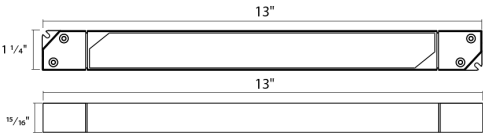

Features

- 120-277V Universal input voltage
- Phase dimmable, TRIAC/ELV
- 0.1% Performance dimming, dim-to-dark>Indoor Rated
- UL Listed and Title 24 JA8 Compliant
- 5-year limited warranty