




3-1/2 in. Liquidtight Straight Connector, Uninsulated

By RACO
Catalog # 3414

3-1/2 in. Liquidtight Straight Connector, Uninsulated

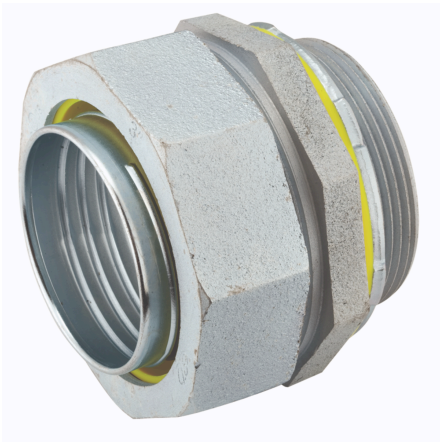

Features

- Use with flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- Zinc-electroplated for added corrosion protection
- Noninsulated
- Innovative split gland-ring assures a perfect seal, preventing pullouts
- Available in trade sizes 3/8 in. through 4 in.
- Sealing washer and heavy-duty locknut included
- All components are reusable

Specifications

Buy American Compliant Certified Listed	Contact Manufacturer • UL Listed • CSA Certified
Environmental Conditions Buy America(n) Qualified	Wet Location
Industry Standard(s)	Contact Manufacturer
Hazardous Rating(s)	UL 514B • Class I, Division 2 • Class II Division 1 & 2 • Class III, Division 1 & 2

Dimensions

Length	5.25 in
Trade Size	3-1/2 in

Weight	4.85 lb.
Height	3.75 in
Width	5.25 in
Dimensions	5.25 in x 5.25 in x 3.75 in

General

Conduit Type	Liquidtight
Product Family	Liquidtight
Insulation Type	Uninsulated
Fitting Type	Connectors
Product Type	Commercial Fittings
UPC	050169034149
Material	Steel/Malleable Iron

Logistics

Minimum Pack Quantity	1
Pallet Quantity	490
Carton Quantity	1

Product Assets

- [Catalog \[English\]](#)
- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)