




4 in. Liquidtight Straight Connector, Uninsulated

By RACO
Catalog # 3416

4 in. Liquidtight Straight Connector, Uninsulated

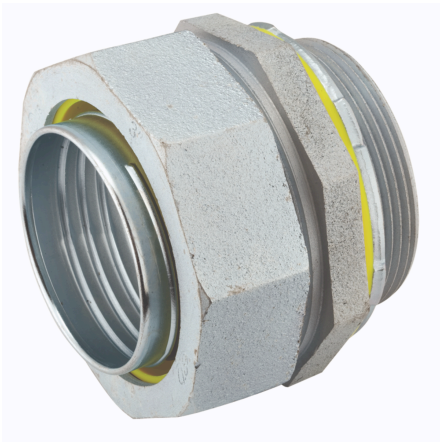

Features

- Use with flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- Zinc-electroplated for added corrosion protection
- Noninsulated
- Innovative split gland-ring assures a perfect seal, preventing pullouts
- Available in trade sizes 3/8 in. through 4 in.
- Sealing washer and heavy-duty locknut included
- All components are reusable

Specifications

Buy American Compliant	Contact Manufacturer
Certified Listed	• UL Listed • CSA Certified
Environmental Conditions	Wet Location
Buy America(n) Qualified	Contact Manufacturer
Industry Standard(s)	UL 514B
Hazardous Rating(s)	• Class I, Division 2 • Class II Division 1 & 2 • Class III, Division 1 & 2

Dimensions

Length	6.063 in
Trade Size	4 in

Weight	6.1 lb.
Height	4.25 in
Width	6.063 in
Dimensions	6.063 in x 6.063 in x 4.25 in

General

Conduit Type	Liquidtight
Product Family	Liquidtight
Insulation Type	Uninsulated
Fitting Type	Connectors
Product Type	Commercial Fittings
UPC	050169034163
Material	Steel/Malleable Iron

Logistics

Minimum Pack Quantity	1
Pallet Quantity	441
Carton Quantity	1

Product Assets

- [Catalog \[English\]](#)
- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)