



Main

Range of product	Modicon M340 automation platform
Product or component type	Analog output module
Electrical connection	1 connector 20 ways
Input output isolation	Isolated

Complementary

Measurement error	$\leq 0.25\%$ of full scale $0...60\text{ }^{\circ}\text{C}$ 0.1% of full scale $25\text{ }^{\circ}\text{C}$
Temperature drift	$40\text{ ppm}/^{\circ}\text{C} \pm 10\text{ V}$ $40\text{ ppm}/^{\circ}\text{C} 0...20\text{ mA}$ $40\text{ ppm}/^{\circ}\text{C} 4...20\text{ mA}$
Recalibration	Factory calibrated
Isolation voltage	1400 V DC between channels and ground 1400 V DC between channels and bus 750 V DC between channels
Detection type	Open circuit $0...20\text{ mA}$ Open circuit $4...20\text{ mA}$ Short circuit $\pm 10\text{ V}$
Load impedance ohmic	$\leq 600\text{ Ohm}$ $0...20\text{ mA}$ $\leq 600\text{ Ohm}$ $4...20\text{ mA}$ $\geq 1000\text{ Ohm}$ $\pm 10\text{ V}$
Output level	High level
Analogue output number	2
Analogue output type	Current $0...20\text{ mA}$ Current $4...20\text{ mA}$ Voltage $\pm 10\text{ V}$
Analogue output resolution	15 bits + sign
Supply	Internal power supply via rack
Conversion time	$\leq 1\text{ ms}$
Maximum conversion value	$0...24\text{ mA}$ $0...20\text{ mA}$ $0...24\text{ mA}$ $4...20\text{ mA}$ $\pm 11.25\text{ V}$ $\pm 10\text{ V}$ $\pm 10\text{ V}$

Fallback mode	Configurable Predefined
Status LED	1 LED green RUN 1 LED per channel green channel diagnostic 1 LED red ERR 1 LED red I/O
Product weight	0.144 kg
Current consumption	150 mA at 3.3 V DC 110 mA at 24 V DC

Environment

Ambient air temperature for operation	0...60 °C
Relative humidity	10...95 % without condensation
IP degree of protection	IP20
Protective treatment	TC

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0722 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available  Product environmental
Product end of life instructions	Available  End of life manual

Contractual warranty

Warranty period	18 months
-----------------	-----------

Modules Mounted on Racks


Dimensions

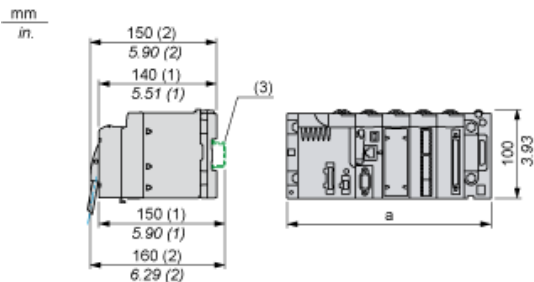

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Wiring Diagram

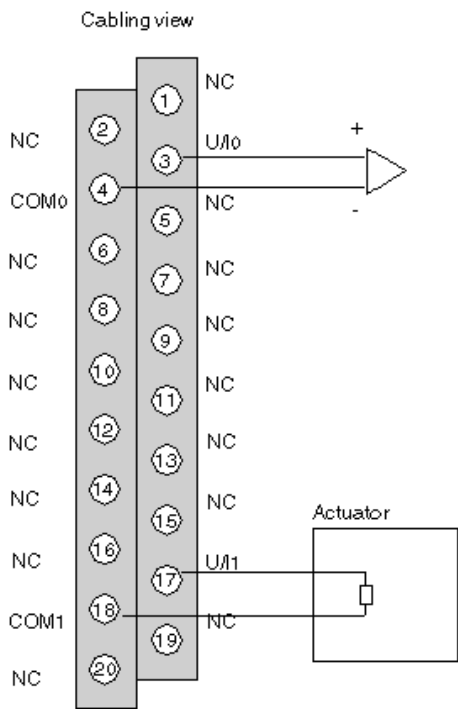

U/Ix + pole input for channel x

COMx pole input for channel x

Channel voltage actuator

Channel current actuator

The current loop is self-powered by the output and does not request any external supply.