

Product data sheet

Specifications



Safety analog input module, Modicon X80, 4 isolated inputs, 4 to 20mA

BMXSAI0410

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon X80
Product or Component Type	Analog input module
Electrical connection	20 ways 1 connector
Isolation between channels	Isolated
Input level	High level
Analogue input number	4
Analogue input type	Current 4...20 mA

Complementary

Analog/digital conversion	16 bits
Analogue input resolution	13 bits 0...12500 counts
Permitted overload on inputs	25 mA 4...20 mA
Input impedance	286 Ohm
Precision of internal conversion resistor	0.1 % - 15 ppm/°C
Type of filter	Second order digital filtering
Nominal read cycle time	6 ms for 4 channels
Measurement error	<= 0.3 % of full scale 4...20 mA - 25...60 °C
Temperature drift	30 ppm/°C 4...20 mA
Recalibration	Internal
Minimum crosstalk attenuation	120 dB
Digital value format	+/- 32000 in user scale +/- 10000 by default
Isolation voltage	500 V DC between channels 1500 V DC between channels and ground 1500 V DC between channels and bus
Measurement resolution	2 µA 4...20 mA
Maximum conversion value	0...25 mA 4...20 mA
MTBF reliability	463000 H
Operating altitude	0...6561.68 ft (0...2000 m) 2000...5000 m with derating factor
Status LED	1 LED (Green) RUN 1 LED per channel (Green) channel diagnostic 1 LED (Red) ERR 1 LED (Red) I/O

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Weight	0.315 lb(US) (0.143 kg)
Current consumption	200 mA 3.3 V DC 115 mA 24 V DC

Environment

Vibration resistance	3 gn
Shock resistance	15 gn
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Ambient Air Temperature for Operation	-13...140 °F (-25...60 °C)
Relative humidity	5...95 % 131 °F (55 °C) without condensation
IP Degree of Protection	IP20
Product Certifications	TÜV CSA EAC RCM UL ATEX Merchant Navy
Standards	CSA C22.2 No 61010-2-201 IEC 61131-2 IEC 61010-2-201 UL 61010-2-201

Environmental characteristic	Gas resistant class Gx Gas resistant class 3C4 Dust resistant class 3S4 Sand resistant class 3S4 Salt resistant level 2 Mold growth resistant class 3B2 Fungal spore resistant class 3B2 Fungal spore resistant class 3B2 IEC 60721-3-3
------------------------------	--

Ordering and shipping details

Category	US1PC3418161
Discount Schedule	PC34
GTIN	3606481204943
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.165 in (5.500 cm)
Package 1 Width	7.087 in (18.000 cm)
Package 1 Length	10.236 in (26.000 cm)
Package weight(Lbs)	12.134 oz (344.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	8
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)

Package 2 Weight	7.363 lb(US) (3.340 kg)
------------------	-------------------------

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	165 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	19 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.3 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	144 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.4 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	43b0fbab-d94b-43e8-be0a-0b39cadd288b
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	0
Circularity Profile	End of Life Information
Take-back	No

Dimensions Drawings

Modules Mounted on Racks

Dimensions

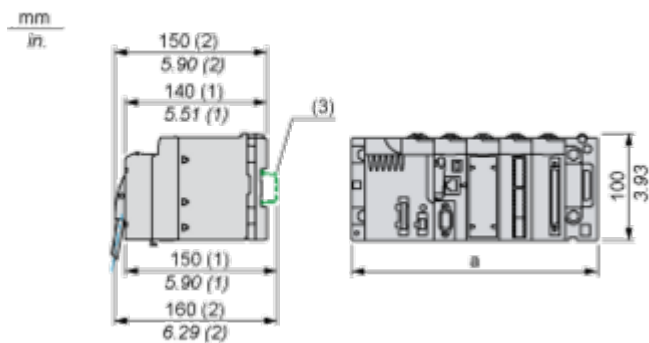

- (1) With removable terminal block (cage, screw or spring).
(2) With FCN connector.
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Image of product / Alternate images

Alternative

