
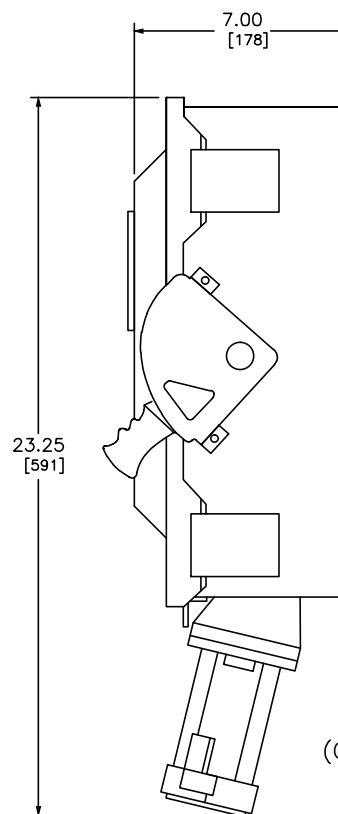



TERMINAL LUGS ‡			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
60	#3 AWG	#12 AWG	AL
60	#3 AWG	#14 AWG	CU

NOTES:
 FINISH: SWITCHES - GRAY BAKED ENAMEL
 CROUSE - HINDS RECEPTACLE - CAST ALUMINUM
 CSA CERTIFIED - FILE #LL-89067
 SHORT CIRCUIT CURRENT RATINGS:
 10,000 AMPERES WHEN USED WITH OR PORTECTED BY CLASS H OR K FUSES.
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R OR J FUSES.
 WHEN MOUNTING THESE SWITCHES, ALLOW 4.00/102 MIN CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE
 HINGED DOOR.
 *USE BOTH OUTER SWITCHING POLES.
 ‡LUGS SUITABLE FOR 60°C OR 75°C CONDUCTORS ONLY.

CATALOG NUMBER	VOLTAGE RATINGS	AMPERE RATING	WIRING DIAG.	HORSEPOWER RATINGS										
				240VAC		480VAC				600VAC			250 * VDC	
				MAX.		STD.		MAX.		STD.	MAX.			
				1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	3Ø	1Ø	3Ø	STD.	MAX.
CH362AWC CHU362AWC	600VAC;250VDC 600VAC;250VDC	60 60	A B	— 10	— 20	5 —	15 —	20 25	30 50	15 —	— 30	50 60	10 —	— 10

HEAVY DUTY SAFETY SWITCHES
 WITH RECEPTACLE
 60 AMPERE - SERIES F7
 ENCLOSURE - TYPE 12/3R

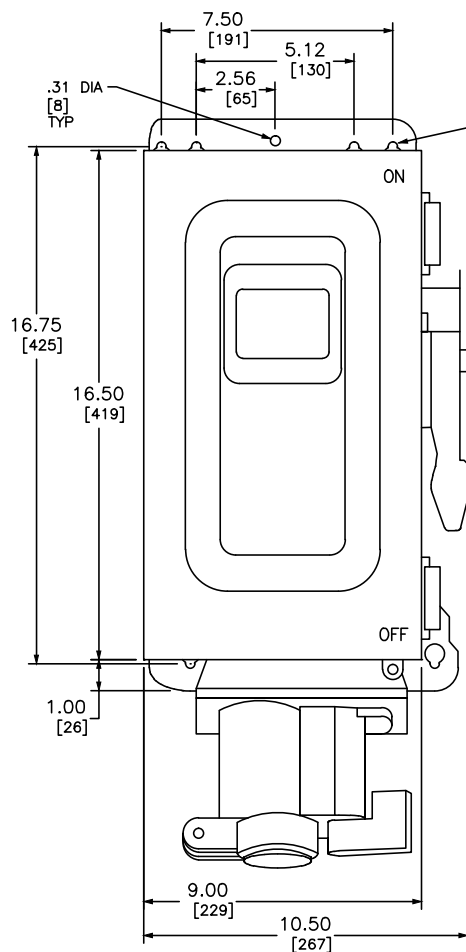

DWG# 3133C
 NO.