

Product data sheet

Specifications



flat screen, Harmony iPC, 19inch wide display, multi touch, for modular box pc

HMIDM9521

⚠ Discontinued on: Jun 20, 2025

⚠ To be end-of-service on: Apr 30, 2029

⚠ Discontinued

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony iPC
Terminal type	Touchscreen display
Product or Component Type	Flat screen

Complementary

View angle horizontal x vertical	150 x 140°
Contrast Ratio	500:1
Touchscreen resolution	4096 x 4096
Display resolution	1366 x 768 pixels WHD FWXGA
Display type	Colour TFT LCD LED
Luminance	27.9 fc (300 cd/m²)
Touch panel	Multi-touch projected capacitive technology (PCT)
Function Available	Operate with water on screen
Product Compatibility	Modular Box PC
Display size	18.5 inch
Aspect ratio	16:9
[Us] rated supply voltage	24 V DC power supply 100...240 V AC power supply
Supply voltage limits	18...36 V
Display colour	16777216 colors
Pixel resolution	1366 x 768
Local signalling	Status LED
Inrush current	8.9 A
Device mounting	Flush
Width	19.2 in (488.3 mm)
Height	12.2 in (309 mm)
Net Weight	11.5 lb(US) (5.2 kg)

Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	UL 60950 CSA C22.2 No. 60950
Pollution degree	2
Operating altitude	6561.68 ft (2000 m)
Product certifications	EAC C-tick CCC
NEMA degree of protection	NEMA 4X
Ambient air temperature for operation	32...131 °F (0...55 °C)

Ordering and shipping details

Category	US10MC222574
Discount Schedule	0MC2
GTIN	3606480853685
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.3 in (23.5 cm)
Package 1 Width	24.2 in (61.5 cm)
Package 1 Length	29.2 in (74.2 cm)
Package weight(Lbs)	11.5 lb(US) (5.2 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1261
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
F-gas usage performance	Only air and vacuum used for insulation / breaking, no F-gas including SF6
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	5dc260f8-71ed-4cb7-a2e6-05d0987d6ab8
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Product contains halogen above thresholds
PVC free	No
Silicon free	No

Use Again

Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions

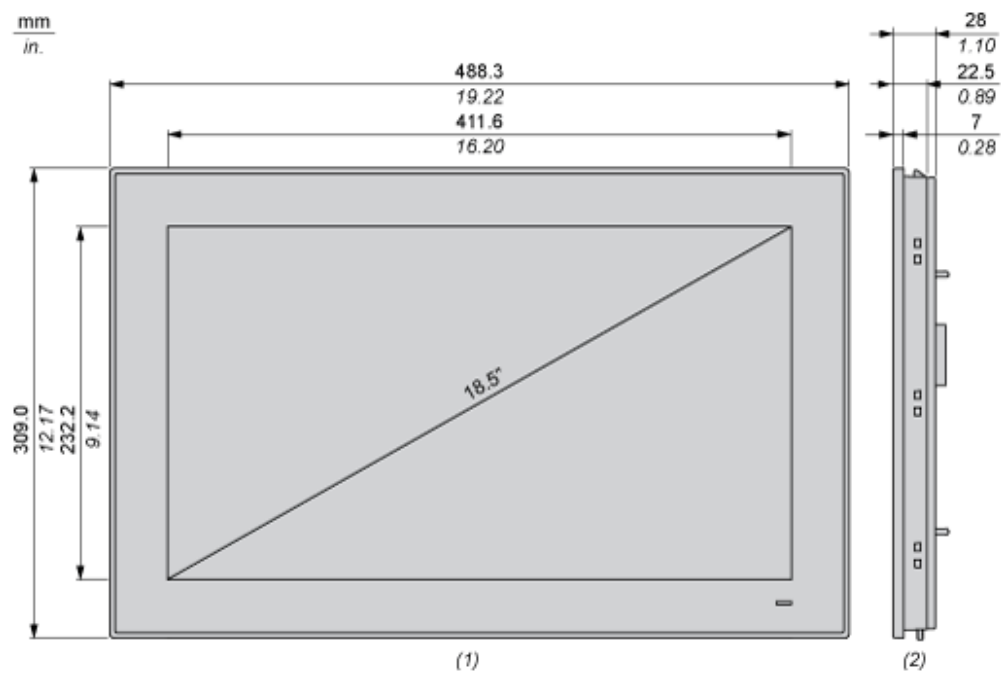

- (1) Front view
- (2) Right view


Mounting and Clearance

Spacing Requirements

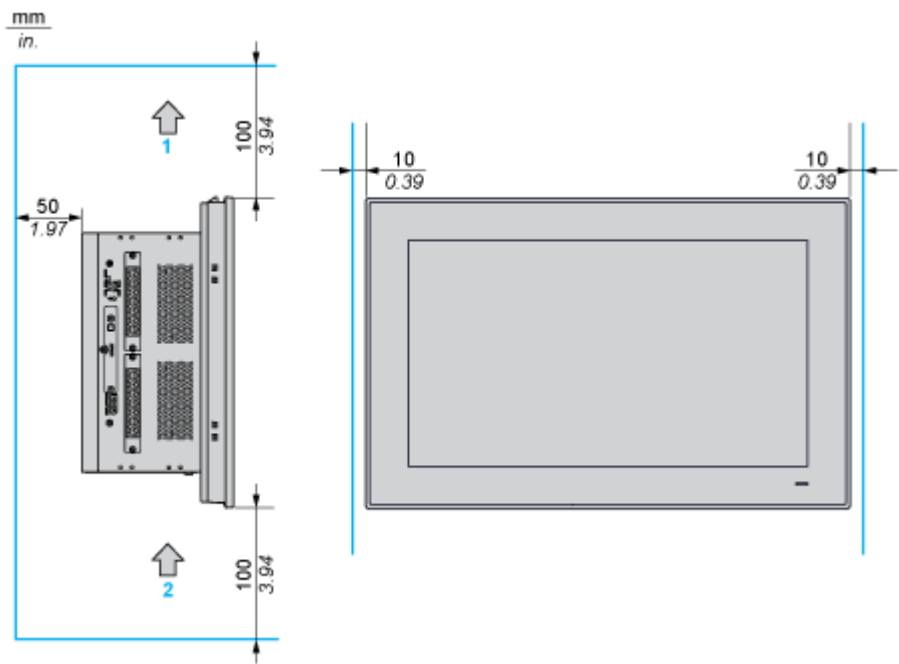


- 1 : Air out
- 2 : Air in

Mounting Orientation

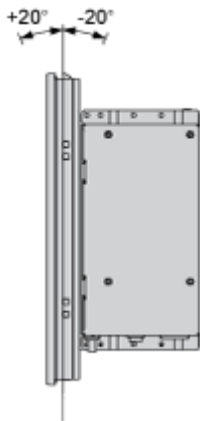

Panel Cut Dimensions

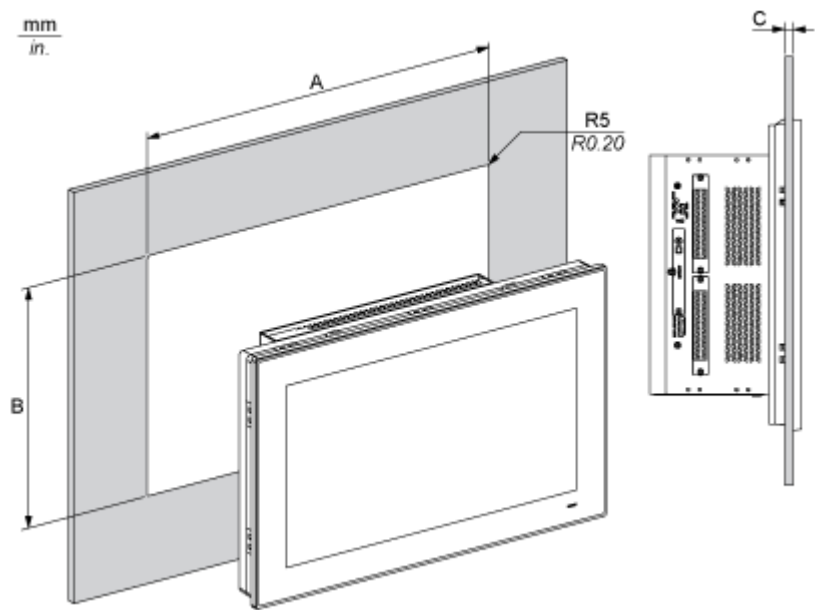

A		B		C		R	
mm	in.	mm	in.	mm	in.	mm	in.
479.3	18.87	300.3	11.82	2...6	0.08...0.23	5	0.20