

Product End of Life Instructions

I-Line Enable U-PaS, 600V - ICWR262XUPAS





Potential disassembly risks

⚠ DANGER


HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E, CSA Z462 or NOM-029-STPS.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Turn off all power supplying this equipment before working on or inside equipment.
- Always use a properly rated voltage sensing device to confirm that all power is off.
- Read and understand this entire Instruction bulletin and the latest edition of the included NEMA PB 1.1 standards publication before installing, operating, or maintaining this equipment.
- Local codes vary, but are adopted and enforced to promote safe electrical installations. A permit may be needed to do electrical work, and some codes may require an inspection of the electrical work.
- Replace all devices, doors, and covers before turning on power to this equipment.

Failure to follow these instructions will result in death or serious injury.



End of Life Instructions

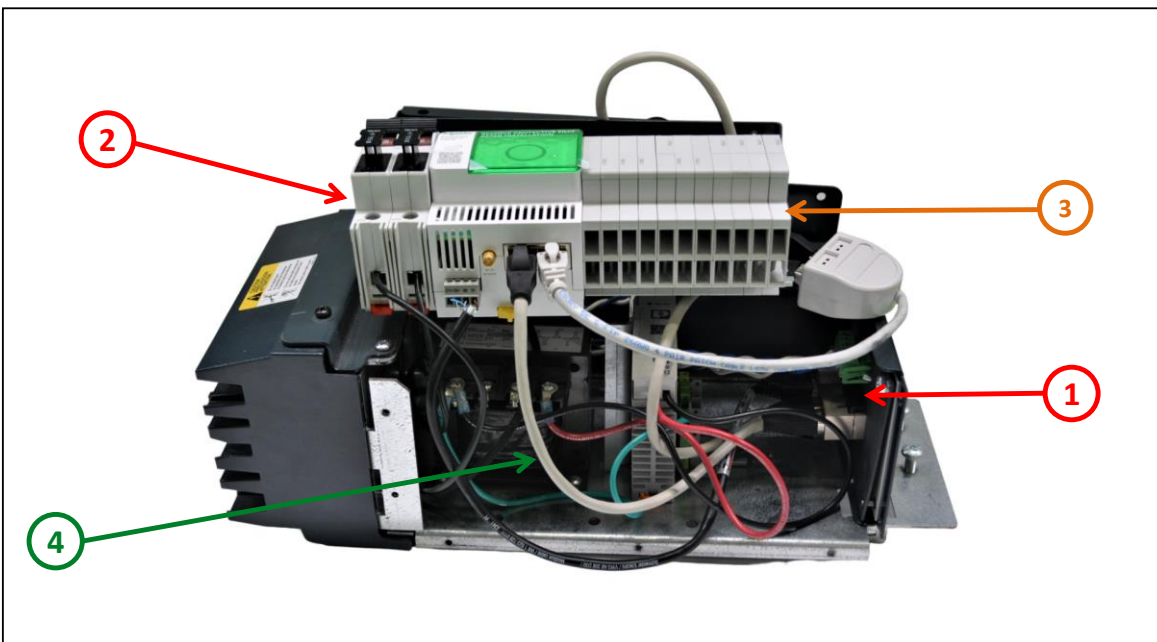

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
Potential hazards	1	Electronic Board (Communication) > 10cm ²	51.994	BASIC PANEL SERVER -72MM-DIGITAL PCBA
Potential hazards	2	Electronic Board (Communication) > 10cm ²	34.026	BASIC PANEL SERVER -72MM-HMI PCBA
Potential hazards	3	Electronic Board (Communication) > 10cm ²	14.974	BASIC PANEL SERVER -72MM-POWER PCBA -24V
To be depolluted	4	Cable (high current)	198.7	Cables



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	U-PaS I-Line Enable Module is the communication system modular unit featuring the Universal Panel Server. The unit enables and offers Ethernet communication, Modbus-SL communications, and Digital Inputs. System voltages available: 240V, 480V and 600V.
Product reference	ICWR262XUPAS
Additional similar product references	ICNL2222MMS ICNR2222MMS ICNL2422MMS ICNR2422MMS ICWL2222MMS ICWR2222MMS ICWL2422MMS ICWR2422MMS ICWL2622MMS ICWR2622MMS ICNL222XUPAS ICNR222XUPAS ICNL242XUPAS ICNR242XUPAS ICWL222XUPAS ICWR222XUPAS ICWL242XUPAS ICWR242XUPAS ICWL262XUPAS ICWR262XUPAS
Total representative product mass	6618 g
Representative product dimensions	153 mm x 201 mm x 378 mm
Accessories	No
Date of information release	10-2024



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No	
Recyclability potential	46%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 928 298 512 €

www.se.com

ENVEOLI2409035_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

10-2024