

Product data sheet

Specifications



Spacial SF/SM 19" swing rack - 2000x800 mm - 40 modules

NSYRSW40

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range	PanelSeT
Accessory / separate part category	Mounting accessory
Product or Component Type	19" rack
Application	Electronic application
For enclosure nominal dimensions	- H: 78.7 in (2000 mm)
Rack type	Swing
Mounting Location	On structure of enclosure
Range compatibility	PanelSeT PanelSeT SF PanelSeT PanelSeT SM
Device composition	fixing elements 2 800 mm swing rack supports 1 hinged rack 1 side lid with handle
Quantity per Set	Set of 1
Number of units 19"	40

Complementary

Rack coverage	Complete
Rack position	Off-centered
Material	steel
Enclosure/cubicle description	Floor-standing enclosure
Surface Finish	Zinc coated
Lock type	Handle with ball lock
Fixing Mode	By fixing element
Adjustment	Adjustable in depth every 25 mm
color	Side plate Gray RAL 7035)
Permanent permissible load	8.27 lb(US) (3.75 kg) per unit with a maximum of 150 kg
Opening of the 19" racks	Reversible 120 °
Height	78.7 in (2000 mm)
Width	31.5 in (800 mm)
Depth	74.8 in (1901 mm)

Ordering and shipping details

Category	US10ES180036
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discount Schedule	0ES1
GTIN	3606480067280
Returnability	No
Country of origin	ES

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.724 in (12.000 cm)
Package 1 Width	28.543 in (72.500 cm)
Package 1 Length	77.165 in (196.000 cm)
Package weight(Lbs)	57.320 lb(US) (26.000 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	12
Package 2 Height	47.244 in (120.000 cm)
Package 2 Width	47.244 in (120.000 cm)
Package 2 Length	82.677 in (210.000 cm)
Package 2 Weight	769.414 lb(US) (349.000 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	209 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	127 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	6 kg CO2 eq.
Carbon footprint of the installation phase [A5]	7 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	69 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
SCIP Number	E893f0a0-d2cc-4011-9425-3873dde70142
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	98
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

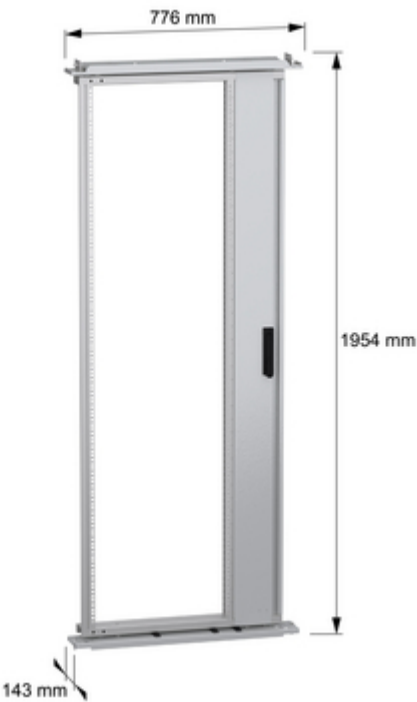

Technical Illustration

Exploded view

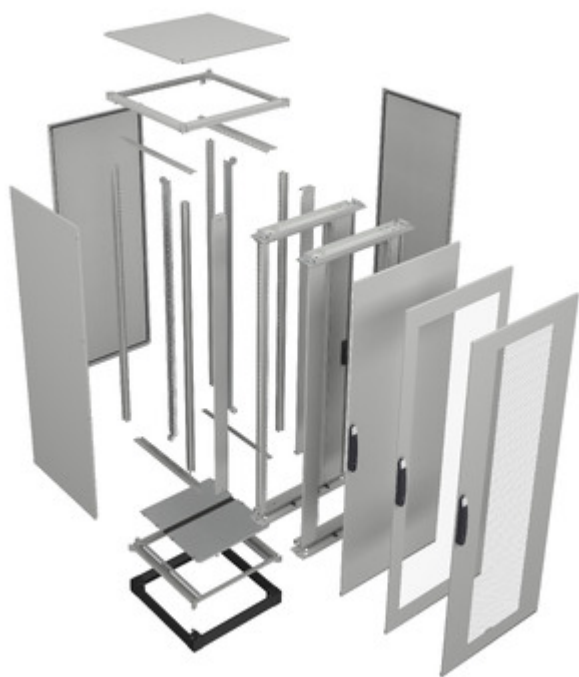


Image of product / Alternate images

Alternative

