


Product data sheet

Specifications



PC box IP66 IK08 RAL7035
Int.H125W80D65 Ext.H138W93D72
Transp.cover H20

NSYTBP1397T

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range	PanelSeT
Product name	PanelSeT TBP
Device Application	Multi-purpose
Category	Industrial box
Height	5.4 in (138 mm)
Width	3.7 in (93 mm)
Depth	2.8 in (72 mm)
Internal height	4.9 in (125 mm)
Internal width	3.1 in (80 mm)
Internal depth	2.6 in (65 mm)
Enclosure mounting	Wall mounted
Device composition	1 body 1 cover 4 cover screw
Quantity per Set	Set of 2
Body type	One piece moulded
Type of front cover	Low transparent cover
Cover fixing	Plastic screws
Lock type	Captive screw flat outside sealed area
Removable parts	Cover by captive screws

Complementary

Material	polycarbonate
color	Gray RAL 7035) Transparent
Standards	IEC 62208 UL 508 A
Product Certifications	TÜV UL
Electrical Insulation Class	Class II
Mounting location	Outdoor (with canopy or shelter and anticondensation valve)
Product Weight	0.51 lb(US) (0.23 kg)

Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

IP degree of protection	IP66 conforming to NEMA 4.4X
IK degree of protection	IK08 conforming to IEC 62262
Fire resistance	1760 °F (960 °C)
Ambient Air Temperature for Storage	5...140 °F (-15...60 °C)
Operating temperature	-13...176 °F (-25...80 °C)

Ordering and shipping details

Category	US10ES180033
Discount Schedule	0ES1
GTIN	3606480165788
Returnability	No
Country of origin	HU

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.835 in (7.200 cm)
Package 1 Width	3.661 in (9.300 cm)
Package 1 Length	5.433 in (13.800 cm)
Package weight(Lbs)	8.113 oz (230.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	2
Package 2 Height	8.071 in (20.500 cm)
Package 2 Width	3.346 in (8.500 cm)
Package 2 Length	5.709 in (14.500 cm)
Package 2 Weight	17.778 oz (504.000 g)
Unit Type of Package 3	CAR
Number of Units in Package 3	58
Package 3 Height	15.748 in (40.000 cm)
Package 3 Width	15.748 in (40.000 cm)
Package 3 Length	23.622 in (60.000 cm)
Package 3 Weight	34.242 lb(US) (15.532 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	2 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	1 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.5 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	1
Circularity Profile	End of Life Information
Take-back	No

Technical Illustration

Dimensions

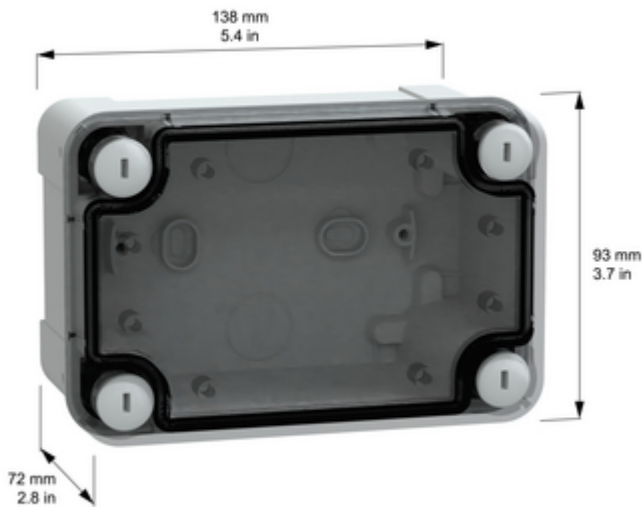


Image of product / Alternate images

Alternative

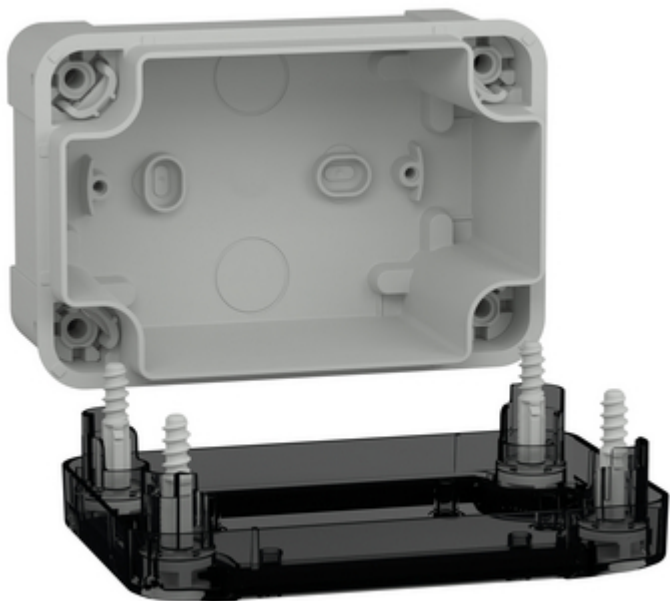


Image of product in real life situation

