

Product data sheet

Specifications



pump control relay, Harmony Control Relays, 5A, 1CO, 208...480V AC

RM35BA10

Main

Range of product	Harmony Control Relays
Relay type	Pump control relays
Product or component type	Pump control relay
Product specific application	For 3-phase and single-phase pump
Relay name	RM35BA
Relay monitored parameters	Overcurrent and undercurrent control Phase sequence on 3-phase supply Phase failure on 3-phase supply
Time delay type	Adjustable 1...60 s, +/- 10 % Ti- inhibition time delay upon startup Adjustable 0.1...10 s, +/- 10 % Tt- time delay upon fault
Switching capacity in VA	1250 VA
Minimum switching current	10 mA at 5 V DC
Maximum switching current	5 A AC/DC
Maximum power consumption in VA	5 VA AC
Measurement range	1...10 A 208...480 V AC
Utilisation category	AC-12 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1

Complementary

reset time	2000 ms
Maximum switching voltage	250 V AC/DC
[Un] rated nominal voltage	208...480 V AC 50/60 Hz, non self-powered 230 V AC 50/60 Hz, non self-powered
Supply voltage limits	183...528 V AC
operating voltage tolerance	- 15 % + 10 % Un
Resistance across terminals	0.01 Ohm at E1-L2 terminals
Width	35 mm
Output contacts	1 C/O
nominal output current	5 A
Maximum measuring cycle	140 ms as true rms value
delay at power up	0.5 s

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Hysteresis	5 % of threshold
Measurement accuracy	+/- 10 % of the full scale value
Repeat accuracy	+/- 1 % for input and measurement circuit +/- 1 % for time delay
Measurement error	1 % by volt over the whole range +/- 0.05 %/°C
Response time	< 300 ms (in the event of a fault)
overload input current	11 A permanent at 25 °C E1-L2 terminals 50 A non repetitive < 1 s at 25 °C E1-L2 terminals
Marking	CE : EMC 89/336/EEC CE : 73/23/EEC
Overvoltage category	III conforming to IEC 60664-1
Insulation resistance	> 500 MOhm at 500 V DC between supply and relay output conforming to 60255-5 > 500 MOhm at 500 V DC between measurement and relay output conforming to 60664-1 > 1 MOhm at 500 V DC between supply and measurement conforming to 60255-5 > 500 MOhm at 500 V DC between supply and relay output conforming to 60664-1 > 500 MOhm at 500 V DC between measurement and relay output conforming to 60255-5 > 1 MOhm at 500 V DC between supply and measurement conforming to 60664-1
[Ui] rated insulation voltage	400 V conforming to IEC 60664-1
Supply frequency	50/60 Hz +/- 10 %
Operating position	Any position
Connections - terminals	Screw terminals, 1 x 0.5...1 x 4 mm ² (AWG 20...AWG 11) solid without cable end Screw terminals, 2 x 0.5...2 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Screw terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 12) flexible with cable end Screw terminals, 2 x 0.2...2 x 1.5 mm ² (AWG 24...AWG 16) flexible with cable end
Tightening torque	0.6...1 N.m conforming to IEC 60947-1
Housing material	Self-extinguishing plastic
Status LED	1 LED green for power ON 1 LED yellow for fault 1 LED yellow for relay ON
Mounting support	35 mm symmetrical DIN rail conforming to IEC 60715
Electrical durability	100000 cycles
Mechanical durability	30000000 cycles
Operating rate	<= 360 operations/hour full load
Control type	Without test button

Environment

Immunity to microbreaks	500 ms
Electromagnetic compatibility	Emission standard for industrial environments conforming to IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments conforming to IEC 61000-6-3 Immunity for industrial environments conforming to NF EN/IEC 61000-6-2
Standards	IEC 60255-6
Product certifications	C-Tick CSA GOST UL GL
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-20...50 °C

Relative humidity	95 % at 55 °C conforming to IEC 60068-2-30
Vibration resistance	0.35 mm (f= 5...57.6 Hz) conforming to IEC 60068-2-6/IEC 60255-21-1 1 gn (f= 57.6...150 Hz) conforming to IEC 60068-2-6/IEC 60255-21-1
Shock resistance	15 gn for 11 ms conforming to IEC 60255-21-1
IP degree of protection	IP20 (terminals) conforming to IEC 60529 IP30 (casing) conforming to IEC 60529
Pollution degree	3 conforming to IEC 60664-1
Dielectric strength	2 kV AC 50 Hz (shock wave 4 kV)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.0 cm
Package 1 Width	4.6 cm
Package 1 Length	9.7 cm
Package 1 Weight	123.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	48
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	6.526 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Total lifecycle Carbon footprint	102
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	5e3fdf99-611b-4d07-ad17-6eba84ab488b
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

 Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	No

Dimensions Drawings

3-Phase and Single-Phase Pump Control Relays

Dimensions and Mounting

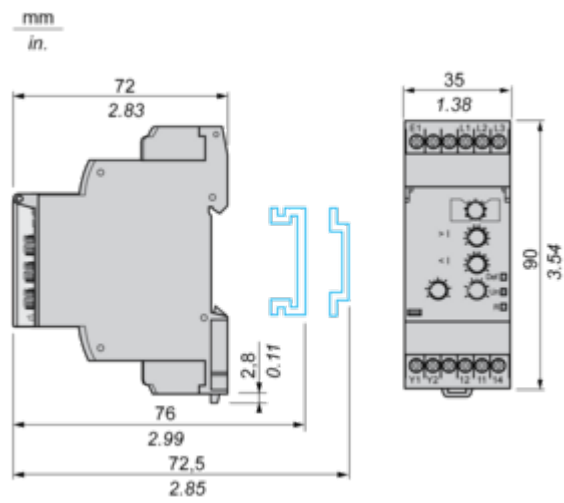


Connections and Schema


3-Phase and Single-Phase Pump Control Relays

Wiring Diagrams


3-phase < 10 A

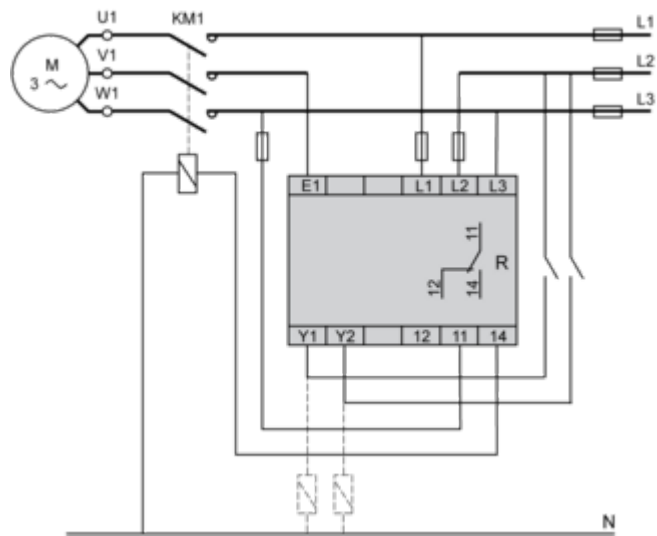


Single-phase ~ 230 V < 10 A

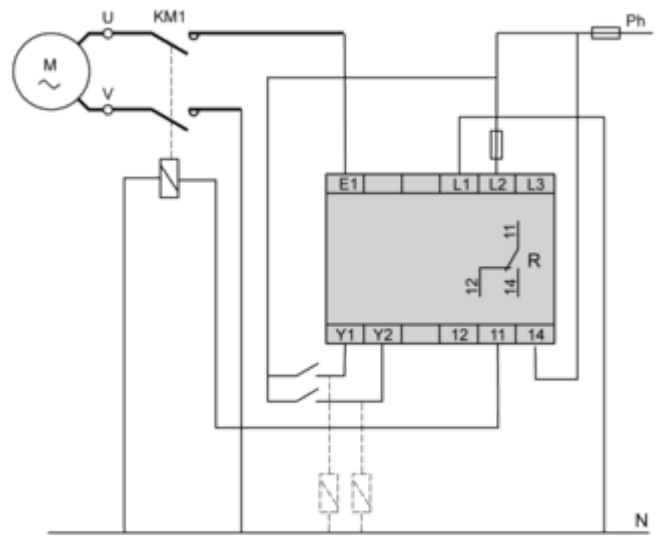

3-phase > 10 A

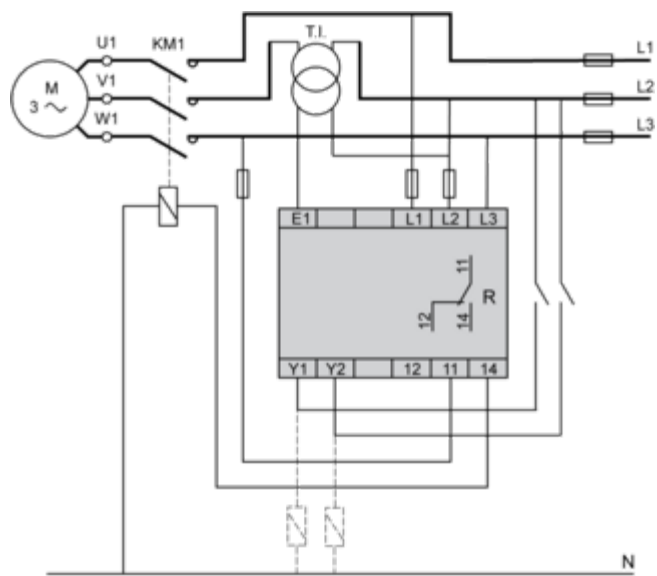

Single-phase ~ 230 V > 10 A

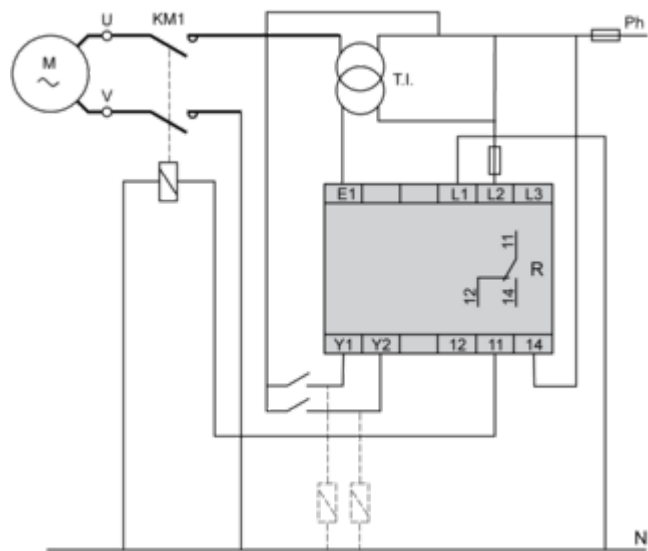

Technical Description

Function Diagrams

Single Control Mode

This mode is designed to control a pump via an external signal. The relay output is closed when the signal is present at Y1 (contact closed). Y2 can be used to reset the relay after a current fault.



Double Control Mode


This mode is designed to control a pump via two external control signals (Y1 and Y2). The output relay closes when both input signals are present (Y1 and Y2 closed).




Current Control

If the control relay is configured for a single-phase supply, it monitors the current consumed by the pump. If the control relay is configured for a 3-phase supply, it monitors the current, phase sequence and phase failure.

Overcurrent detection

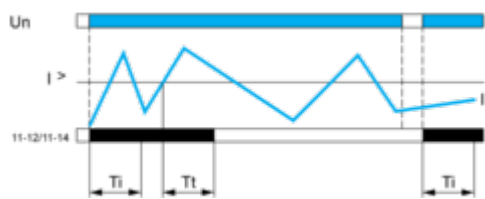

Undercurrent Detection

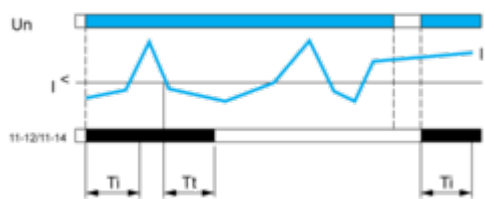

Legend

- Ti Time delay to inhibit fault monitoring on starting of pump
- Tt Time delay in the event of a fault
- Un 3-phase or single-phase power supply
- I Monitored current
- I < Undercurrent threshold
- I > Overcurrent threshold
- I. Def Presence of a current fault
- 11-12, 11-14 Output relay connections
- Relay status: black color = energized.

Technical Illustration

Dimensions

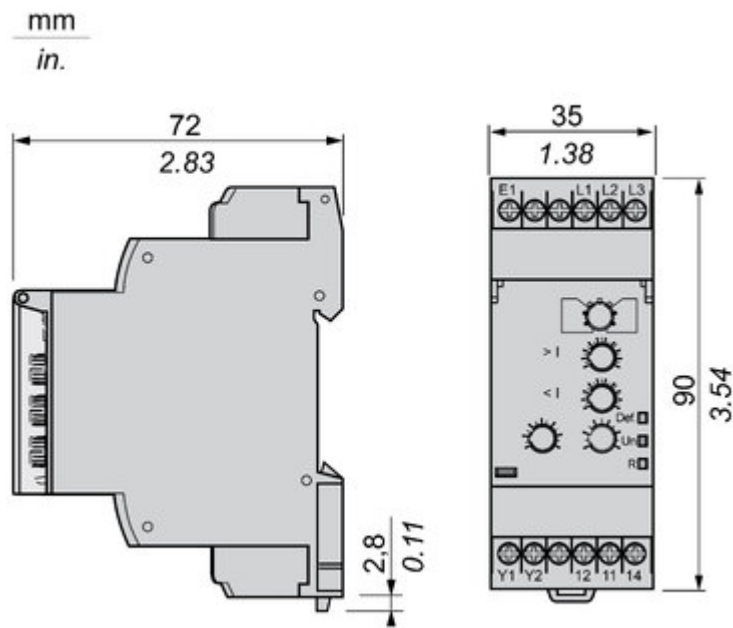


Image of product / Alternate images

Alternative

