

Product data sheet

Specifications



Analog I/O expansion block, Modicon TM7, IP67, 4 RTD inputs, M12 connector

TM7BAI4TLA

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon TM7
Product or Component Type	Analog I/O expansion block
Range Compatibility	Modicon M258 Modicon LMC058
Analogue input number	4
Enclosure Material	Plastic
Bus type	TM7 bus

Complementary

Analogue input type	KTY 84 silicon temperature probe KTY 10 silicon temperature probe Pt 1000 temperature probe Pt 100 temperature probe
Input wiring mode	2, 3 or 4 wires
Analogue input resolution	16 bits
Input impedance	0...3276 Ohm
Sampling duration	75 ms per input channels 195 ms per input channels
Sensor power supply	24 V
Power dissipation in W	2.3 W
Electrical connection	1 male connector M12 - B coding - 4 ways bus IN 1 female connector M12 - B coding - 4 ways bus OUT 4 female connectors M12 - A coding - 5 ways sensor 1 male connector M8 - 4 ways power IN 1 female connector M8 - 4 ways power OUT
Operating position	Any position
Fixing Mode	By 2 screws
Local signalling	2 LEDs bus diagnostic 2 LEDs sensor/actuator power supply status
Height	3.3 in (85 mm)
Width	2.09 in (53 mm)
Depth	1.7 in (42 mm)
Product Weight	0.4 lb(US) (0.2 kg)

Environment

IP Degree of Protection	IP67
Marking	CE

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product certifications	GOST-R ATEX II 3g EEx nA II T5 CURus C-tick
Standards	IEC 61131-2
Ambient air temperature for operation	14...140 °F (-10...60 °C)
Ambient air temperature for storage	-13...185 °F (-25...85 °C)
Relative humidity	5...95 % without condensation or dripping water
Operating altitude	0...6561.68 ft (0...2000 m)
Pollution degree	2
Vibration resistance	7.5 mm constant amplitude 2...8 Hz) IEC 60721-3-5 Class 5M3 2 gn constant acceleration 8...200 Hz) IEC 60721-3-5 Class 5M3 4 gn constant acceleration 200...500 Hz) IEC 60721-3-5 Class 5M3
Shock resistance	30 gn 11 msIEC 60721-3-5 Class 5M3
Electromagnetic compatibility	EN/IEC 61000-4-6

Ordering and shipping details

Category	US1PC1222532
Discount Schedule	PC12
GTIN	3595864093147
Returnability	No
Country of origin	AT

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.969 in (5.000 cm)
Package 1 Width	2.323 in (5.900 cm)
Package 1 Length	4.055 in (10.300 cm)
Package weight(Lbs)	7.654 oz (217.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	24
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	12.145 lb(US) (5.509 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	63 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	12 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	51 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	10
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Presentation

Analog Temperature Input Block

Description

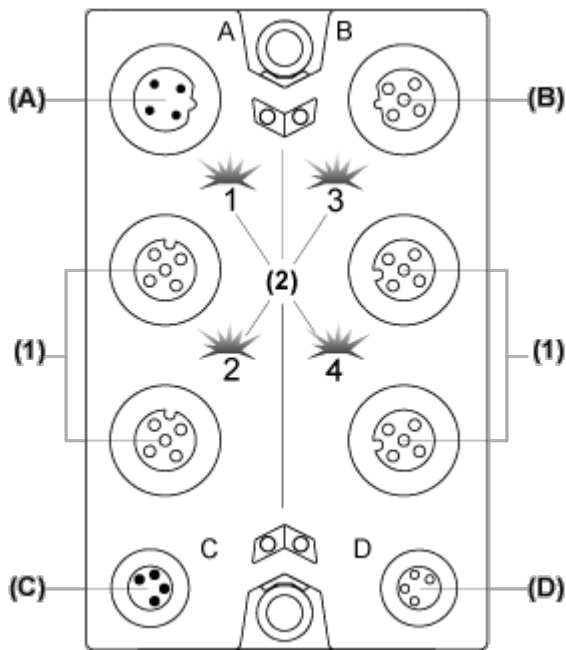

- (A) TM7 bus IN connector
- (B) TM7 bus OUT connector
- (C) 24 Vdc power IN connector
- (D) 24 Vdc power OUT connector
- (1) Input connectors
- (2) Status LEDs


Connector and Channel Assignments

Input connectors	Channel type	Channels
1	Input	I0
2	Input	I1
3	Input	I2
4	Input	I3

Dimensions Drawings


TM7 Block, Size 1

Dimensions

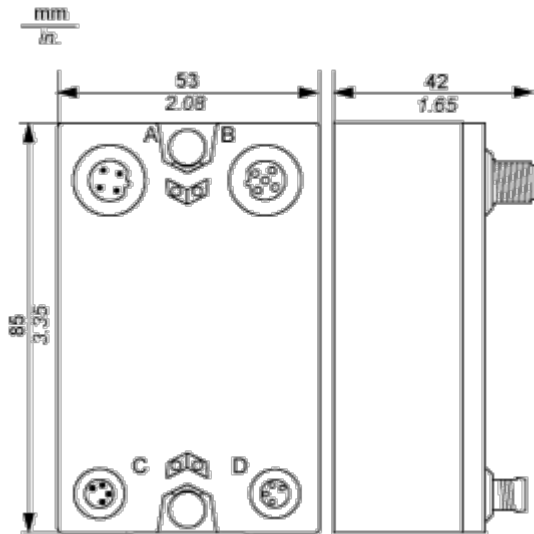

Mounting and Clearance


Spacing Requirements

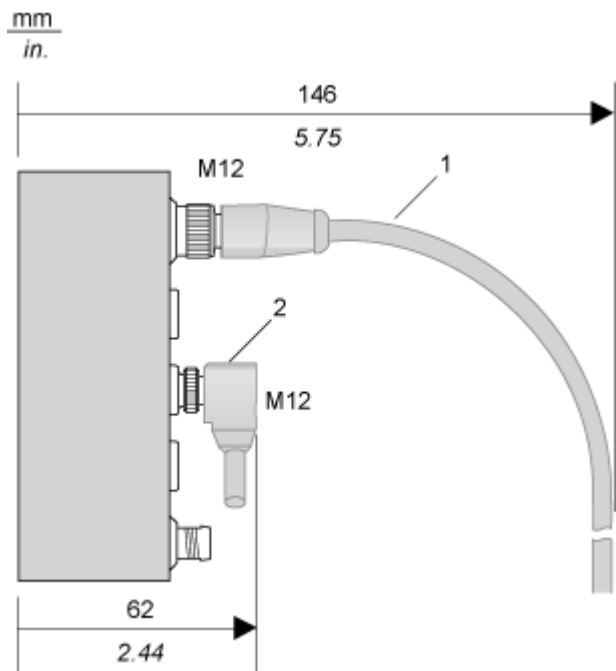

- 1 Straight cable
- 2 Elbowed cable


Installation Guidelines

TM7 Block on an Aluminium Frame

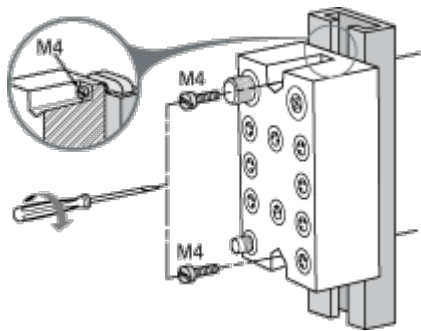

NOTE: Maximum torque to fasten the required M4 screws is 0.6 N.m (5.3 lbf-in).

TM7 Block on a DIN Rail


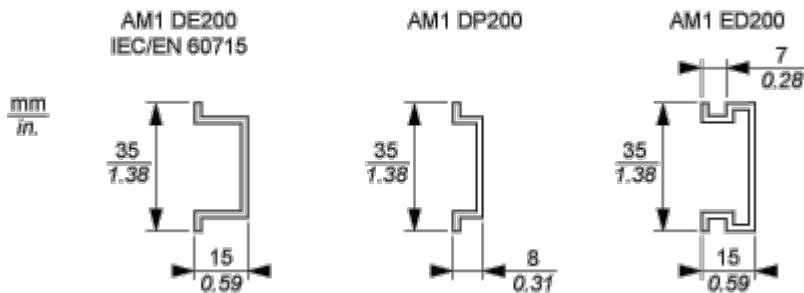


NOTE: Only size 1 (smallest) blocks can be installed on DIN rail with the TM7ACMP mounting plate.

TM7 Block Directly on the Machine


Drilling template of the block:

mm
in.

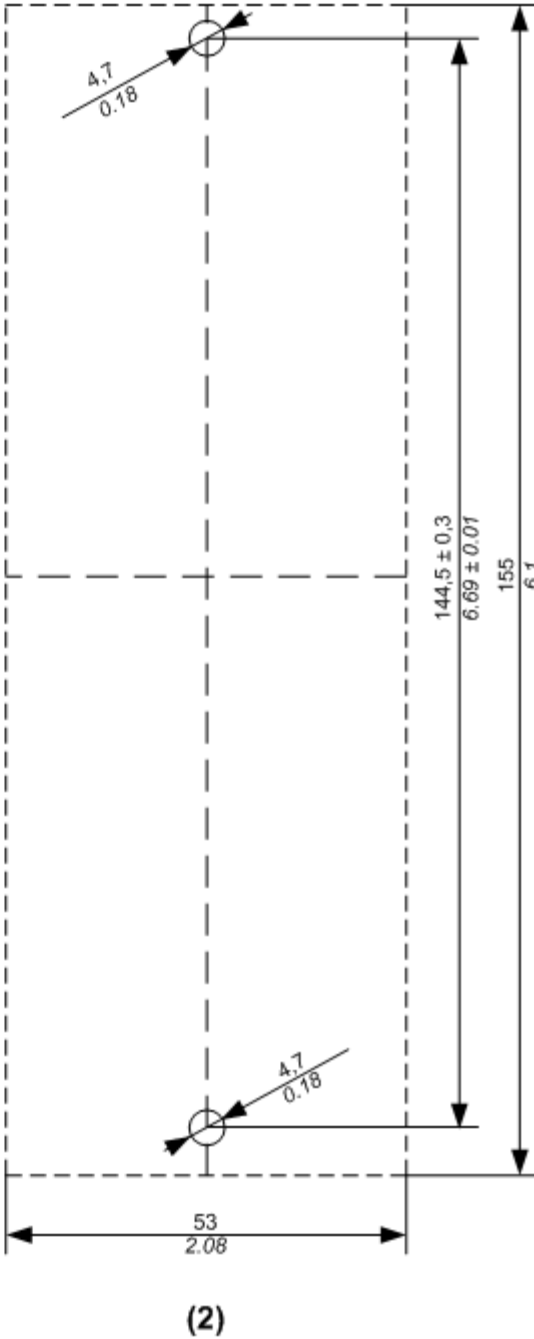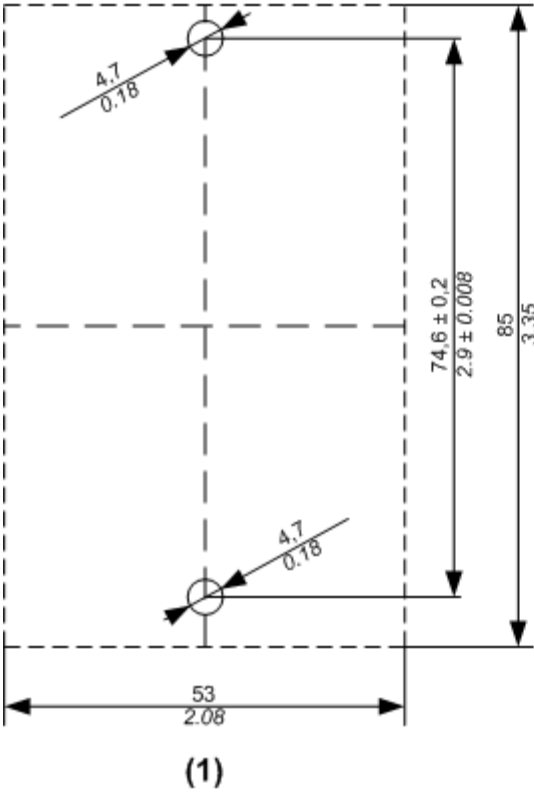

- (1) Size 1
- (2) Size 2

The thickness of the base plate should be taken into consideration when defining the screw length.

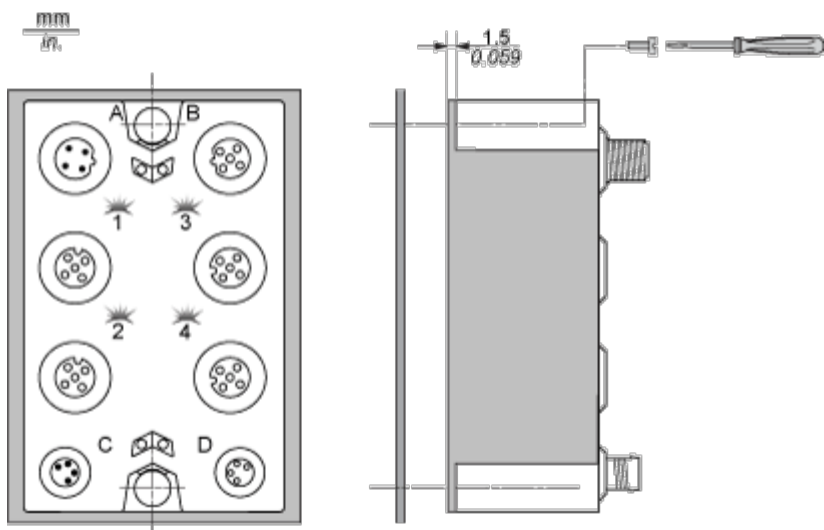


NOTE: Maximum torque to fasten the required M4 screws is 0.6 N.m (5.3 lbf-in).


Connections and Schema

Wiring Diagram

Pin Assignments for Input Connectors

Connection	Pin	M12 input
	1	Sensor +
	2	Sense +
	3	Sensor -
	4	Sense -
	5	Shield

2 Wires Sensor Wiring

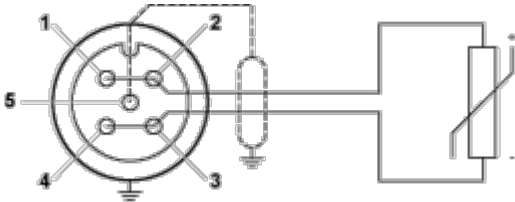


Pin	Description
1	Sensor + (¹)
2	Sense + (¹)
3	Sensor - (²)
4	Sense - (²)
5	Shield

The following M12 connector pins must be bridged together:

- ¹: Pins 1 and 2
- ²: Pins 3 and 4

4 Wires Sensor Wiring

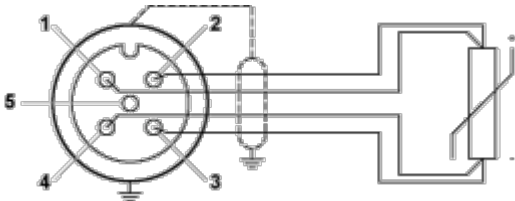


Pin	Description
1	Sensor +
2	Sense +
3	Sensor -
4	Sense -
5	Shield

Wiring the Power Supply

When you provide power to a TM7 I/O block using the 24 VDC Power OUT connector of the preceding I/O block, both blocks occupy the same 24 Vdc I/O power segment. However, if you connect an external isolated power supply to the 24 Vdc Power IN connector of a TM7 I/O block, you establish a new 24 Vdc I/O power segment beginning with that I/O block.

I/O block wired with one external 24 Vdc power supply:

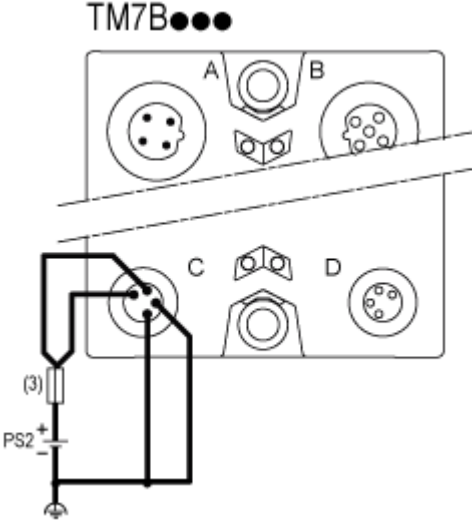

(3) External fuse, Type T slow-blow, 8 A max., 250 V

PS2 External isolated I/O power supply, 24 Vdc