

Product data sheet

Specifications



EMC radio interference input filter, for variable speed drive, 200A

VW3A4708

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range of Product	Altivar
Product or Component Type	EMC input filter
Range Compatibility	Altivar Process ATV900 Altivar Machine ATV340 Altivar Process ATV600
Product compatibility	Variable speed drive ATV630 wall mount, 75 kW, 380...480 V Variable speed drive ATV630 wall mount, 90 kW, 380...480 V Variable speed drive ATV630 wall mount, 45 kW, 200...240 V Variable speed drive ATV650 wall mount, 75 kW, 380...480 V Variable speed drive ATV650 wall mount, 90 kW, 380...480 V Variable speed drive ATV930 wall mount, 75 kW, 380...480 V Variable speed drive ATV930 wall mount, 90 kW, 380...480 V Variable speed drive ATV930 wall mount, 45 kW, 200...240 V Variable speed drive ATV950 wall mount, 75 kW, 380...480 V Variable speed drive ATV950 wall mount, 90 kW, 380...480 V Variable speed drive ATV34055 kW, 380...480 V Variable speed drive ATV34075 kW, 380...480 V
Product Specific Application	Radio interference input filter
Mounting Location	At variable speed drive side
Line Rated Current	200 A
Thermal losses	32.5 W
Phase	Three phase

Complementary

Electrical connection	Terminal 150 mm² 300 kcmil
Maximum motor cable length	492.1 ft (150 m) shielded motor cable 4 kHz IEC 61800-3 category C2, 380...480 V 984.3 ft (300 m) shielded motor cable 4 kHz IEC 61800-3 category C3, 380...480 V 492.1 ft (150 m) shielded motor cable 4 kHz IEC 61800-3 category C2, 200...240 V 984.3 ft (300 m) shielded motor cable 4 kHz IEC 61800-3 category C3, 200...240 V 164.04 ft (50 m) shielded motor cable 4 kHz IEC 61800-3 category C1, 200...240 V 164.04 ft (50 m) shielded motor cable 4 kHz IEC 61800-3 category C1, 380...480 V
maximum earth leakage current	13.9 mA 400 V 50 Hz TN 13.9 mA 400 V 50 Hz TT
power supply voltage	380...480 V 200...240 V
Tolerance	10 %
Mechanical robustness	Shocks class 3M4 IEC 60721-3-3 Vibrations class 3M4 IEC 60721-3-3
Width	7.9 in (200 mm)
Height	17.5 in (445 mm)
Depth	12.6 in (320 mm)
Product Weight	20.9 lb(US) (9.5 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

IP degree of protection	IP20mounting side by side IP21with kit VW3A47908
Relative humidity	5...95 % without condensation IEC 61800-5-1
Ambient air temperature for operation	14...122 °F (-10...50 °C) (without current derating) 122...140 °F (50...60 °C) (with current derating 1.5 % per °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Operating altitude	0...3280.84 ft (0...1000 m) without current derating 3280.84...13123.36 ft (1000...4000 m) with current derating 1 % per 100 m
Standards	IEC 61800-3

Ordering and shipping details

Category	US1CP4B22184
Discount Schedule	CP4B
GTIN	3606480736575
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	11.024 in (28.000 cm)
Package 1 Width	20.866 in (53.000 cm)
Package 1 Length	14.961 in (38.000 cm)
Package weight(Lbs)	37.199 lb(US) (16.873 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	4
Package 2 Height	29.528 in (75.000 cm)
Package 2 Width	23.622 in (60.000 cm)
Package 2 Length	31.496 in (80.000 cm)
Package 2 Weight	184.077 lb(US) (83.496 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Take-back	No

Dimensions Drawings

Dimensions

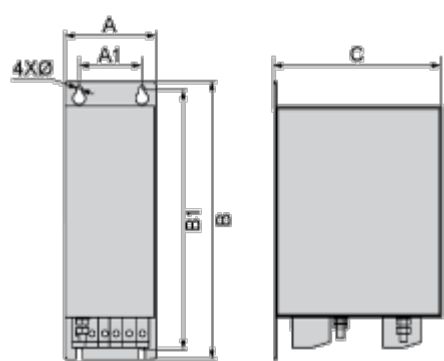

Dimensions in mm


A	B	C	A1	B1	Ø
200	445	320	140	415	11

Dimensions in in.

A	B	C	A1	B1	Ø
7.9	17.5	12.6	5.5	16.3	0.43

Connections and Schema

Recommended Schema

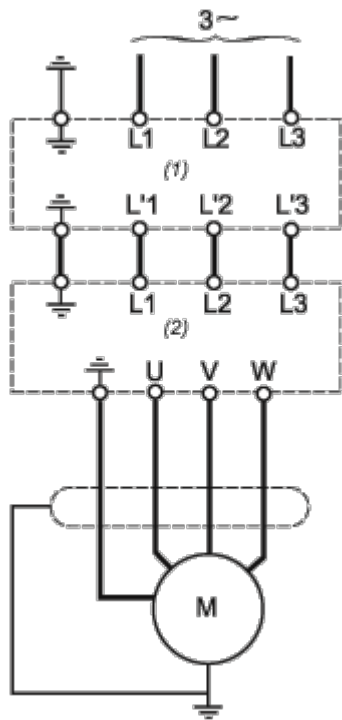

- (1) Filter
- (2) Drive