


Product data sheet

Specifications



Empty enclosure, Harmony XALK, XALD, plastic, yellow lid, for illuminated emergency stop push button 22mm, 1 cut out

XALKW01

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XALK
Product or Component Type	Empty control station
Device short name	XALK
Product destination	For XB5 Ø 22 mm control and signalling units
Control station application	Emergency stop function Emergency switching off function
Number of cut-out	1 cut-out
Colour of base of enclosure	Light grey RAL 7035)
Colour of cover	Yellow RAL 1021)
Material	Polycarbonate
Cable entry	1 knock-out for cable entry 0.6 in (14 mm) 2 knock-outs for Pg 13 cable gland and ISO M20 0.5 in (12 mm)
Sale per indivisible quantity	1
IP degree of protection	IP66 IEC 60529 IP67 IEC 60529 IP69 IEC 60529 IP69K ISO 20653 Type 13 UL 50E Type 12 UL 50E Type 4 UL 50E Type 4X UL 50E

Complementary

Assembly style	For customer assembly
Number of horizontal rows	1
Number of vertical rows	1
CAD overall width	2.7 in (68 mm)
CAD overall height	2.7 in (68 mm)
CAD overall depth	2.09 in (53 mm)
Product Weight	0.256 lb(US) (0.116 kg)
Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m
Mounting of block	Front mounting Rear mounting
electrical composition code	SR1 SF1 MR1 MF1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Main group	1 cut-out
Group of product	Standard yellow

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-40...158 °F (-40...70 °C)
Overvoltage category	Class II conforming to IEC 60536
IK degree of protection	IK05 conforming to IEC 62262
Standards	IEC 60947-5-5 IEC 60947-5-4 JIS C8201-5-1 IEC 60947-1 IEC 60947-5-1 JIS C8201-1

Ordering and shipping details

Category	US10CS222467
Discount Schedule	0CS2
GTIN	3606489745592
Returnability	Yes
Country of origin	CZ

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.8 in (7.0 cm)
Package 1 Width	2.8 in (7.0 cm)
Package 1 Length	3.0 in (7.5 cm)
Package weight(Lbs)	4.06 oz (115.0 g)
Unit Type of Package 2	S03
Number of Units in Package 2	60
Package 2 Height	11.8 in (30 cm)
Package 2 Width	11.8 in (30 cm)
Package 2 Length	15.7 in (40 cm)
Package 2 Weight	16.230 lb(US) (7.362 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	0.8 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.7 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions

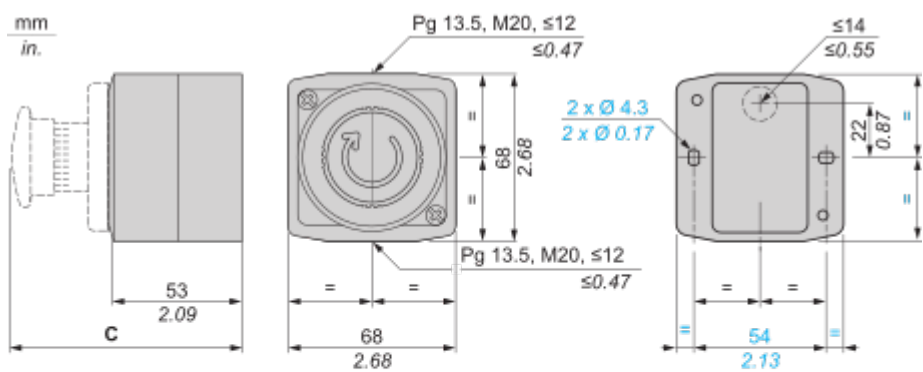

C		mm	in.
	XALK84W3BE, XALK84W3BG, XALK84W4BE, XALK84W4BG, XALK84W2ME, XALK84W2MG	96	3.78
	XALK178W3B140E, XALK178W3B140G XALK178W4B140E, XALK178W4B140G	93	3.66

Technical Illustration

Dimensions

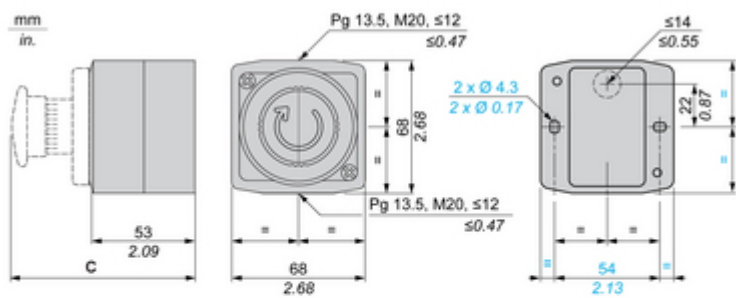

C	mm	in.
 XALK84W3BE, XALK84W3BG, XALK84W4BE, XALK84W4BG, XALK84W2ME, XALK84W2MG	96	3.78
 XALK178W3B140E, XALK178W3B140G XALK178W4B140E, XALK178W4B140G	93	3.66

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XALK



Complete stations for emergency stop function with a single mushroom head non-illuminated or illuminated function from XB5 range



Possibility to add up to 3 NO or NC contact blocks per operating head



Complete, ready-to-install stations with 1 to 3 buttons for the most common functions



Modular system and simple to cable universal range



Polycarbonate pre-drilled control stations



Offer Marketing Illustration

Product benefits / Features

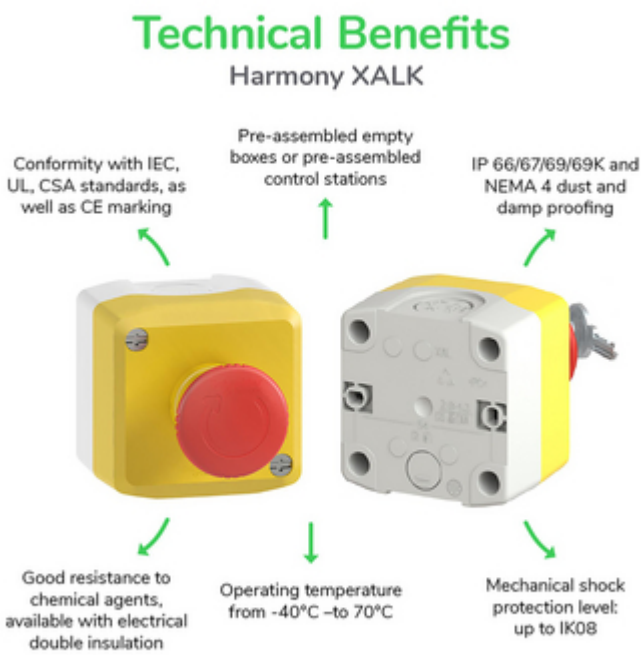


Image of product / Alternate images

Alternative



