

Product data sheet

Specifications



USB configurable monolithic tower light, Harmony XVGU, multi color programmable lights 60mm, steady/ flashing LED buzzer

XVGU3SWV

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XVGU
Product or Component Type	USB configurable monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Buzzer
Mounting diameter	2.4 in (60 mm)
Component name	XVGU
Light source	LED steady or flashing multi-colour
Indicator bank base type	Base with integrated buzzer
Noise level	82 dB 2 tone buzzer)1 m

Complementary

Material	PC: globe
Device mounting	Direct mounting
Light block color	Clear/clear/clear
[Us] rated supply voltage	5 V DC
Connector Type	USB type A female
Current Consumption	400 mA
Sound frequency	2700 Hz 3800 Hz
Power Consumption in W	2 W
Flashing frequency	2 Hz flashing LED unit 1 Hz flashing LED unit
Product compatibility	Vijeo Designer 4.6 indoor use only HMIGTO XBTGT..... XBTGK.... XBTGC1. XBTGC2. XBTGH
Product Weight	0.7 lb(US) (0.3 kg)

Environment

Standards	IEC 61000-6-2 IEC 61000-6-4
-----------	--------------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	GOST cUL CE RCM UL 508
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	32...131 °F (0...55 °C)
Electrical shock protection class	Class I
IP Degree of Protection	IP54

Ordering and shipping details

Category	US100XV22618
Discount Schedule	00XV
GTIN	3606480530944
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.110 in (7.900 cm)
Package 1 Width	3.110 in (7.900 cm)
Package 1 Length	12.244 in (31.100 cm)
Package weight(Lbs)	12.346 oz (350.000 g)
Unit Type of Package 2	S04
Number of Units in Package 2	21
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	15.748 in (40.000 cm)
Package 2 Length	23.622 in (60.000 cm)
Package 2 Weight	18.960 lb(US) (8.600 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	84
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	23.622 in (60.000 cm)
Package 3 Length	31.496 in (80.000 cm)
Package 3 Weight	94.596 lb(US) (42.908 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	19 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	4 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	15 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.7 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	6797f094-b2bf-48a4-981a-58794615fad0
EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	9
Circularity Profile	End of Life Information
Take-back	No

Dimensions Drawings


Dimensions

Direct Base Mounting

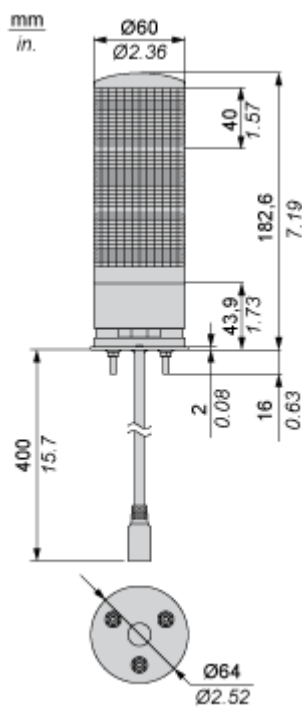


Mounting and Clearance

Mounting on Horizontal Support for Direct Base Mounting

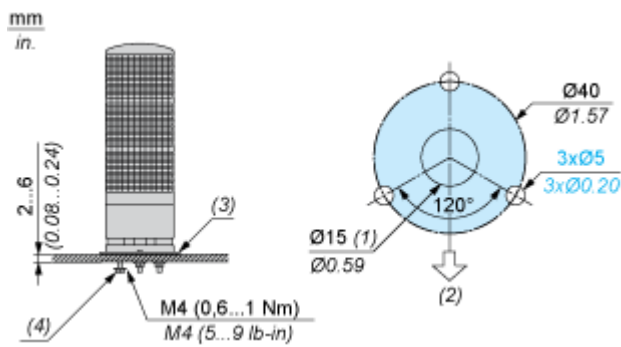

- (1) Cable outlet
- (2) Buzzer opening position
- (3) Waterproof rubber seal
- (4) Hexagon nut with flange

Mounting Orientation

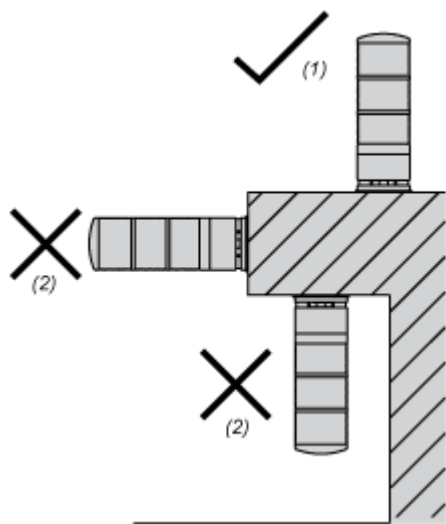


Choose a flat surface with enough strength and with little vibration for installation. Mount this product according to the figure to maintain IP characteristics

- (1) OK
- (2) NO

Technical Illustration


Dimensions

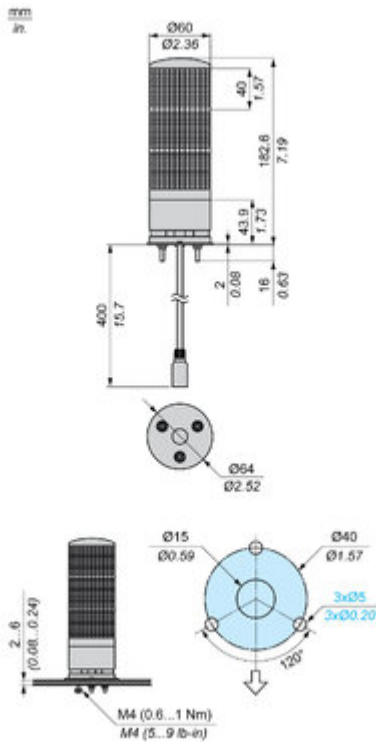

Offer Marketing Illustration

Product benefits / Features

Technical Benefits
Easy Harmony XVG

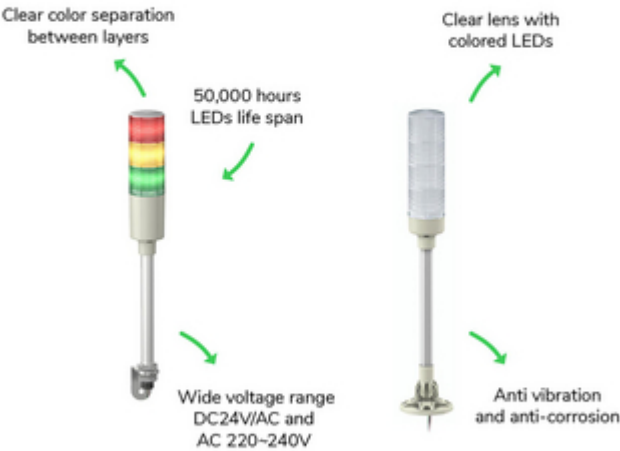

Offer Marketing Illustration

Product benefits / Features

Features

Easy Harmony XVG



Pre-assembled & Pre-wired with color code



Long distance machine status by clear lens design



Less maintenance thanks to LEDs



Integrated 85dB buzzer



Wide mounting options for all kind of applications

