

Product data sheet

Specifications



Remote control, Harmony eXLhoist, standard, display, 6 motion push buttons, 6 auxiliary push buttons

ZART12D

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Harmony eXLhoist
Product or Component Type	Hand-held remote control
Device short name	ZART
Control Button Type	6 configurable motion push-button 6 configurable auxiliary push-button

Complementary

Material	Enclosure PC (polycarbonate) Enclosure PBT (polybutylene terephthalate) Cover PP (polypropylene) Protective cover EPDM rubber
Function Available	Accelerometer function Vibrator function
Display type	LCD display 34 x 42 mm
Operating Distance	50 m
Mechanical robustness	Free fall resistance 4.5 m IEC 60068-2-27
Communication network type	Wireless bluetooth low energy
Transmission frequency	2.4 GHz
Maximum sensing distance	328.08 ft (100 m) in free field
Response time	< 300 ms full duplex
Charging time	900 s
Autonomy	30 h
Mechanical durability	5000000 cycles
Service Life	5 year(s)
Width	3.9 in (100 mm)
Height	13.4 in (340 mm)
Depth	3.5 in (90 mm)
Net Weight	1.43 lb(US) (0.65 kg)

Environment

Radio agreement	FCC ARIB RSS ICASA ANATEL SRRC
-----------------	---

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

IP degree of protection	IP65
NEMA degree of protection	NEMA 4
Ambient Air Temperature for Operation	-4...140 °F (-20...60 °C)
Ambient Air Temperature for Storage	-4...113 °F (-20...45 °C)
Operating altitude	0...6561.68 ft (0...2000 m)
Storage altitude	0...9842.5 ft (0...3000 m)
Vibration resistance	0.075 mm 10...55 Hz)IEC 60068-2-6
Shock resistance	100 gn IEC 60068-2-27
Relative humidity	0...95 % -4...140 °F (-20...60 °C) operating
Product Certifications	C-tick CSA CE JIS KC EAC UL

Ordering and shipping details

Category	US10CS222479
Discount Schedule	0CS2
GTIN	3606480610370
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.21 in (10.700 cm)
Package 1 Width	4.02 in (10.200 cm)
Package 1 Length	13.27 in (33.700 cm)
Package weight(Lbs)	26.420 oz (749.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	4
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	7.683 lb(US) (3.485 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	6e438e59-42d1-4633-bfe2-cb5ef607659b
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions Drawings

Dimensions

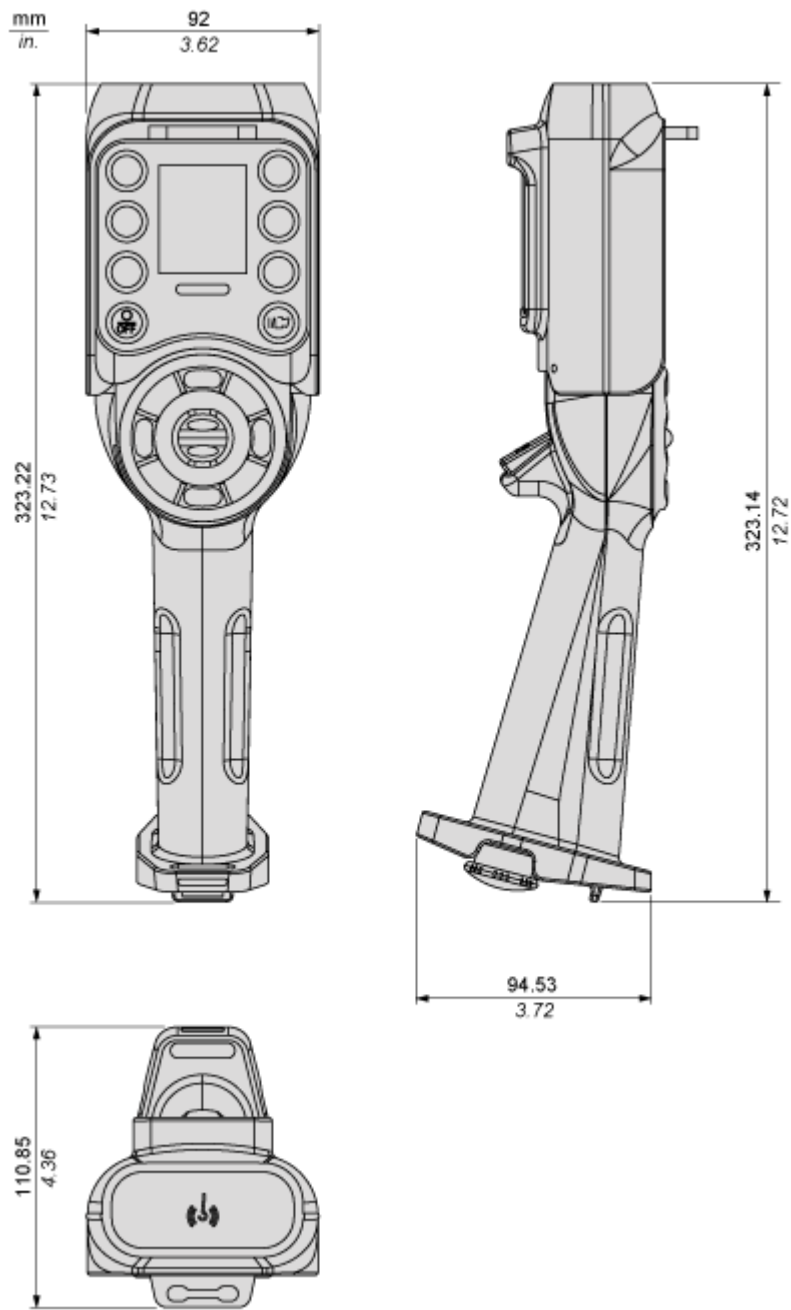

Technical Illustration

Dimensions

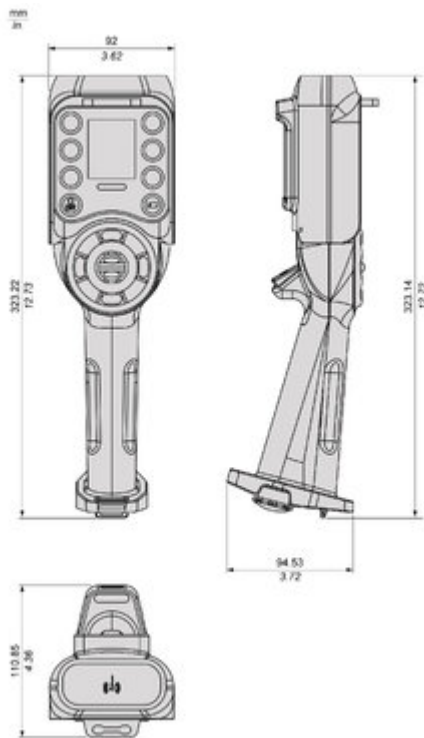

Offer Marketing Illustration

Product benefits / Features

Technical benefits
ZAR Harmony Pocket remote

The Harmony Pocket Remote uses the worldwide free 2.4 GHz frequency to allow unrestricted operation.

Product certifications:
CE, UL
Radio certifications:
FCC, IC



The diagram shows a black, foldable remote control. The left side is the back, showing a battery compartment and a small antenna. The right side is the front, featuring a green faceplate with four black buttons numbered 1 through 4. The Schneider Electric logo is visible at the bottom of the green faceplate. Four green arrows point from the text blocks to the remote: one to the back, one to the top of the front faceplate, one to the bottom of the front faceplate, and one to the right side of the front faceplate.

Users can integrate 3, 4, 6, 8 or 10 buttons according to their needs

IP 67 for the transmitter and IP 66 for the receiver

Offer Marketing Illustration

Product benefits / Features

Features

ZAR Harmony Pocket remote

Offers mobility solutions to improve operator efficiency and reduce installation time

A large, rectangular, black remote control with a screen and buttons, shown being held by a hand.

Large set of colors and pictures to customize the front face of your pocket

Suitable for controlling all kinds of machines

Three different models of the ZAR Harmony Pocket remote, each with a different color scheme: black, orange, and blue.

Relative humidity 0...95% to -20...55°C operation

Battery life: > 100 h with alkaline batteries

Image of product / Alternate images

Alternative







Image of product in real life situation

