

Product data sheet

Specifications



Contact block, Harmony XB4, Harmony XB5, single contact, silver alloy, screw clamp terminal, 1NC with monitoring contact

ZBE302

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XB4 Harmony XB5
Product or Component Type	Contact block
Device short name	ZBE
Sale per indivisible quantity	5
IP degree of protection	IP20 IEC 60529
Contact operation	Slow-break
Contact block type	Single
Contacts usage	Monitoring contact
Connections - terminals	Screw clamp terminals, <= 2 x 1.5 mm ² with cable end IEC 60947-1 Screw clamp terminals, >= 1 x 0.34 mm ² without cable end IEC 60947-1

Complementary

CAD overall width	0.4 in (10 mm)
CAD overall height	1.6 in (41 mm)
CAD overall depth	1.02 in (26 mm)
Product Weight	0.029 lb(US) (0.013 kg)
Contacts type and composition	1 NC monitoring contact
Positive opening	With IEC 60947-5-1 appendix K
Operating travel	0.06 in (1.5 mm) NC changing electrical state) 0.2 in (4.3 mm) total travel)
Operating force	5 N NC changing electrical state
Mechanical durability	300000 cycles
Tightening torque	7.08...10.6 lbf.in (0.8...1.2 N.m) IEC 60947-1
Shape of screw head	Cross pozidriv No 1 Slotted flat Ø 4 mm Slotted flat Ø 5.5 mm
Contacts material	Silver alloy (Ag/Ni)
Short-circuit protection	6 A cartridge fuse gG IEC 60947-5-1
[Ith] conventional free air thermal current	6 A IEC 60947-5-1
[Ui] rated insulation voltage	300 V 3)IEC 60947-1
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Ie] rated operational current	1.5 A 240 V, AC-15, B300 IEC 60947-5-1 3 A 120 V, AC-15, B300 IEC 60947-5-1 0.11 A 250 V, DC-13, R300 IEC 60947-5-1 0.22 A 125 V, DC-13, R300 IEC 60947-5-1
Electrical durability	300000 cycles, AC-15, 2 A 230 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C 300000 cycles, AC-15, 3 A 110 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C 300000 cycles, AC-15, 3 A 24 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C 300000 cycles, DC-13, 0.3 A 120 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C 300000 cycles, DC-13, 1 A 24 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C
Electrical reliability	$\Lambda < 10\exp(-7)$ 5 V 1 mA in clean environment IEC 60947-5-4 $\Lambda < 10\exp(-8)$ 17 V 3.4 mA in clean environment IEC 60947-5-4
Mounting of block	Front mounting
Device presentation	Basic element

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-40...158 °F (-40...70 °C)
Standards	IEC 60947-1 IEC 60947-5-1 IEC 60947-5-4 UL 60947-5-1 CSA C22.2 No 60947-5-1 JIS C8201-1 JIS C8201-5-1 GB/T 14048.5 BS EN 60947-5-1 GOST IEC 60947-5-1
Product Certifications	CSA EAC BV DNV CE LROS (Lloyds register of shipping) CCC UL Listed CB Scheme UKCA
Vibration resistance	5 gn ($f = 10 \dots 500$ Hz) conforming to IEC 60068-2-6 25 mm peak to peak ($f = 2 \dots 10$ Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27 25 gn 6 ms) 1000 shocks on each axis IEC 60068-2-27

Ordering and shipping details

Category	US10CS222469
Discount Schedule	0CS2
GTIN	3606482035027
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	0.551 in (1.400 cm)

Package 1 Width	1.299 in (3.300 cm)
Package 1 Length	1.654 in (4.200 cm)
Package weight(Lbs)	0.459 oz (13.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	1.693 in (4.300 cm)
Package 2 Width	2.087 in (5.300 cm)
Package 2 Length	2.283 in (5.800 cm)
Package 2 Weight	2.610 oz (74.000 g)
Unit Type of Package 3	S01
Number of Units in Package 3	210
Package 3 Height	5.906 in (15.000 cm)
Package 3 Width	5.906 in (15.000 cm)
Package 3 Length	15.748 in (40.000 cm)
Package 3 Weight	7.381 lb(US) (3.348 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	0.1 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.1 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Average percentage of recycled plastic content	23 %
Average percentage of recycled metal content	13 %
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	98
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions



e : clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Technical Illustration

Dimensions

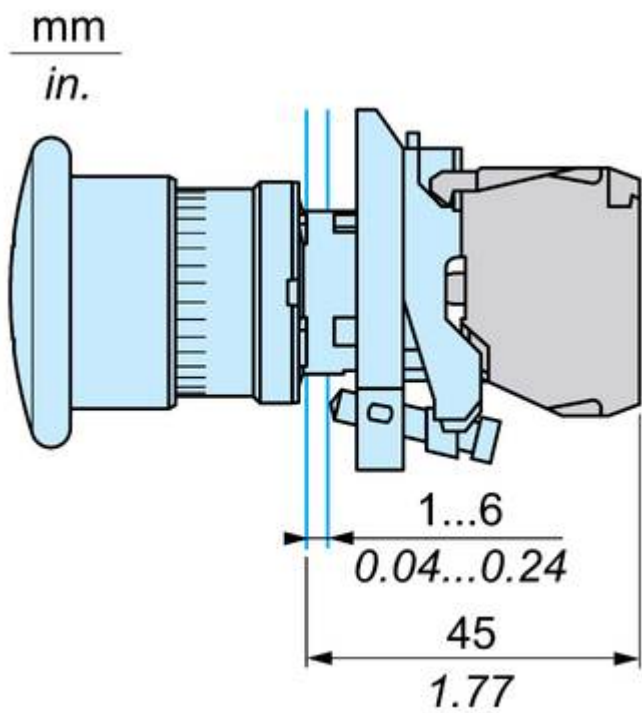

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB4/XB5 Monitoring Contact



Install as a standard NC contact block



Compatible with plastic and metal emergency stop pushbutton



Integrated monitoring function without extra cabling



Tested with Harmony XPS safety relay



Offer Marketing Illustration

Product benefits / Features

Technical benefits

Harmony XB4/XB5 Monitoring Contact



Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB4



Quick and easy assembly and disassembly



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Excellent mechanical connection with operator head



Large set of accessories to customize your panels



Robustness to withstand harsh environments



Offer Marketing Illustration

Product benefits / Features

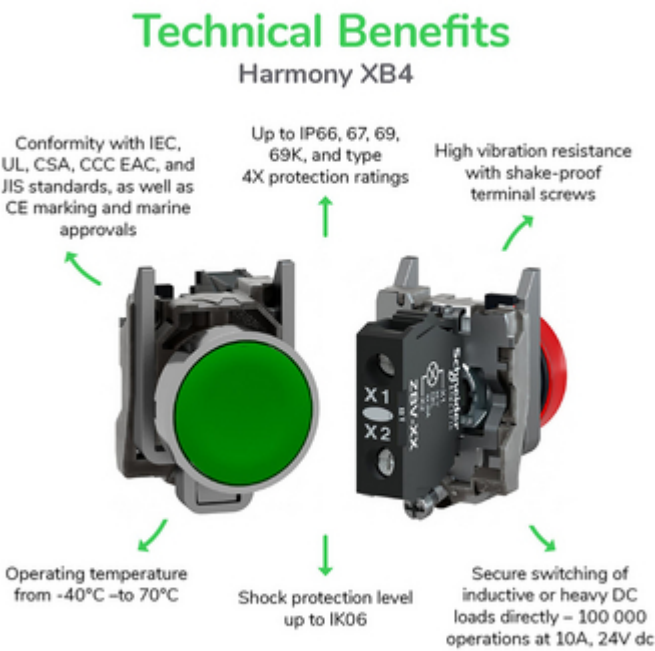


Image of product / Alternate images

Alternative





