Product data sheet
Characteristics

8911DPSO33V06
NEMA starter, Definite Purpose, 30A, 20HP at 600VAC, 3 phase, 3 pole, melting alloy, 480VAC coil, open

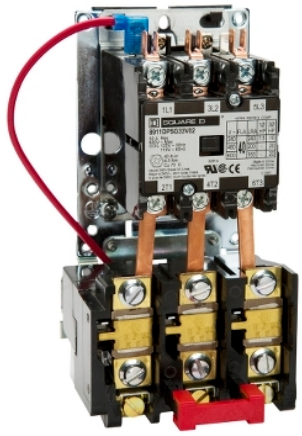

Main

Product	Definite Purpose Starter
Ampere Rating	30 A
Horsepower Rating	2 Hp 115 V AC, 1 phase 5 Hp 230 V AC, 1 phase 10 Hp 230 V AC, 3 phase 15 Hp 460 V AC, 3 phase 20 hp 575 V AC, 3 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	440 V AC 50 Hz 480 V AC 60 Hz
Phase	3 phase

Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	180 A 230 V AC 150 A 460 V AC 120 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

Ordering and shipping details

Category	21381-8911 DP
Discount Schedule	CP1
GTIN	785901081548
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.10 in (12.954 cm)
Package 1 Width	4.80 in (12.192 cm)
Package 1 Length	8.40 in (21.336 cm)
Package 1 Weight	2.39 lb(US) (1.084 kg)

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Contractual warranty

Warranty	18 months