


CABLE MECHANISMS FOR USE WITH CLASS 9422
TYPE NSJ 4 POLE CIRCUIT BREAKER.

TYPE	CABLE LENGTH	MAXIMUM BOX DEPTH	MAXIMUM DISTANCE FROM TOP RIGHT MOUNTING HOLE TO UPPER MOUNTING HOLE FOR HANDLE OPERATOR (DIM C)	
			MINIMUM C	MAXIMUM C
CSJ304	36"	24"	3.75"	7"
CSJ504	60"	36"	3.75"	24"
CSJ104	120"	36"	3.75"	5 FEET

REFER TO NEC ARTICLE 430-10 FOR MINIMUM DIMENSION X FROM CIRCUIT BREAKER TOP MOUNTING HOLE TO WALL OR BARRIER TO ENSURE ADEQUATE WIRE BENDING SPACE.

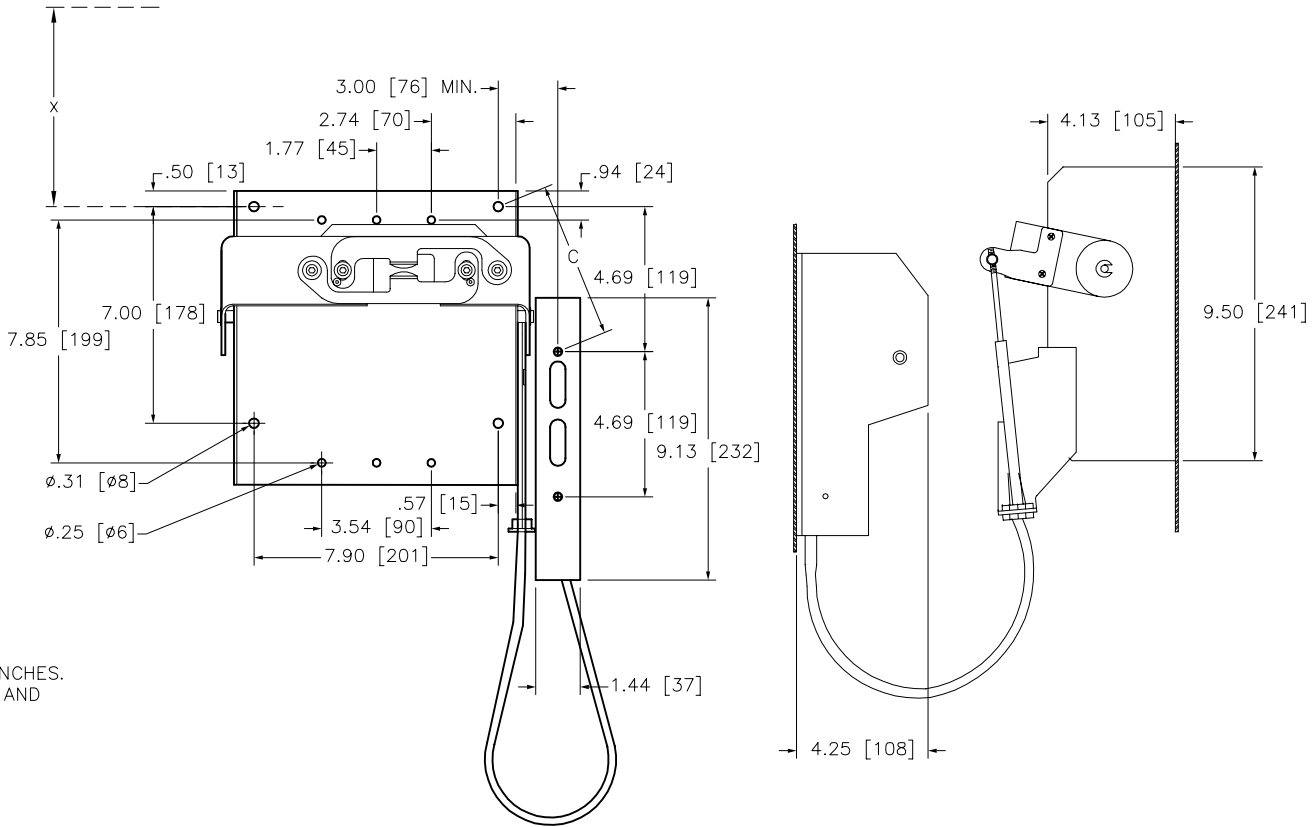

NOTE: BEND RADIUS IN CABLE MUST NEVER BE LESS THAN 6 INCHES.
ELECTRICAL CLEARANCES MUST BE MAINTAINED BETWEEN CABLE AND LIVE ELECTRICAL PARTS.

Catalog Number: 9422-CSJ304, CSJ504, CSJ104
Ratings: -
UL File/CCN: E62922/DIHS2
CSA File/Class: -
Meets Standards: -
Weight: 9.2 lbs
Wire Size: -
Terminal torque: -
Mounting Hwd: (10) #14-20 screws

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY. USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR TO INCORPORATING IN A DESIGN FILE."

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

THIRD ANGLE PROJECTION
TOLERANCES
UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMALS ± .01

4 POLE CIRCUIT BREAKER
CABLE OPERATOR MECHANISM
CLASS 9422 TYPE CSJ304, CSJ504, CSJ104

 **SQUARE D COMPANY**

DWG# 9422_CSJ_OUTLINE_002
NO.