


TENANT SERVICE DISCONNECTS (ORDER ONE PER SOCKET POSITION)			
TENANT CIRCUIT BREAKER CATALOG DESIGNATION (2-POLE)	CURRENT RATING AMPERES MIN – MAX	SHORT CIRCUIT BREAKER RATING RMS SYMMETRICAL AMPERES MAX ▲	VOLTS MAX
QBP-TM	70 – 125	10,000	240
QDP-TM	70 – 125	25,000	
QGP-TM	70 – 125	65,000	
QUP-TM	70 – 125	100,000	

KNOCKOUTS					
SYMBOL	CONDUIT SIZE		HOLE DIAMETER		
	IN	MM	IN	MM	
A	.50	13	.88	22	
B	.75	19	1.25	32	
C	1.00	25	1.38	35	
D	1.25	32	1.75	44	
E	1.50	38	2.00	51	
F	2.00	51	2.50	64	
G	2.50	64	3.00	76	
H	3.00	76	3.63	92	
I	3.50	89	4.13	105	
J	4.00	102	4.63	118	

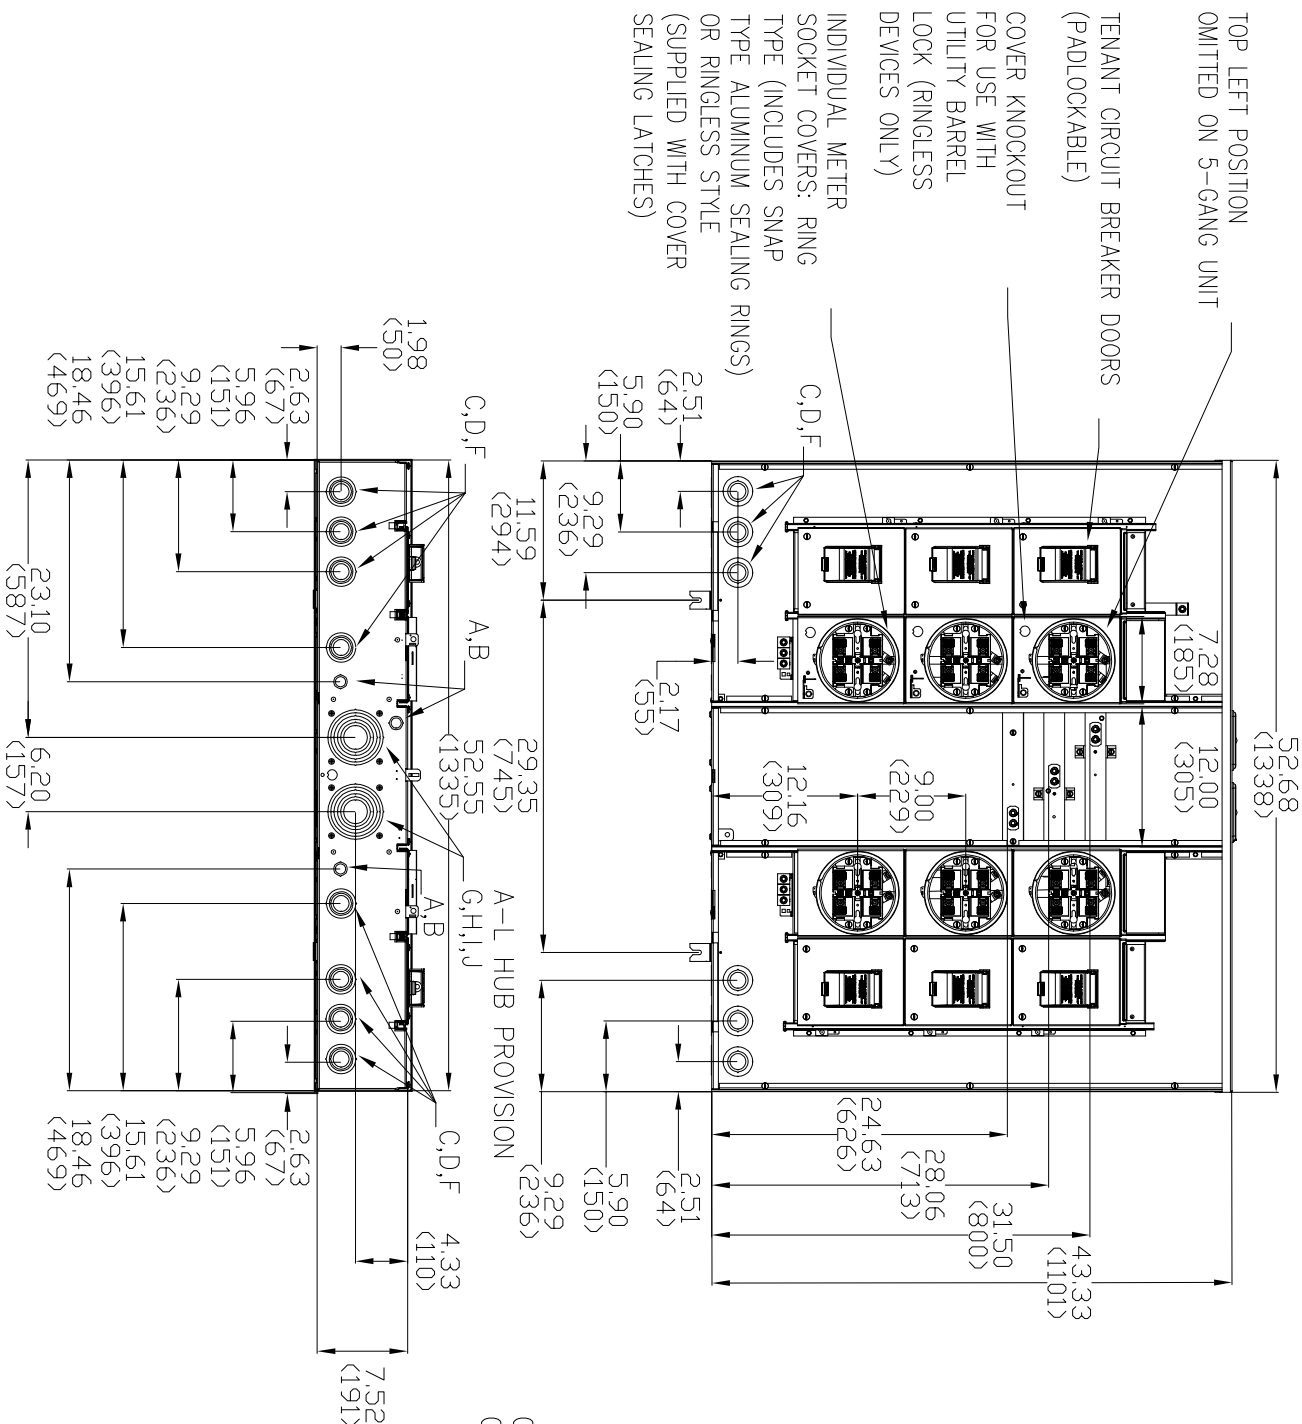

NOTES:

FINISH - UL COMPONENT RECOGNIZED GRAY BAKED POWDER COAT PAINT OVER GALVANNEALED STEEL.

UL LISTED - FILE E-6294. SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT. SUITABLE FOR OH/UG SERVICE

LOAD PHASE LUGS ARE SUPPLIED AS A PART OF THE CIRCUIT BREAKER (TENANT SERVICE DISCONNECT).

SHORTEST CURRENT RAINING OF MEIER CENTER IS EQUAL TO THE RAINING OF THE LOWEST INSTALLED TENANT SERVICE DISCONNECT.


RING-TYPE DEVICE SUPPLIED WITH 4-JAW METER SOCKET, 5TH JAW KIT AVAILABLE.

SURFACE MOUNT.


MECHANICAL LUGS FACTORY INSTALLED, LUG LANDING PADS AVAILABLE

LUGS LARGER THAN 600 KCML REQUIRE USE OF LUG LANDING PADS (ORDER CATALOG NUMBER MMSK2 SEPARATELY)

THIS DEVICE MEETS UL & NEC LATEST REQUIREMENTS FOR SERVICE DISCONNECT COMPARTMENTALIZATION

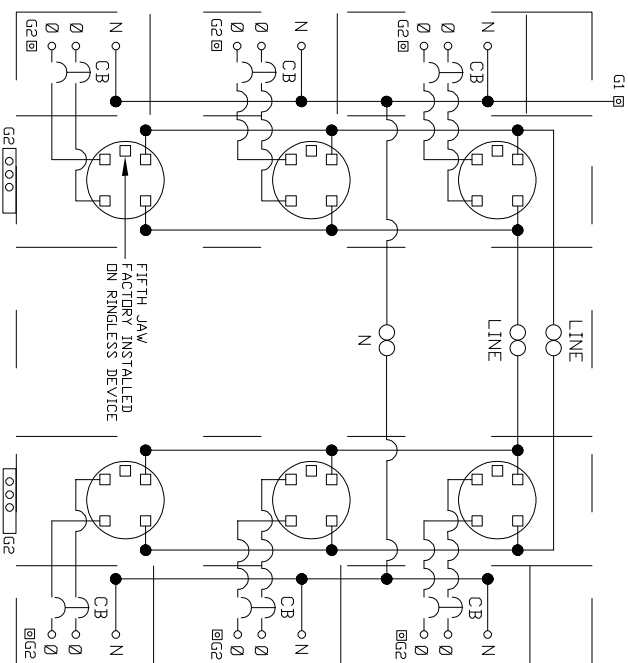


G1 – Service Ground Electro Conductor
G2 – Equipment Grounding

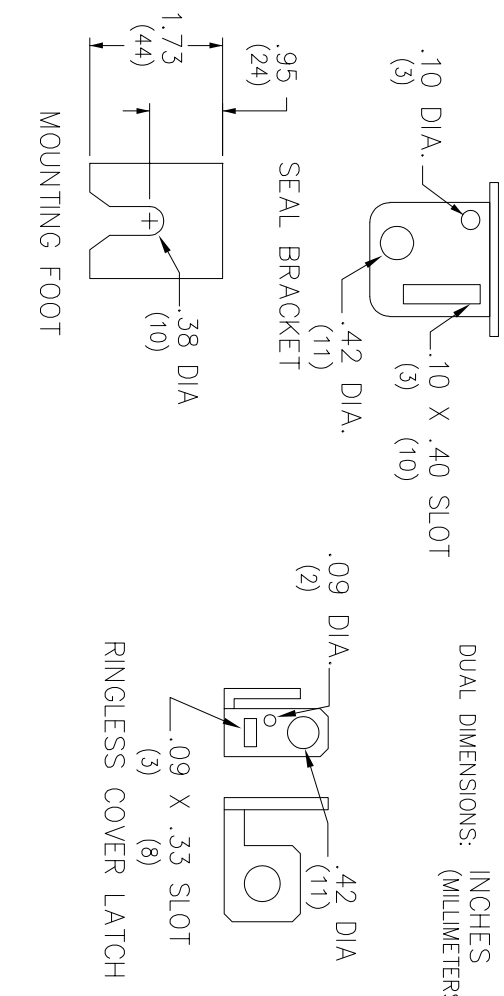

METER SOCKET COVER		NO. OF METER SOCKETS	NO. OF JAWS	FACTORY INSTALLED BYPASS	120/240VAC, 1Ø3W DR 120/208 VAC, 1Ø3W (DERIVED FROM A 208Y/120 VAC, 3Ø4W NETWORK) (5TH JAW REQUIRED)		LOAD LUG WIRE SIZES (AWG-KCML)		
					MAIN BUS RATING	CATALOG NUMBER	LINE LUG WIRE SIZED (AWG/KCML)	PHASE 	NEUTRAL, SERVICE GROUND & CONVENIENCE EQUIPMENT GROUND
RING-TYPE	5	4	NDNE	500	MPCS5125	PHASE AND NEUTRAL	SEE CIRCUIT BREAKER WIRE SIZE	4-300	2/0-14 CU 2/0-12 AL
RING-TYPE	6	4	NDNE	600	MPG66125				
RINGLESS	5	5	NDNE	500	MPCR55125				
RINGLESS	6	5	HDNR	600	MPCR66125				
RINGLESS	5	5	NDNE	500	MPCH55125				
RINGLESS	6	5	HDNR	600	MPCH66125				

MP METER-PAK COMPARTMENTALIZED
DISCONNECT METERING EQUIPMENT
UL TYPE 3R ENCLOSURE
125A MAXIMUM TENANT SERVICE DISCONNECT

DWG.
NO. —